


POWER TRANSFORMER

查询"DST3-40"供应商

DST3-40 (F) SERIES


1. CONFIGURATION & DIMENSIONS :

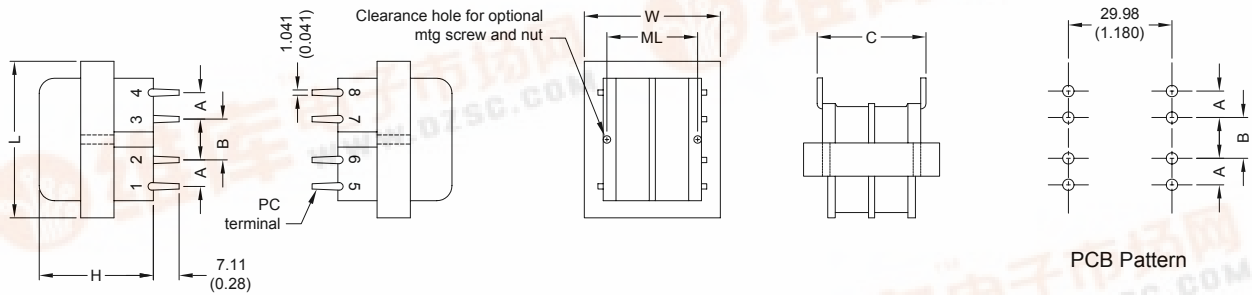

UNIT : mm (inch)

| SIZE | VA | L | W | H | ML | A | B | C | Optional mtg. screw & nut* | gram |
|------|-----|-----------------|------------------|-----------------|------|----------------|----------------|------------------|----------------------------|------|
| 3 | 2.4 | 35.50 (1.40) | 30.00 (1.180) | 30.50 (1.20) | ---- | 6.35 (.250) | 6.35 (.250) | 30.48 (1.200) | None | 112 |

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|------------------------------|
| a. Primary Voltage | AC 115/230 V 50/60 Hz . |
| b. No Load Primary Current | Less Than 15mA . |
| Input AC 115V 60Hz . | Less Than 15mA . |
| Input AC 230V 50Hz . | Series AC 54.20V . |
| c. Secondary Voltage (±5%) | Parallel AC 27.10V . |
| d. Secondary Load Current | Series 0.06A . |
| | Parallel 0.12A . |
| e. Full Load Primary Current | Less Than 25mA . |
| Input AC 115V 60Hz . | Less Than 40mA . |
| Input AC 230V 50Hz . | Series 40.00V . |
| f. Full Load Secondary Voltage (±5%) | Parallel 20.00V . |
| g. DC Resistance | Primary = 729 Ohm . |
| Pin 1-2 | = 925 Ohm . |
| Pin 3-4 | Secondary = - Ohm . |
| Pin 5-6 | = - Ohm . |
| Pin 7-8 | DC 500V 100Meg Ohm Of More . |
| h. Insulation Resistance | AC 2500V 60Hz 1 Minutes . |
| i. Withstand Voltage (Hi-Pot) | Less Than 60 Deg C . |
| j. Temperature Rise | EI-35 x 14.00 m/m . |
| k. Core Size | |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

