

DIMM Socket for Memory Expansion

[查询"DMM-100G-432FNK31"供应商](#)

In Accordance with JEDEC Standard DMM Series, 100 Contacts



- Laser Printers, Fax machines, Terminals, Peripherals

FEATURE

- Applicable to 100-position DIMM module board in accordance with JEDEC standard
- Voltage keying design for 5V modules
- Insulator molded from surface mount compatible polyamide material
- Locking ejectors hold module in place during vibration

F

DMM(100)

SPECIFICATION

Voltage rating	250 V AC (rms)
Current rating	0.5A/contact
Dielectric withstanding voltage	500V AC (rms) for 1 minute
Insulation resistance	500M Ω min. at 500V DC
Contact resistance	40m Ω max.

MATERIAL/FINISH





Contact/Finish	Copper alloy/0.38 μ m Gold over Nickel (mating), Tin-Lead (tail)
Insulator	Polyamide resin (UL94V-O)/Black
Ejector	Polyamide resin (UL94V-O)/Black

DMM Series (100 Contacts)

查询"DMM-100G-432FNK31"供应商

Unit : mm

DMM-100G-432FNK31

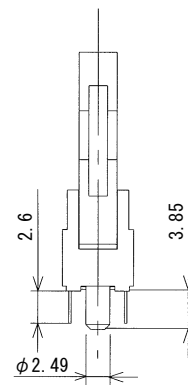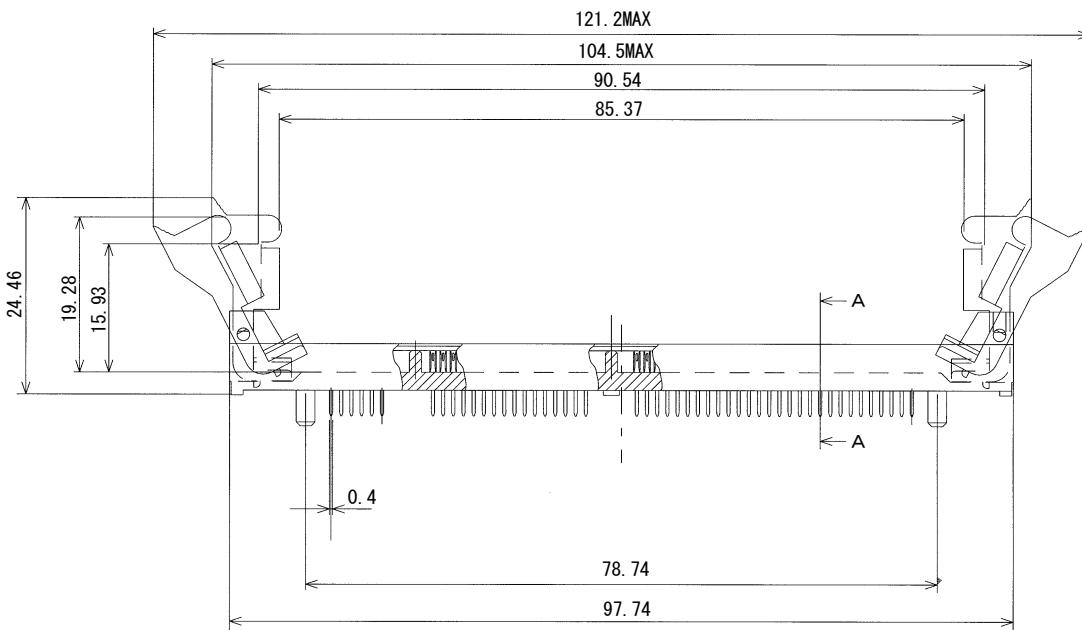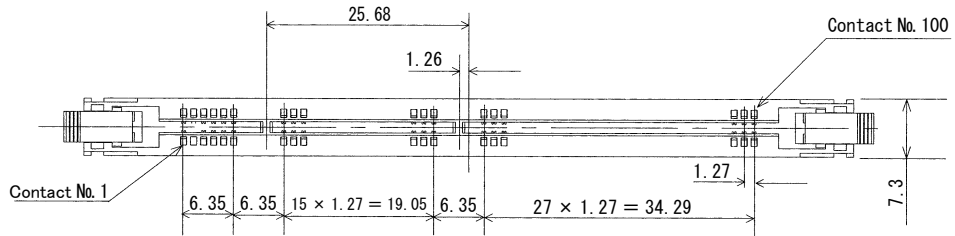

Section A-A


F
DMM(100)

DMM Series (100 Contacts)

查询"DMM-100G-432FNK31"供应商



Unit : mm

PCB Mounting Dimensions (Connector Mount Side)

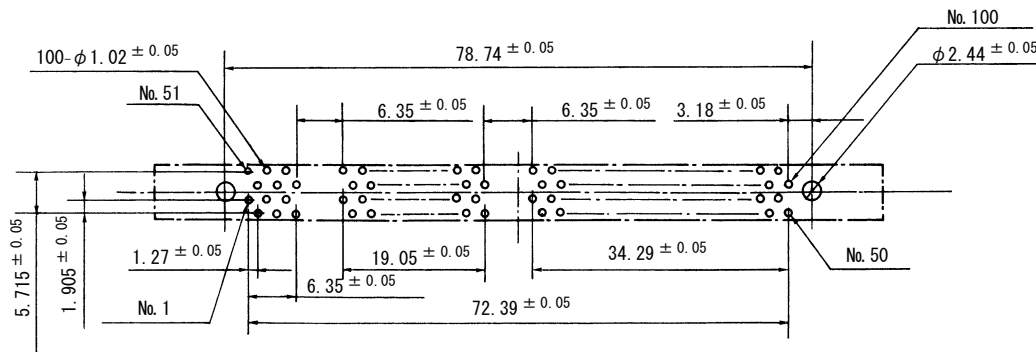


Module Dimensions

F
DMM(100)

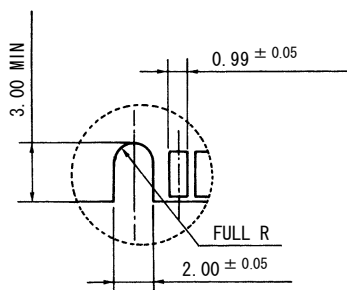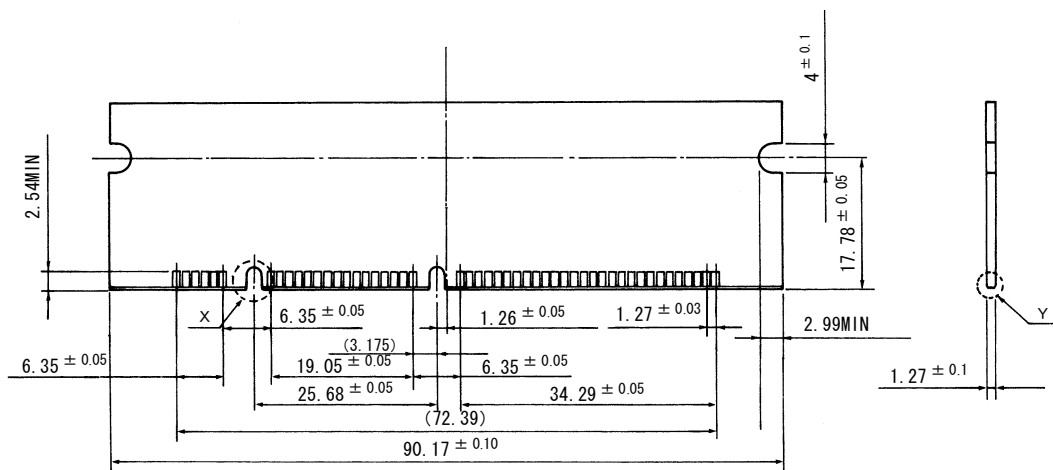

Detail "X"



Detail "Y"

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn