

INTRODUCTION:

Adam Tech Straight PCB tail D-Sub connectors are a popular interface for many I/O applications. Offered in 9, 15, 25, 37 and 50 positions they are an excellent choice for a low cost, sturdy, full metal body industry standard connection. These connectors are manufactured with precision stamped or machined turned contacts offering a choice of contact plating and a wide selection of mating and mounting options.

FEATURES:

Industry standard compatibility

Durable metal shell design

Precision formed contacts

Variety of Mating and mounting options

MATING CONNECTORS:

Adam Tech D-Subminiatures and all industry standard D-Subminiature connectors.

SPECIFICATIONS:

Material:

Standard insulator: PBT, 30% glass reinforced, rated UL94V-0

Optional Hi-Temp insulator: Nylon 6T

Insulator Colors: Black (White optional)

Contacts: Phosphor Bronze

Shell: Steel, Tin or Zinc plated

Hardware: Brass, Nickel plated

Contact Plating:

Gold Flash (15 and 30 μ in Optional) over Nickel underplate overall

Electrical:

Operating voltage: 250V AC / DC max.

Current rating: 5 Amps max.

Contact resistance: 20 m Ω max. initial

Insulation resistance: 5000 M Ω min.

Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 0.75 lbs max

Extraction force: 0.44 lbs min

Temperature Rating:

Operating temperature: -65°C to +125°C

Soldering process temperature:

Standard insulator: 235°C

Hi-Temp insulator: 260°C

PACKAGING:

Anti-ESD plastic trays

APPROVALS AND CERTIFICATIONS:

UL Recognized File No. E224053

CSA Certified File No. LR1578596



HI-TEMP
INSULATOR
AVAILABLE



ORDERING INFORMATION

DB25

ST

1

SL

SHELL SIZE/ POSITIONS

DE09 = 9 Position

DA15 = 15 Position

DB25 = 25 Position

DC37 = 37 Position

DD50 = 50 Position

CONTACT TYPE

PT = Plug, Straight PCB Tail, Standard Profile

ST = Socket, Straight PCB Tail, Standard Profile

PE = Plug, Straight PCB Tail, High Profile

SE = Socket, Straight PCB Tail, High Profile

MOUNTING OPTIONS

Blank = .120" Mounting Holes

SL = Bottom side riveted #4-40 Clinch Nuts

JS = Top side riveted #4-40 Jackscrews

BL = Riveted #4-40 Internal Threaded Standoffs with Boardlocks

R = Riveted Round Jack Screws

JSL = Bottom side riveted #4-40 Clinch Nuts with Jack Screws installed

TERMINAL LENGTH

1 = Standard tail length for .062" thru .125" PCB's (E = .189")

2 = Wire wrap tail (E = .512")

OPTIONS:

Add designator(s) to end of part number




15 = 15 μ in gold plating in contact area

30 = 30 μ in gold plating in contact area

EMI = Ferrite filtered version for EMI / RFI suppression (Page 72)




HT = Hi-Temp insulator for hi-temp soldering processes up to 260°C

PLUG

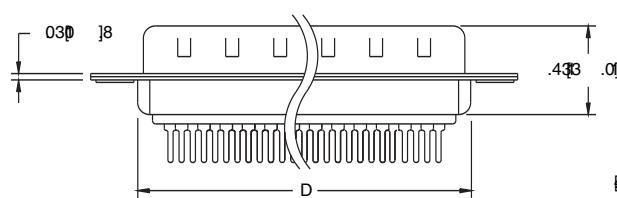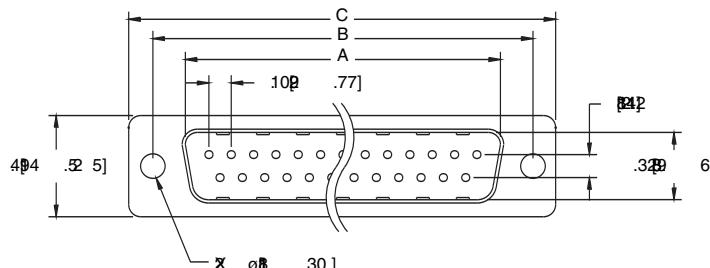


*E = .189" or .512"

SOCKET

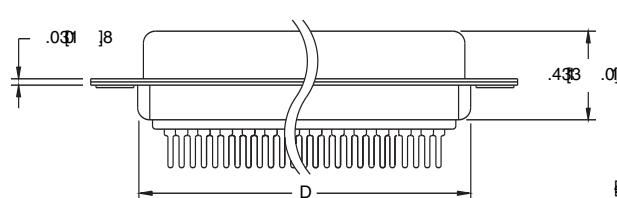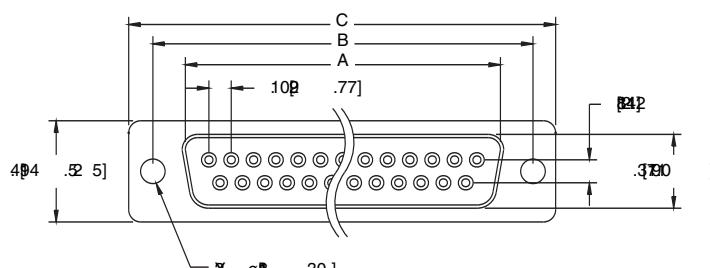


*E = .189" or .512"

Mounting Options




SL Option

Bottom side riveted #4-40
Clinch Nuts




JS Option

Top side riveted #4-40
Jack Screws



BL Option


#4-40 Threaded Boardlocks



Wire Wrap Tail Option

Unit: Inch [mm]

| Positions | PLUG | SOCKET | DIMENSIONS | | |
|-----------|---------------|---------------|---------------|---------------|---------------|
| | A | A | B | C | D |
| 9 | .666 [16.92] | .643 [16.33] | .984 [24.99] | 1.213 [30.81] | .756 [19.20] |
| 15 | .994 [25.25] | .971 [24.66] | 1.312 [33.32] | 1.541 [39.14] | 1.091 [27.70] |
| 25 | 1.534 [38.96] | 1.511 [38.38] | 1.852 [47.04] | 2.088 [53.04] | 1.618 [41.10] |
| 37 | 2.182 [55.43] | 2.159 [54.84] | 2.500 [63.50] | 2.729 [69.32] | 2.256 [57.30] |
| 50 | 2.079 [52.81] | 2.064 [52.43] | 2.406 [61.11] | 2.637 [67.00] | 2.169 [55.10] |

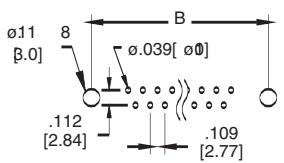

Recommended PCB Layout