

APPLICATIONS

- ✓ Cellular Phones
- ✓ Personal Digital Assistant (PDA)
- ✓ Notebook Computers
- ✓ SMART Cards

IEC COMPATIBILITY (EN61000-4)



- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES

- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Voltages Ranging From 3.3V to 36V
- ✓ 200 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- ✓ Low Clamping Voltage
- ✓ Bidirectional Configuration & Monolithic Structure
- ✓ Protects 3 to 5 Lines
- ✓ Low Capacitance
- ✓ Low Leakage Current
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ Standard EIA Chip Size: 0406
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Available in Lead-Free Plating
- ✓ Solder Reflow Temperature:
Lead-Free - Sn/Ag/Cu, 96/3.5/0.5: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✓ Device Marking On Reel
- ✓ Top Contacts: Solder Bump 0.004" in Height (Nominal)

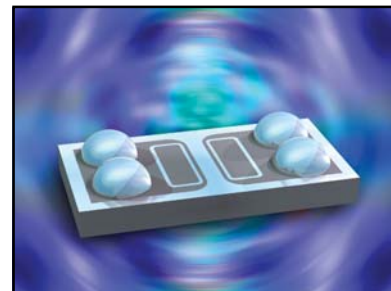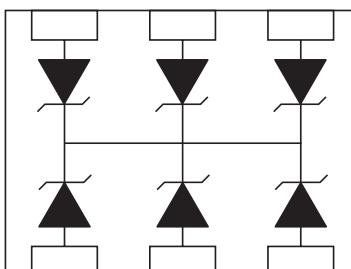**0402 CHIP SHOWN****PIN CONFIGURATION**

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P _{PP}	200	Watts
Operating Temperature	T _A	-55 to 150	°C
Storage Temperature	T _{STG}	-55 to 150	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V _{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA V _(BR) VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ I _p = 1A V _C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20μs V _C @ I _{PP}	MAXIMUM LEAKAGE CURRENT (See Note 2) @ V _{WM} I _D μA	TYPICAL CAPACITANCE @ 0V, 1 MHz C pF
LC0406FC3.3C	3.3	4.0	7.0	12.5V @ 16A	75*	70
LC0406FC05C	5.9	6.0	11.0	13V @ 15A	10**	35
LC0406FC08C	8.0	8.5	13.2	18V @ 11A	1	32
LC0406FC12C	12.0	13.3	19.8	26.9V @ 7.4A	1	30
LC0406FC15C	15.0	16.7	25.4	34.5V @ 5.8A	1	25
LC0406FC24C	24.0	26.7	37.2	50.6V @ 4A	1	20
LC0406FC36C	36.0	40.0	70.0	80.0V @ 2.5A	1	18

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.

Note 2: *Maximum leakage current < 5μA @ 2.8V. **Maximum leakage current < 500nA @ 3.3V.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME





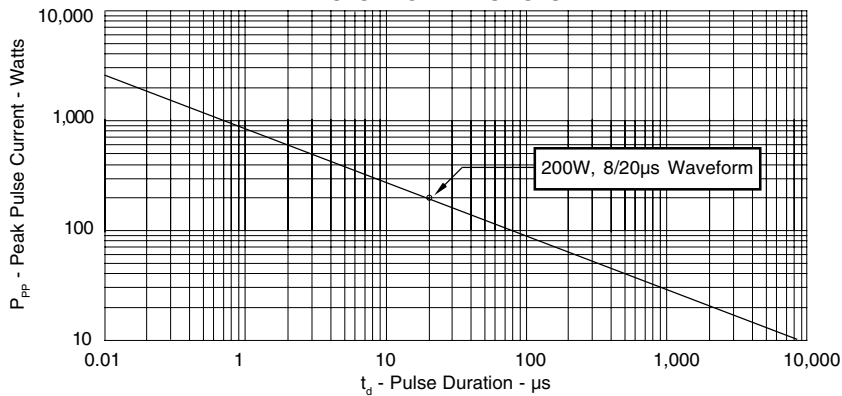


FIGURE 2
PULSE WAVE FORM

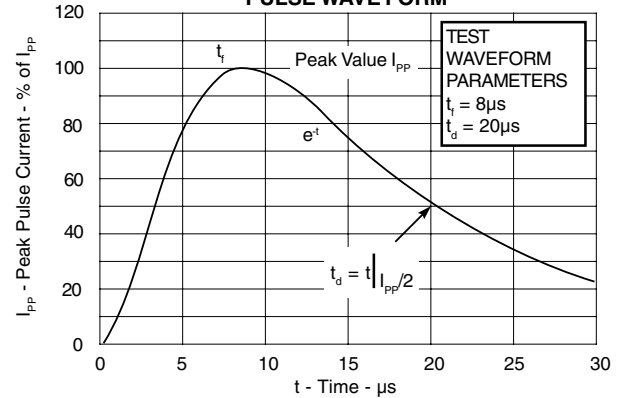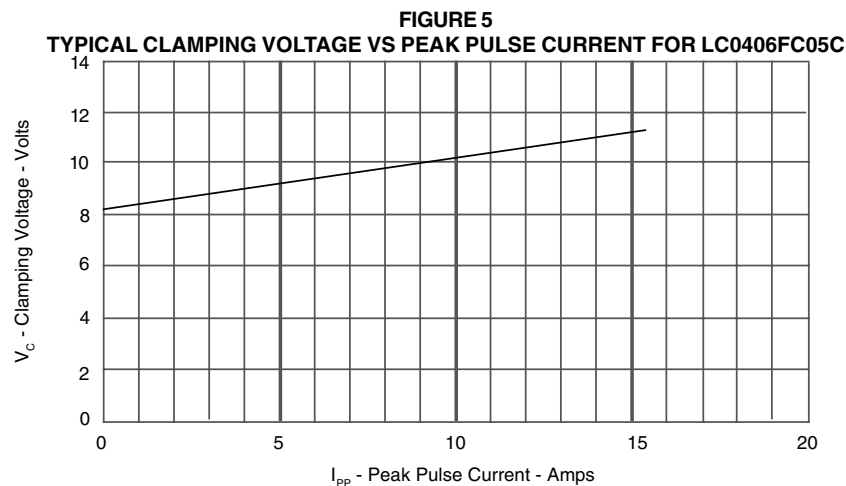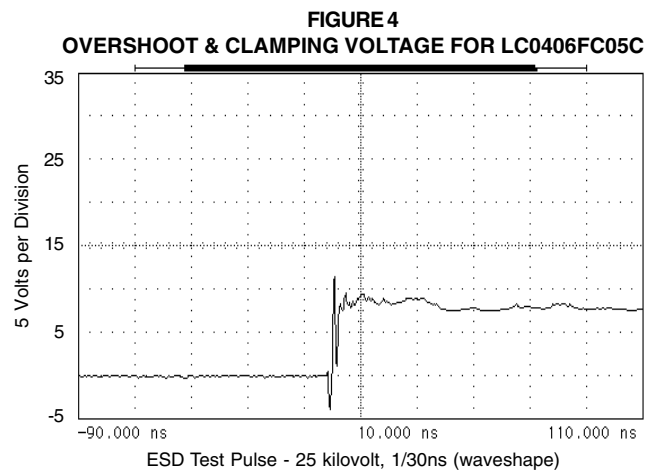

GRAPHS


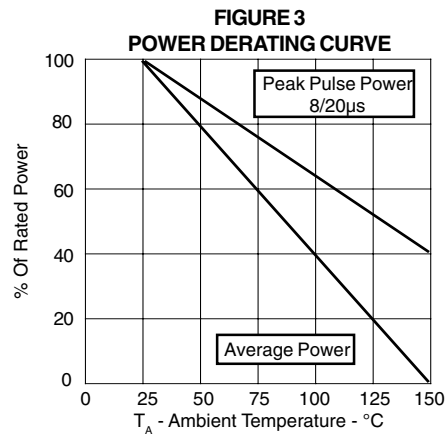


APPLICATION INFORMATION

PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	VALUE
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP (Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	$\pm 50\mu\text{m}$
Solder Ball Side Coplanarity	$\pm 20\mu\text{m}$
Maximum Dwell Time Above Liquidous (183°C)	60 Seconds
Soldering Maximum Temperature	270°C


REQUIREMENTS
Temperature: T_P for Lead-Free (SnAgCu): 260-270°C T_P for Tin-Lead: 240-245°C Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area & plating.

RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

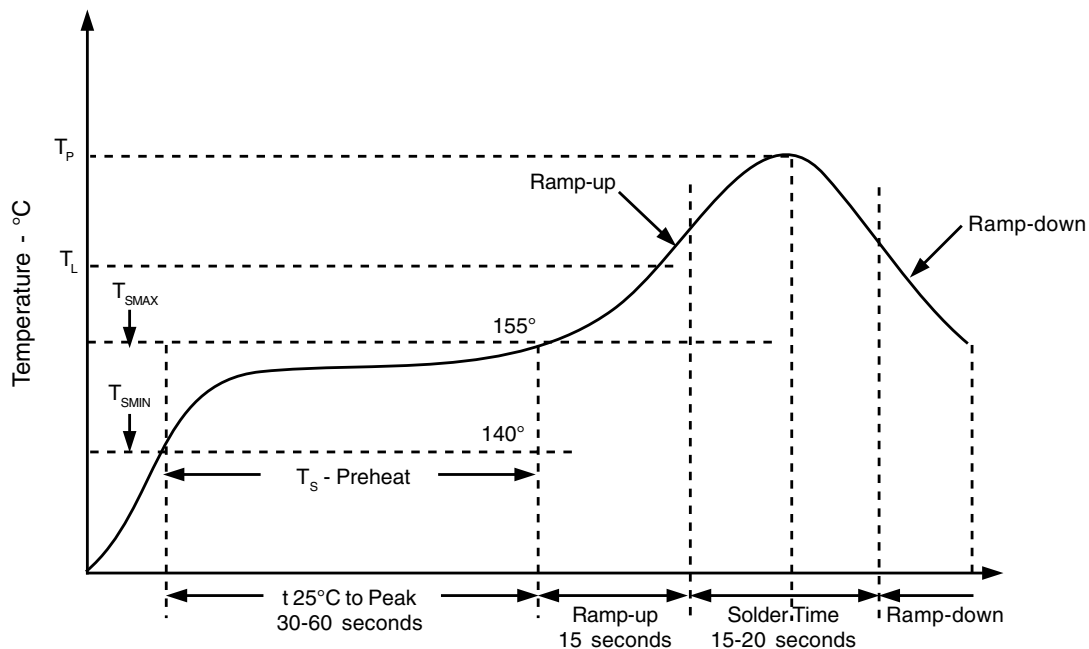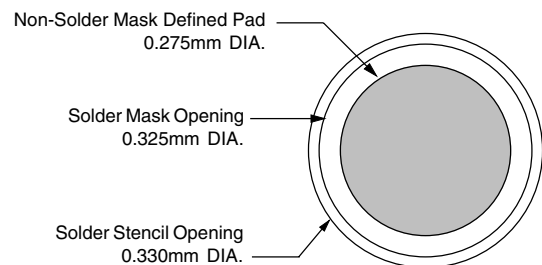

0406 PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE

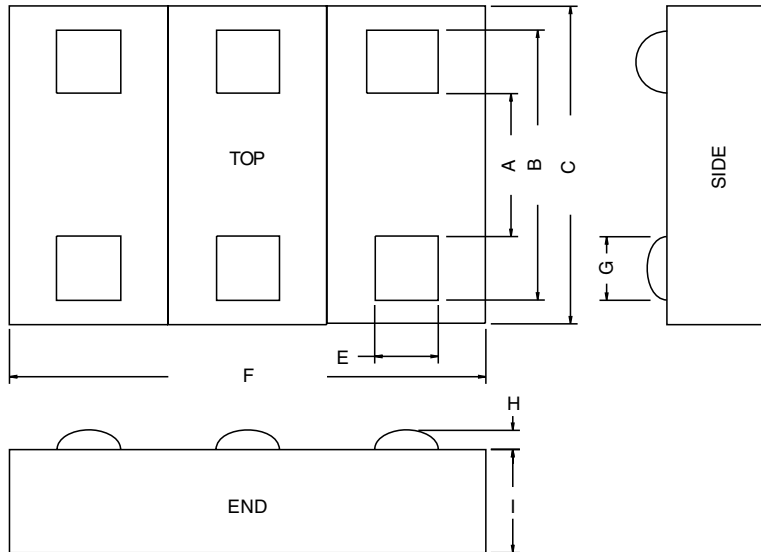


PACKAGE DIMENSIONS

DIM	MILLIMETERS	INCHES
A	0.56 NOM	0.022 NOM
B	0.86 NOM	0.034 NOM
C	0.99 ± 0.0254	0.039 ± 0.001
E	0.15 SQ	0.006 SQ
F	1.5 ± 0.0254	0.059 ± 0.001
G	0.15 NOM	0.006 NOM
H	0.127 MAX	0.005 MAX
I	0.076 MIN	0.003 MIN
I	0.406 NOM	0.016 NOM

NOTES:

- Controlling dimensions in inches.
- Decimal tolerances for mounting pad and outline: .xxx $\pm$ 0.05mm ($\pm$ 0.002").

MOUNTING PAD LAYOUT - Option 1

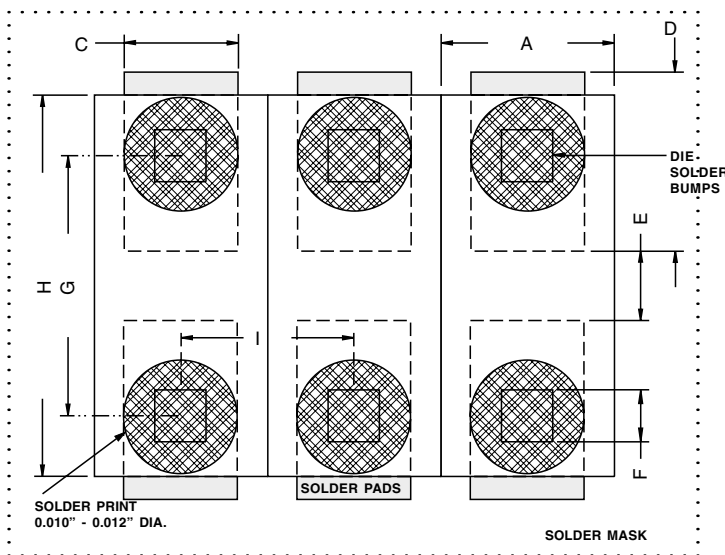

PAD DIMENSIONS


DIM	MILLIMETERS	INCHES
A	0.51	0.020
C	0.30	0.012
D	0.46	0.018
E	0.20	0.008
F	0.15 SQ	0.006 SQ
G	0.71	0.028
H	0.99	0.039
I	0.51	0.020

NOTE:

- Preferred: Using 0.1mm (0.004") stencil.

0406 PACKAGE OUTLINE & DIMENSIONS

MOUNTING PAD LAYOUT - Option 2

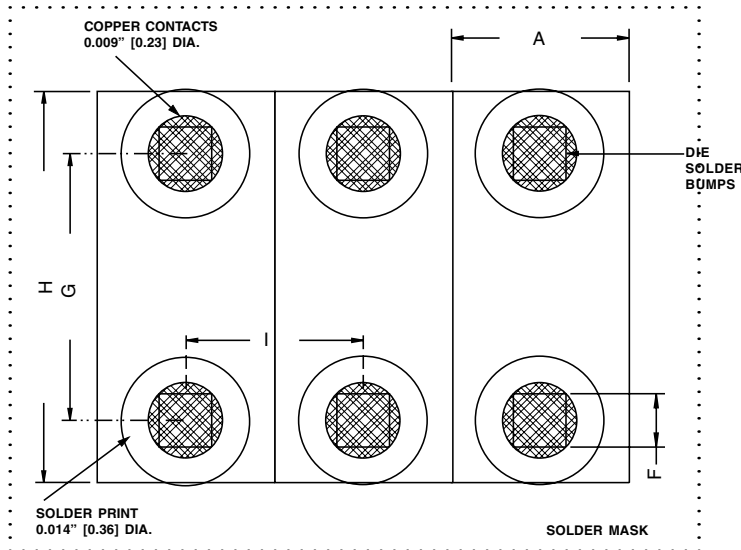


PACKAGE DIMENSIONS

DIM	MILLIMETERS	INCHES
A	0.51	0.020
F	0.15 SQ	0.006 SQ
G	0.71	0.028
H	0.99	0.039
I	0.51	0.020

NOTES:

- Controlling dimensions in inches.
- Decimal tolerances for mounting pad and outline: .xxx ± 0.05mm (± 0.002").
- Preferred: Using 0.1mm (0.004") stencil.

TAPE & REEL ORIENTATION



NOTE:

- Top view of tape. Solder bumps are face down in tape package.

TAPE & REEL ORDERING NOMENCLATURE

- Surface mount product is taped and reeled in accordance with EIA 481.
- 8mm Plastic Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1, i.e., LC0406FC05C-T75-1.
- 8mm Paper Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-2, i.e., LC0406FC05C-T75-2.
- Suffix - LF = Lead-Free, i.e., LC0406FC05C-LF-T75-1.

Outline & Dimensions: Rev 3 - 11/02, 06023