





TE5® / No. 396
 查询"3960050044"供应商

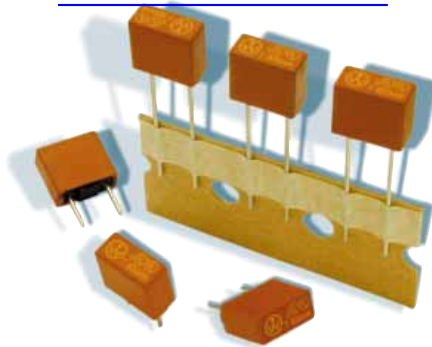

Dimensions (mm)

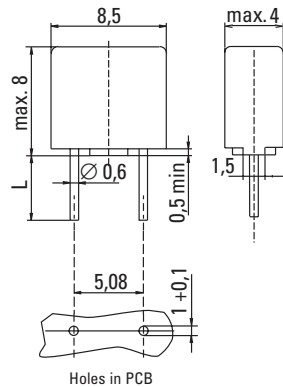

Long Leads (L=18.8mm)
 Short Leads (L=4.3mm)

Limits for Pre-arcing Time

Rated Current	$2.0 \times I_{\text{Rated}}$
50mA ... 6.30A	< 60s



UL 248-14, 125V, T

Time-Current Characteristic

Time Lag (T)

Standard

UL 248-14
 CSA C22.2 No. 248.14

Approvals

UL Listed: File No. E 67006
 cUL Listed: File No. E 67006
 MITI: File No. 32-1410

Features

Reduced PCB space requirements
 Direct solderable or plug-in versions
 Internationally approved
 Low internal resistance
 Shocksafe casing
 Vibration resistant

WebLinks

Data Sheet

www.wickmann.com/products/396.pdf

Approval Certificates

www.wickmann.com/approvals

Time-Current Curve

Page 59
www.wickmann.com/itcurves

Packaging

Page 118
www.wickmann.com/pack

FaxBack Document # 302

Specifications

Packaging

000: Tape/Ammopack (1400 pcs.)
 044: Short Leads - Bulk (1400 pcs.)

Materials

Base/Cap: Brown Thermoplastic
 Polyamide PA 6.6, UL 94V0
 Round Pins: Copper alloy, tin plated

Operating Temperature

-40°C to +85°C (consider de-rating)

Climatic Category

-25°C/+70°C/21 days (IEC 60068-2-1..3)

Stock Conditions

+10°C to +60°C
 relative humidity ≤ 75% yearly average,
 without dew, maximum value for 30 days - 95%

Vibration Resistance

24 cycles at 15 min. each (IEC 60068-2-6)
 10 - 60Hz at 0.75mm amplitude
 60 - 2000Hz at 10g acceleration

Lead Pull Strength

10N (IEC 60068-2-21)

Solderability

260°C, ≤ 3 sec. (Wave)
 350°C, ≤ 1 sec. (Hand)

Soldering Heat Resistance

260°C, 10 sec. (IEC 60068-2-20)

Marking

W, T, Current Rating, Approvals

Unit Weight

0.60g (approx.)

Permissible continuous operating current is ≤ 70% at ambient temperature of 23°C (73.4°F).

Rated Current	Amp Code	Voltage ¹ Rating	Breaking Capacity	Voltage Drop $1.0 \times I_{\text{Rated}}$ max. (mV)	Power Dissipation $1.0 \times I_{\text{Rated}}$ max. (mW)	Melting Integral $10 \times I_{\text{Rated}}$ min. (A²s)	Approvals
							ULcULMITI
50mA	0050	125V		900	45	0.0056	• •
63mA	0063	125V		800	50	0.009	• •
80mA	0080	125V		700	55	0.014	• •
100mA	0100	125V		600	60	0.025	• •
125mA	0125	125V		550	70	0.044	• •
160mA	0160	125V		480	80	0.058	• •
200mA	0200	125V		390	80	0.1	• •
250mA	0250	125V		350	90	0.17	• •
315mA	0315	125V		300	95	0.26	• •
400mA	0400	125V	100A / 125VAC	250	100	0.32	• •
500mA	0500	125V	50-60Hz	220	110	0.58	• •
630mA	0630	125V	cos φ = 1.0	210	135	0.75	• •
800mA	0800	125V		160	130	0.98	• •
1.00A	1100	125V		155	155	2.8	• •
1.25A	1125	125V		145	185	3.8	• •
1.60A	1160	125V		130	210	5.2	• •
2.00A	1200	125V		125	250	7.5	• •
2.50A	1250	125V		120	300	14	• •
3.15A	1315	125V		110	350	22	• •
4.00A	1400	125V		110	400	27	• •
5.00A	1500	125V		95	475	59	• •
6.30A	1630	125V		95	570	100	• •


¹ Contact WICKMANN for alternative version rated at 250V, Series No. 392.

Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		396		

[查询"3960050044"供应商](#)

TE5® / No. 396

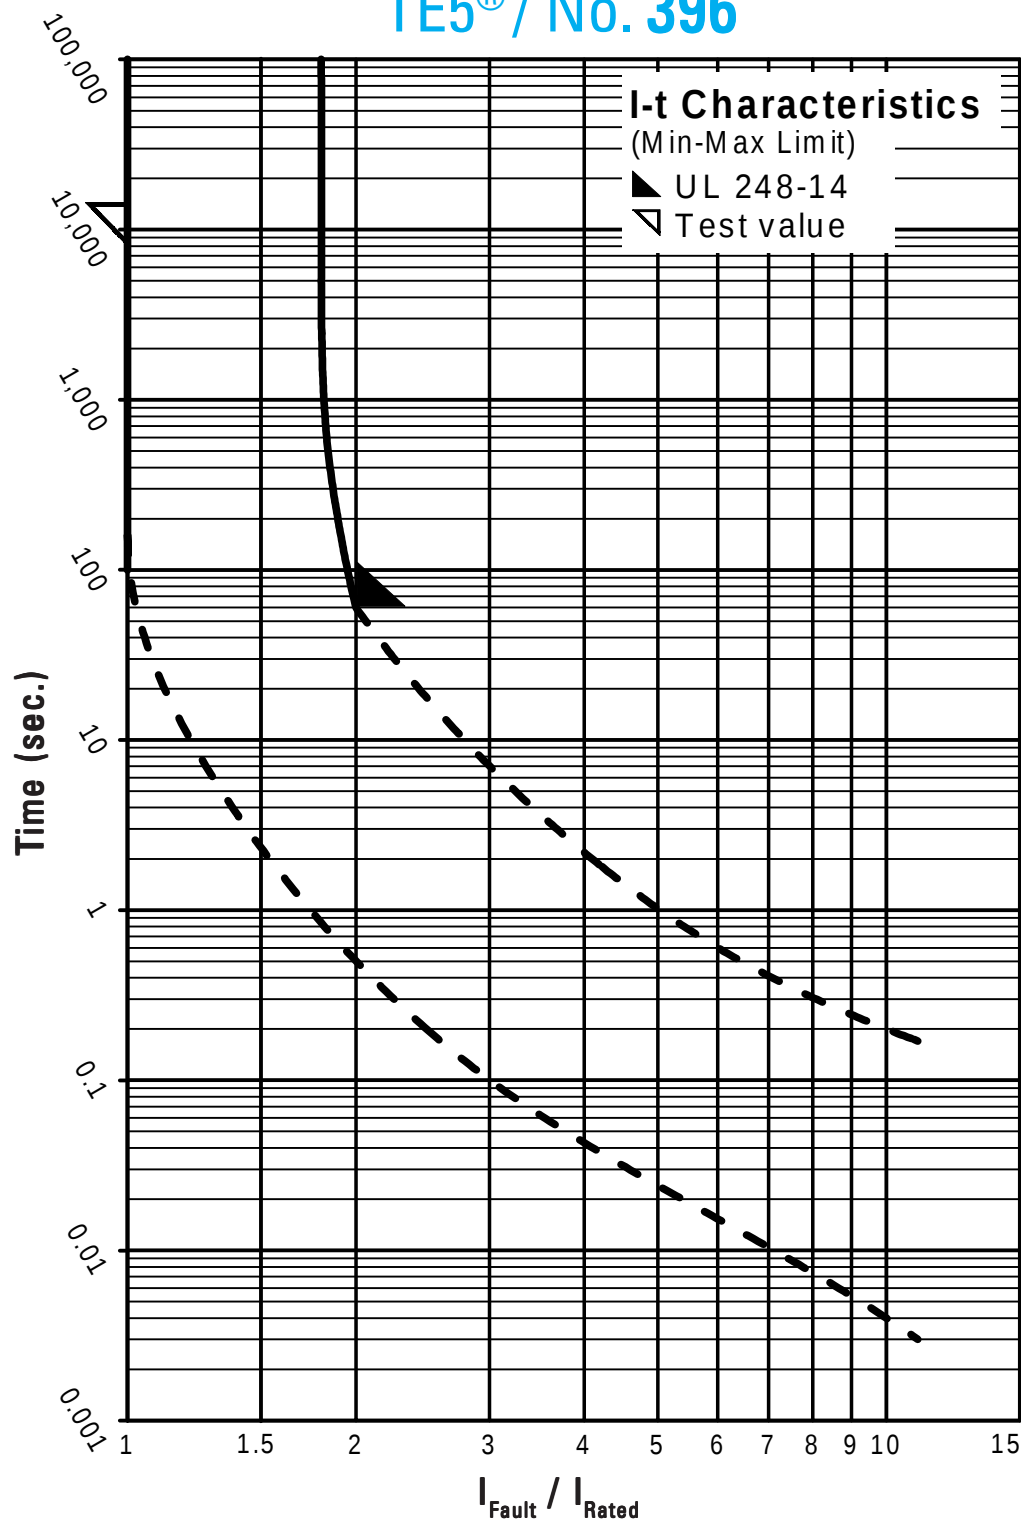

Contact WICKMANN for individual I-t curves