


[查询"CT30F-100K-M"供应商](#)

High Current Power Toroids

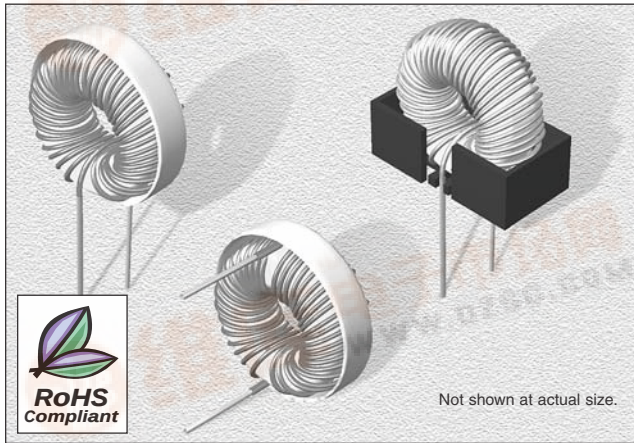

CHARACTERISTICS

Description: Vertical or Horizontal toroid inductor

Applications: EMI/RFI filter and heavy duty applications

Operating Temperature: -20°C to +80°C

Inductance Tolerance: ±10%, ±15% & ±20%

Inductance Ranges: 0.5 µH to 10.0 µH

Testing: Tested on an HP4284A at 1.0 kHz

Packaging: Bulk pack

Material: Iron powder or ferrite cores

Current Capabilities: 0.5 A to 10.0 A

Optional Tape: UL glass tape

Styles: Vertical, Horizontal & Klip Mount

How to order CT Toroids:

Vertical Mount w/ Tape: CT30-100K-TV

Horizontal Mount w/ Tape: CT30-100K-TH

Toroid w/ Base: CTB30-100K

Vertical or Horizontal Toroids w/ no Tape: Only add V or H

Miscellaneous: RoHS Compliant. Detailed specification sheets are available upon request

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

SPECIFICATIONS


Parts are marked to indicate tolerance available.
K = ±10%, L = ±15%, M = ±20%

Part Number	Inductance (µH)	L Test Freq. (kHz)	Rated DC (A)	Dia. (mm)	Width (mm)	Wire (AWG)	Optional Klip Mount
CT30F-100K-__	10	1.0	2.5	10.5	5.5	24	KM-1
CT44F-100K-__	10	1.0	3.0	14.2	8.5	20	KM-2
CT44F-121K-__	120	1.0	1.1	14.2	7.5	23	KM-2
CT44F-102K-__	1000	1.0	.50	14.2	6.0	30	KM-2
CT50F-5R0K-__	5.0	1.0	5.0	15.2	7.6	18	KM-3
CT50F-100K-__	10	1.0	3.0	16.5	8.5	18	KM-3
CT50F-250K-__	25	1.0	2.5	13.5	6.5	23	KM-2
CT50F-101K-__	100	1.0	2.0	15.5	8.5	22	KM-3
CT50F-251K-__	250	1.0	1.0	16.0	8.0	24	KM-2
CT50F-102K-__	1000	1.0	1.0	16.5	9.0	26	KM-3
CT60F-331K-__	330	1.0	2.5	19.0	9.5	24	KM-3
CT67F-250K-__	25	1.0	5.5	22.0	11.0	18	KM-3
CT67F-500K-__	50	1.0	5.0	21.0	13.0	18	KM-3
CT67F-101K-__	100	1.0	2.5	20.0	8.5	23	KM-3
CT68F-100K-__	10	1.0	6.0	20.8	8.2	18	KM-4
CT68F-250K-__	25	1.0	5.0	21.0	8.2	18	KM-4
CT68F-500K-__	50	1.0	3.0	22.0	10.0	19	KM-4
CT72F-251K-__	250	1.0	1.0	21.5	9.0	21	KM-4
CT77F-501K-__	500	1.0	2.0	23.7	11.0	22	KM-4
CT80F-250K-__	25	1.0	6.0	28.0	9.5	16	KM-4
CT80F-101K-__	100	1.0	5.0	25.0	12.0	18	KM-4
CT80F-251K-__	250	1.0	3.0	25.0	12.0	20	KM-5
CT80F-961K-__	960	1.0	1.0	24.0	11.0	25	KM-5
CT80F-822M-__	8200	1.0	1.0	24.0	12.0	20	KM-5
CT94F-100M-__	10	1.0	5.0	27.9	12.7	17	KM-5
CT94F-251K-__	250	1.0	5.0	29.0	13.0	18	KM-5
CT94F-501K-__	500	1.0	6.0	29.0	15.5	18	KM-5
CT94F-751K-__	750	1.0	4.5	30.5	12.7	19	KM-5
CT94F-102K-__	1000	1.0	4.0	29.2	15.0	20	KM-5
CT106F-500K-__	50	1.0	7.0	33.0	16.0	15	KM-5
CT106F-101K-__	100	1.0	5.0	33.5	17.5	16	KM-5
CT106F-201K-__	200	1.0	3.0	32.0	14.0	22	-
CT106F-471K-__	470	1.0	6.0	35.0	21.0	16	-
CT130F-121K-__	120	1.0	10.0	42.0	21.0	12	-
CT130F-251M-__	250	1.0	8.0	40.0	20.0	14	-
CT130F-561M-__	560	1.0	5.0	36.8	22.2	18	-
CT141F-100K-__	10	1.0	10.0	44.0	18.0	12	-


This is a representation of some of the more common toroid series types we produce. For values or sizes not shown ask for a specific requirement.

[查询"CT30E-100K-M"供应商](#)


High Current Power Toroids

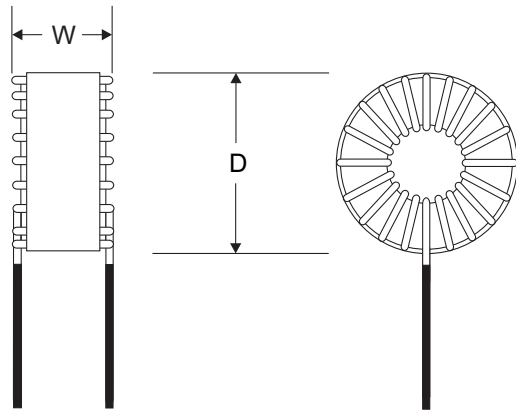

Vertical Toroid (taped)

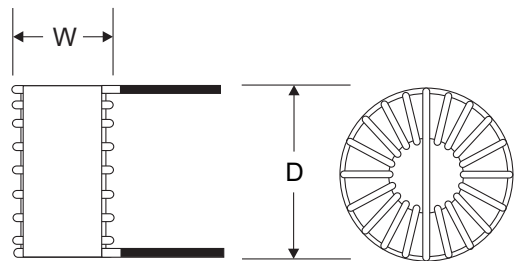


Horizontal Toroid (taped)

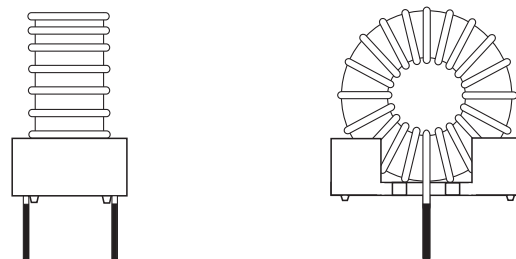

Klip Mount Toroid
*See klip mount size chart

PHYSICAL DIMENSIONS

Klip Mount #	Length	Width	AWG Sizes
KM-1	14.7	8.6	21-24
KM-2	16.5	11.4	18-24
KM-3	21.0	11.4	18-24
KM-4	24.1	15.2	17-22
KM-5	31.7	17.7	17-22

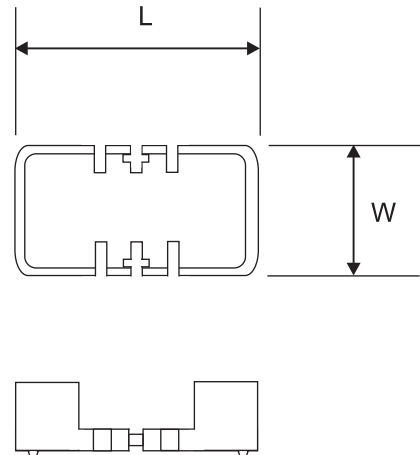

← Use images to left.

Series Number

Minimum
(mm)

Maximum
(mm)

CT30F	9.80 D / 5.50 W	10.5 D / 5.50 W
CT44F	14.0 D / 6.00 W	14.7 D / 8.50 W
CT50F	14.0 D / 6.50 W	17.0 D / 10.5 W
CT60F	18.0 D / 8.50 W	21.0 D / 11.4 W
CT67F	20.0 D / 8.50 W	22.0 D / 13.0 W
CT68F	20.8 D / 8.20 W	22.0 D / 10.0 W
CT72F	19.0 D / 7.20 W	21.6 D / 11.0 W
CT77F	23.7 D / 10.5 W	30.0 D / 12.7 W
CT80F	23.0 D / 10.0 W	30.0 D / 14.0 W
CT94F	27.5 D / 12.7 W	31.7 D / 15.8W
CT106F	31.0 D / 13.0 W	35.5 D / 17.7 W
CT130F	36.0 D / 14.5 W	42.0 D / 22.2 W
CT141F	43.5 D / 17.0 W	47.0 D / 23.0 W

05.10.07