


查询"4065-32K768"供应商.

569-914



AEL
CRYSTALS LIMITED



CYLINDRICAL QUARTZ CRYSTALS

FEATURES

- Small Size
- Extensive UK Stocks
- High Shock Resistance
- Good Stability

APPLICATIONS

- Time Keeping
- Ultra-Sonic remote Control
- Consumer Electronics
- Automotive Electronics

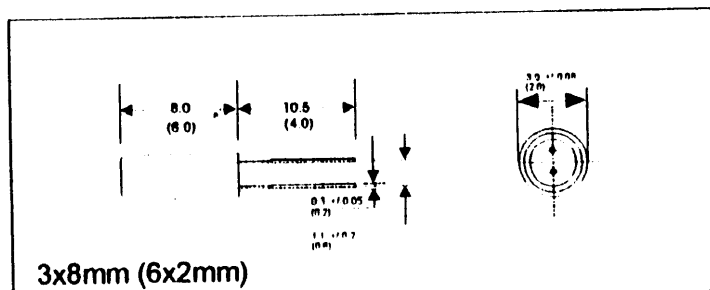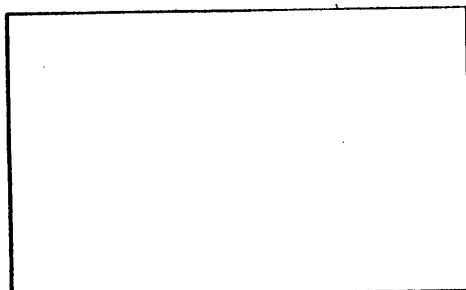

SPECIFICATION

AEL Crystals Ltd, in common with most crystal manufacturers have adopted the standard short code method of specifying crystal resonators.

e.g. 32.768 kHz 3x8 20/50/-10+60/30pF

Frequency
(6 Decimal Places)

Holder Style

Adjustment Tolerance at 25°C


Frequency Stability over O.T.R

Operating Temp. Range (O.T.R)


Load Capacity

Other important parameters such as overtone modes or ESR will be noted in addition to the above where they are non-typical.

TEST CIRCUIT

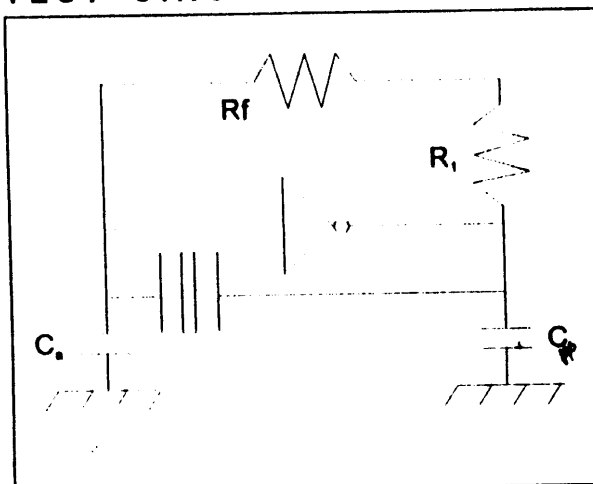

FREQUENCY CHARACTERISTICS

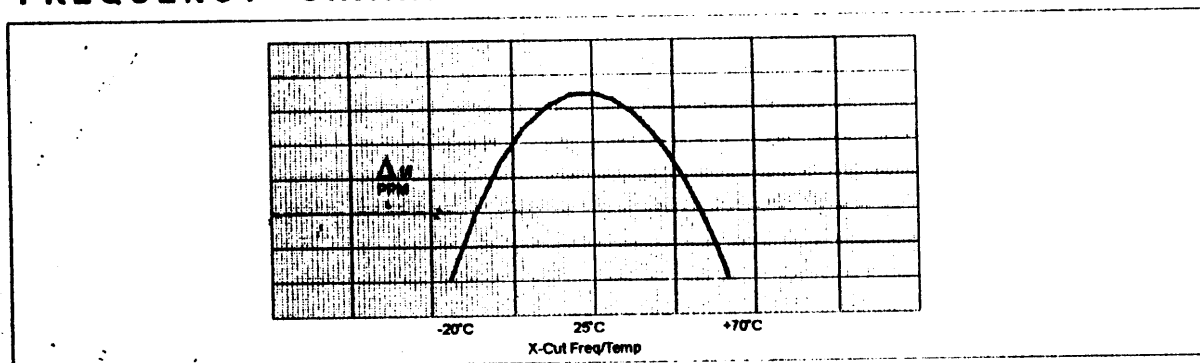

AEL CRYSTALS LIMITED

TEL: 0293 524245 FAX: 0293 524888