

LSQ SERIES

85°C Standard, Screw Terminal Type

◆ FEATURES

- Load Life : 85°C 3000 hours.
- RoHS compliance.



◆ SPECIFICATIONS

[illegible]

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient


(Hz) Frequency		60(50)	120	400	1k	10k $\leq$
Coefficient	10~50WV	0.80	1.00	1.03	1.05	1.08
	63~100WV	0.80	1.00	1.05	1.07	1.10
	160~450WV	0.80	1.00	1.10	1.13	1.18

◆PART NUMBER

□□□ Rated Voltage	LSQ Series	□□□□□ Rated Capacitance	□ Capacitance Tolerance	□□□ Option	D×L Case Size
---	----------------------------------	---	---	----------------------------------	-------------------------------------

DIMENSIONS

(mm)

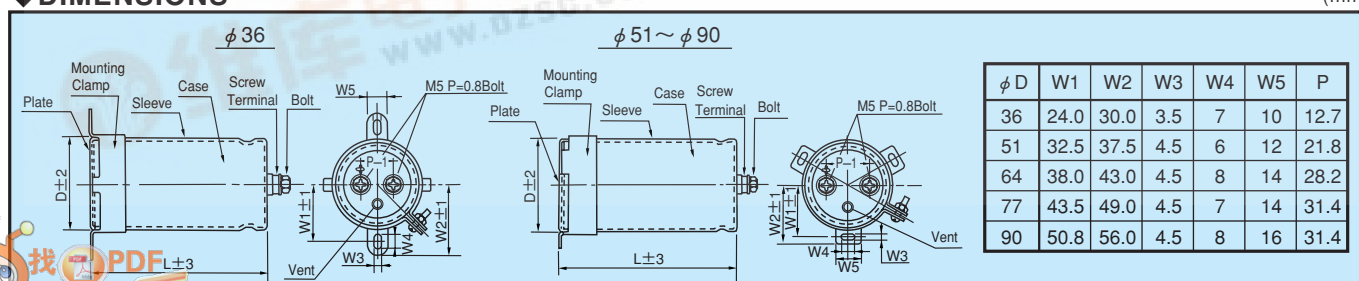

※Please notice the following conditions for use.

- (1) Maximum screw terminal tightening torque; 33kg/Ǝcm or less.
- (2) Maximum ripple current shall be 50Arms or less because of the rated current of M5 screw terminal.

◆STANDARD SIZE, RATED RIPPLE CURRENT

WV Cap(μF)	10V	16V	25V	35V	50V	63V	80V
3300							36×50 2.5
3900							36×50 2.6
4700							36×50 2.8
5600						36×50 3.0	36×63 2.9
6800					36×50 3.3	36×50 3.2	36×83 3.7
8200					36×50 3.7	36×63 3.8	36×83 4.2
10000				36×50 3.6	36×50 4.3	36×83 4.1	36×98 5.0
12000				36×50 3.7	36×63 5.3	36×83 4.4	36×118 5.4
15000				36×50 4.0	36×83 5.5	36×98 5.5	51×83 7.7
18000			36×50 5.0	36×63 4.7	36×83 5.7	36×118 6.2	51×83 7.8
22000			36×63 5.4	36×83 5.6	36×98 6.1	51×83 7.1	51×83 8.0
27000		36×50 5.1	36×83 5.8	36×83 6.2	36×118 6.7	51×83 7.4	51×98 8.7
33000		36×63 5.5	36×83 6.0	36×83 6.3	51×83 7.1	51×98 8.8	51×118 10.5
39000	36×50 5.3	36×83 7.0	36×83 6.7	36×98 7.6	51×83 7.4	51×118 10.0	64×99 12.1
47000	36×63 6.0	36×83 7.3	36×98 8.0	36×118 8.7	51×98 8.7	64×99 11.9	64×99 14.4
56000	36×83 6.3	36×98 7.6	36×118 8.4	51×83 10.0	51×98 9.8	64×99 12.6	64×119 15.0
68000	36×83 7.9	36×98 10.3	51×83 9.3	51×83 10.8	51×118 12.0	64×119 15.0	64×139 16.8
82000	36×83 8.4	36×118 10.5	51×83 10.0	51×98 12.0	64×99 12.3	77×101 16.4	77×121 19.4
100000	36×118 9.3	51×83 10.9	51×98 12.0	51×118 13.6	64×119 14.2	77×121 18.9	77×141 21.5
120000	51×83 10.0	51×98 11.1	51×118 12.9	64×99 13.8	64×119 16.0	77×141 21.6	90×141 22.3
150000	51×83 11.0	51×98 12.6	64×99 15.3	64×99 14.6	77×121 18.6	90×141 26.0	
180000	51×98 12.1	51×118 13.2	64×99 15.5	64×119 16.7	77×141 19.5		
220000	51×98 14.0	64×99 14.7	64×119 18.0	77×101 17.4	90×141 23.3		
270000	51×118 14.2	64×119 15.4	77×101 18.8	77×141 23.1	90×141 24.8		
330000	64×99 17.3	64×139 18.3	77×121 23.2	77×151 25.9			
390000	64×119 18.0	77×121 19.0	77×141 23.5	90×141 26.5			
470000	64×139 19.3	77×141 22.0	90×141 24.7	90×151 28.3			
560000	77×121 20.1	77×151 23.0	90×141 26.2				
680000	77×141 24.0						

WV Cap(μF)	100V	160V	200V	250V	350V	400V	450V
270						36×50 1.3	36×50 1.6
330						36×50 1.7	36×63 1.8
390					36×50 1.9	36×63 1.8	36×83 2.2
470				36×50 1.6	36×63 2.1	36×83 2.3	36×83 2.4
560				36×50 1.6	36×83 2.4	36×83 2.7	36×98 2.8
680			36×50 1.6	36×50 1.7	36×83 2.9	36×98 2.9	36×118 3.1
820			36×50 1.7	36×63 1.8	36×98 3.4	36×98 3.4	51×83 3.6
1000			36×63 2.2	36×83 2.4	36×98 3.8	36×118 3.9	51×83 4.0
1200		36×50 2.3	36×63 2.3	36×83 2.4	36×118 4.2	51×83 4.2	51×98 4.8
1500		36×63 3.2	36×83 2.9	36×98 3.1	51×83 4.7	51×98 4.8	51×118 5.7
1800		36×83 3.4	36×83 2.9	36×118 3.4	51×98 6.3	51×98 5.7	64×99 6.5
2200	36×50 2.5	36×83 3.6	36×98 3.6	51×83 3.9	51×98 6.4	51×118 7.0	64×99 7.2
2700	36×50 2.7	36×98 3.8	36×118 4.0	51×83 4.0	64×99 8.8	64×99 7.9	64×119 8.7
3300	36×50 3.2	36×118 4.7	51×83 4.6	51×98 5.4	64×99 8.8	64×119 9.5	77×121 10.5
3900	36×63 3.3	51×83 5.3	51×83 4.7	51×118 6.0	64×119 10.3	77×101 10.7	77×121 12.0
4700	36×83 3.5	51×83 5.6	51×98 7.1	64×99 7.3	77×101 12.0	77×121 12.8	77×141 13.3
5600	36×83 3.8	51×98 6.4	51×118 8.3	64×99 7.3	77×121 12.7	77×141 14.5	90×141 15.8
6800	36×98 4.5	51×98 7.5	64×99 9.5	64×119 8.9	77×141 16.0	77×151 17.5	90×151 18.7
8200	36×118 6.0	51×118 8.1	64×99 10.0	77×101 8.9	90×141 19.0	90×141 18.0	
10000	36×118 6.3	64×99 9.9	64×119 11.1	77×121 11.8	90×141 20.0	90×151 20.5	
12000	51×83 6.6	64×119 10.8	77×101 11.6	77×141 13.1			
15000	51×83 8.5	77×101 12.7	77×121 12.9	90×141 16.5			
18000	51×98 8.9	77×121 14.1	77×141 15.2				
22000	51×118 10.2	77×141 16.6	90×141 15.6				
27000	64×99 11.0	90×141 17.7					
33000	64×119 11.7	90×141 18.9					
39000	77×101 12.5						
47000	77×121 14.5						
56000	77×141 16.2						
68000	77×151 18.3						
82000	90×141 20.1						
100000	90×141 21.0						

↑ Ripple Current (A r.m.s./120Hz, 85℃)
Case Size ϕ D×L(mm)