

SMD Efficient Fast Recovery Rectifier

[查询"CEFA102-G"供应商](#)


COMCHIP
SMD DIODE SPECIALIST



CEFA101-G Thru CEFA105-G (RoHS Device)

Reverse Voltage: 50 ~ 600 Volts

Forward Current: 1.0 Amp




Features:

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0.
- Super fast recovery time for high efficient
- Built-in strain relief
- Low forward voltage drop

Mechanical Data:

- Case: JEDEC DO-214AC molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.063 gram

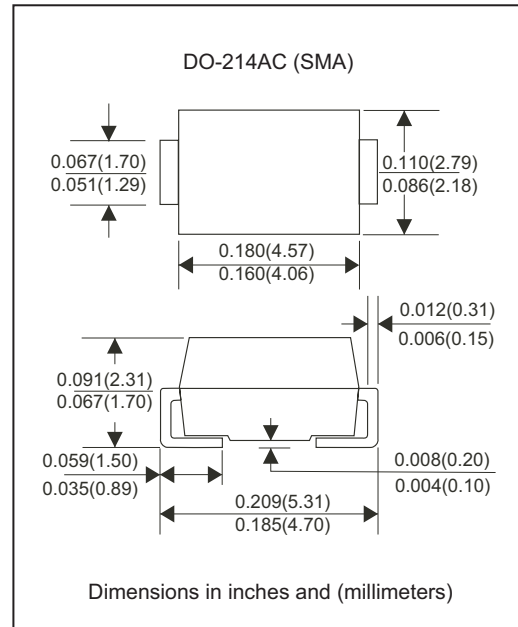

Maximum Ratings and Electrical Characteristics:

Parameter	Symbol	CEFA101-G	CEFA102-G	CEFA103-G	CEFA104-G	CEFA105-G	Unit
Max. Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	V
Max. DC Blocking Voltage	V_{DC}	50	100	200	400	600	V
Max. RMS Voltage	V_{RMS}	35	70	140	280	420	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}	30					A
Max. Average Forward Current	I_o	1.0					A
Max. Instantaneous Forward Voltage at 1.0A	V_F	0.92			1.25	1.3	V
Reverse recovery time	T_{rr}	25			35	50	nS
Max. DC Reverse Current at Rated DC Blocking Voltage $T_a=25^{\circ}C$ $T_a=100^{\circ}C$	I_R	5.0 200					μA
Max. Thermal Resistance (Note1)	$R_{\theta JL}$	25					$^{\circ}C/W$
Max. Operating Junction Temperature	T_j	150					$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150					$^{\circ}C$

Note1: Thermal resistance from junction to lead mounted on PCB with 8.0mmx8.0mm² copper pad areas.

“-G” suffix designates RoHS compliant Version



Rating and Characteristic Curves (CEFA101-G Thru CEFA105-G)

Fig. 1 - Reverse Characteristics

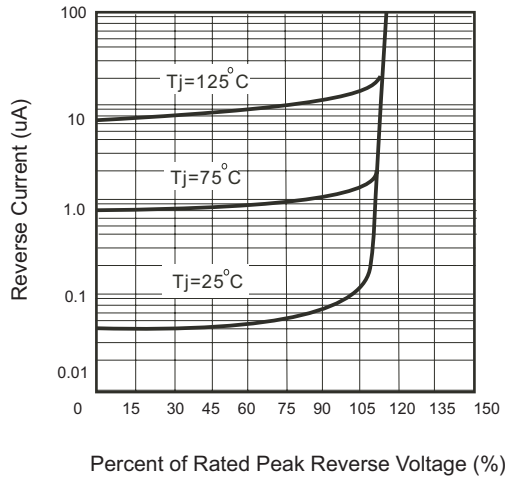


Fig.2 - Forward Characteristics

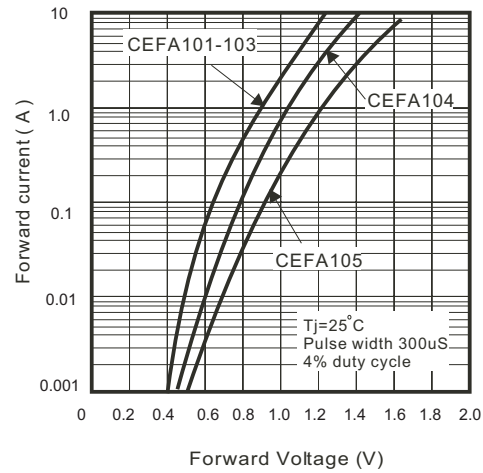


Fig. 3 - Junction Capacitance

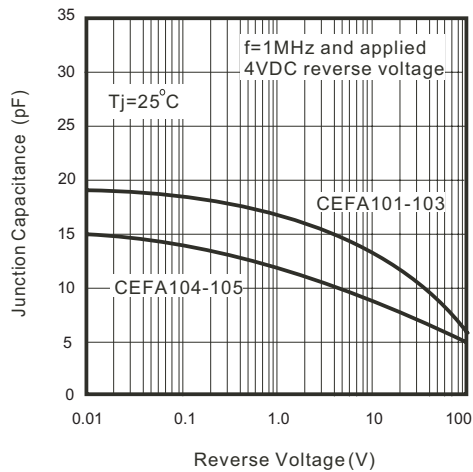


Fig. 4 - Non Repetitive Forward Surge Current

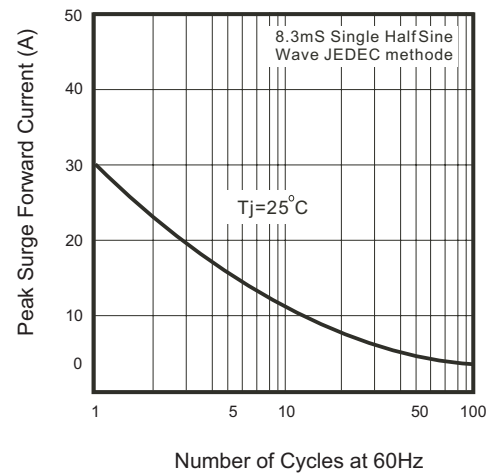


Fig 5 - Test Circuit Diagram and Reverse Recovery Time Characteristics


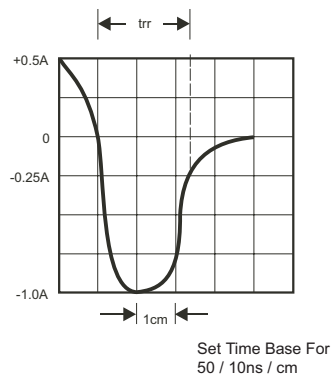


Fig. 6 - Current Derating Curve

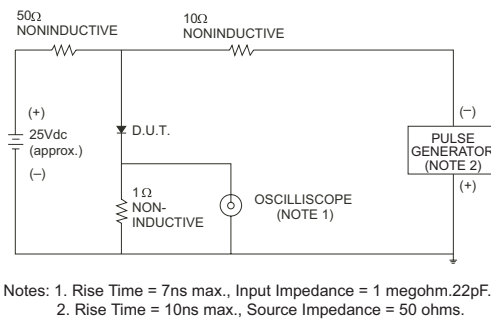