

BCcomponents

DATA SHEET

056/057 PSM-SI Aluminum electrolytic capacitors Power Standard Miniature Snap-in

Product specification
Supersedes data of 18th January 2000
File under BCcomponents, BC01

2000 Sep 18

BC COMPONENTS

Aluminum electrolytic capacitors
Power Standard Miniature Snap-in



056/057 PSM-SI

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, minimized dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Pressure relief on the top of the aluminum case
- Charge and discharge proof
- Long useful life: 12000 hours at 85 °C
- High ripple current capability; see Table 3 for ripple current optimized types, 385 V and 400 V
- Keyed polarity version available.

APPLICATIONS

- General purpose, industrial and audio/video systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems.

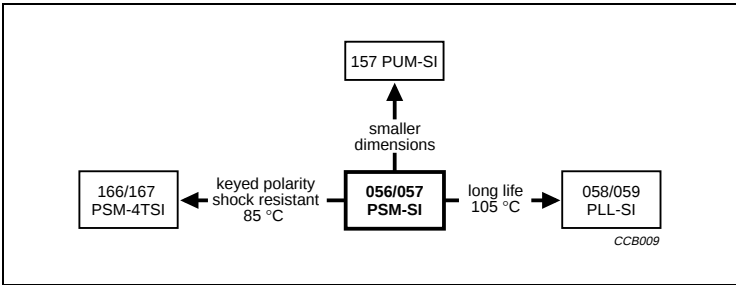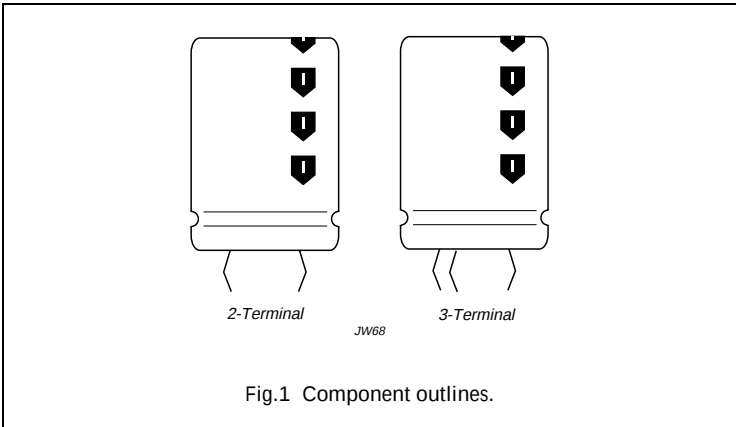

QUICK REFERENCE DATA

DESCRIPTION	VALUE	
	056	057
Case size ($\varnothing D_{nom} \times L_{nom}$ in mm)	22 × 25 to 35 × 50	
Rated capacitance range (E6 series), C_R	470 to 68000 μF	47 to 1500 μF
Tolerance on C_R	±20%	
Rated voltage range, U_R ; note 1	10 to 100 V	200 to 450 V
Category temperature range	−40 to +85 °C	
Endurance test at 85 °C	5000 hours (450 V: 2000 hours)	
Useful life at 85 °C	12000 hours (450 V: 5000 hours)	
Useful life at 40 °C and $1.4 \times I_R$ applied	210000 hours (450 V: 90000 hours)	
Shelf life at 0 V, 85 °C	500 hours	
Based on sectional specification	IEC 60384-4/EN130300	
Climatic category IEC 60068	40/085/56	

Note

1. A 420 V range is available on request.

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

Selection chart for C_R , U_R and relevant nominal case sizes ($\varnothing D \times L$ in mm) for 056 series

Preferred types (2-terminals) in **bold**.

C_R (μF)	U_R (V)						
	10	16	25	40	50	63	100
470	–	–	–	–	–	–	22 × 25
680	–	–	–	–	–	–	22 × 30
1000	–	–	–	–	–	22 × 25	25 × 30
	–	–	–	–	–	–	22 × 40
1500	–	–	–	–	22 × 25	22 × 30	30 × 30
	–	–	–	–	–	–	25 × 40
2200	–	–	–	22 × 25	22 × 30	25 × 30	30 × 40
	–	–	–	–	–	22 × 40	25 × 50
3300	–	–	22 × 25	22 × 30	25 × 30	30 × 30	35 × 40
	–	–	–	–	22 × 40	25 × 40	30 × 50
4700	–	22 × 25	22 × 30	25 × 30	30 × 30	30 × 40	35 × 50
	–	–	–	22 × 40	25 × 40	25 × 50	–
6800	22 × 25	22 × 30	25 × 30	30 × 30	30 × 40	35 × 40	–
	–	–	22 × 40	25 × 40	25 × 50	30 × 50	–
10000	22 × 30	25 × 30	30 × 30	30 × 40	35 × 40	35 × 50	–
	–	22 × 40	25 × 40	25 × 50	30 × 50	–	–
15000	25 × 30	30 × 30	30 × 40	35 × 40	35 × 50	–	–
	22 × 40	25 × 40	25 × 50	30 × 50	–	–	–
22000	30 × 30	30 × 40	35 × 40	35 × 50	–	–	–
	25 × 40	25 × 50	30 × 50	–	–	–	–
33000	30 × 40	35 × 40	35 × 50	–	–	–	–
	25 × 50	30 × 50	–	–	–	–	–
47000	35 × 40	35 × 50	–	–	–	–	–
	30 × 50	–	–	–	–	–	–
68000	35 × 50	–	–	–	–	–	–

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

Selection chart for C_R , U_R and relevant nominal case sizes ($\varnothing D \times L$ in mm) for 057 series

Preferred types (2-terminals) in **bold**.

C_R (μF)	U_R (V)				
	200	250	385	400	450
47	–	–	22 × 30 ⁽¹⁾	22 × 30 ⁽¹⁾	22 × 30
	–	–	22 × 25	22 × 25	–
68	–	–	25 × 30 ⁽¹⁾	25 × 30 ⁽¹⁾	22 × 30
	–	–	22 × 40 ⁽¹⁾	22 × 35 ⁽¹⁾	–
	–	–	22 × 35 ⁽¹⁾	22 × 30	–
	–	–	22 × 30	–	–
100	–	22 × 25	30 × 30 ⁽¹⁾	30 × 30 ⁽¹⁾	30 × 30
	–	–	25 × 40 ⁽¹⁾	25 × 40 ⁽¹⁾	–
	–	–	25 × 30	25 × 30	–
	–	–	22 × 40	22 × 35	–
	–	–	22 × 35	–	25 × 35
150	22 × 25	22 × 30	30 × 40 ⁽¹⁾	30 × 35 ⁽¹⁾	25 × 50
	–	–	30 × 35 ⁽¹⁾	30 × 30	–
	–	–	30 × 30	25 × 50 ⁽¹⁾	–
	–	–	25 × 50 ⁽¹⁾	25 × 40	–
	–	–	25 × 40	–	30 × 35
220	22 × 30	25 × 30	35 × 35 ⁽¹⁾	35 × 40 ⁽¹⁾	35 × 40
	–	22 × 40	30 × 45 ⁽¹⁾	30 × 50 ⁽¹⁾	30 × 45
	–	–	30 × 40	30 × 35	–
	–	–	30 × 35	25 × 50	–
	–	–	25 × 50	–	–
330	25 × 30	30 × 30	35 × 50 ⁽¹⁾	35 × 50 ⁽¹⁾	35 × 50
	22 × 40	25 × 40	35 × 45 ⁽¹⁾	35 × 40	35 × 45
	–	–	35 × 35	30 × 50	–
	–	–	30 × 45	–	–
470	30 × 30	30 × 40	35 × 50	35 × 50	–
	25 × 40	25 × 50	35 × 45	–	–
680	30 × 40	35 × 40	–	–	–
	25 × 50	30 × 50	–	–	–
1000	35 × 40	35 × 50	–	–	–
	30 × 50	–	–	–	–
1500	35 × 50	–	–	–	–

Note



1. Ripple current optimized types.

Aluminum electrolytic capacitors
Power Standard Miniature Snap-in



056/057 PSM-SI

MECHANICAL DATA AND PACKAGING QUANTITIES

Two terminal snap-in

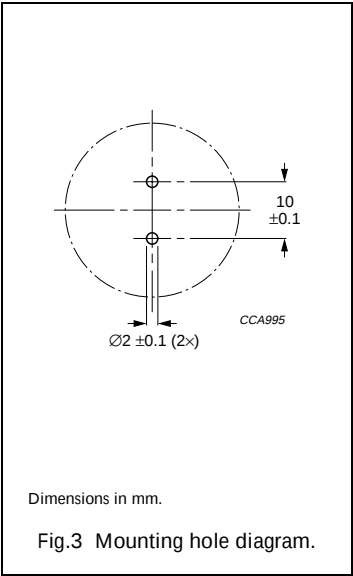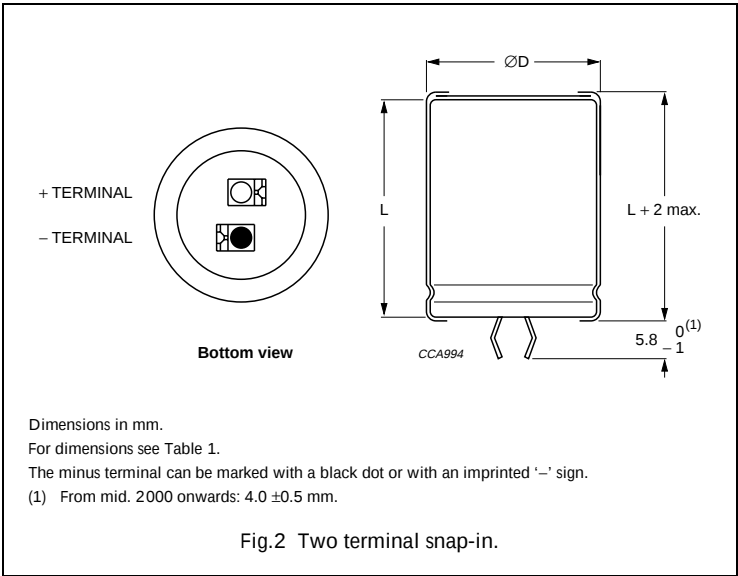

Three terminal snap-in

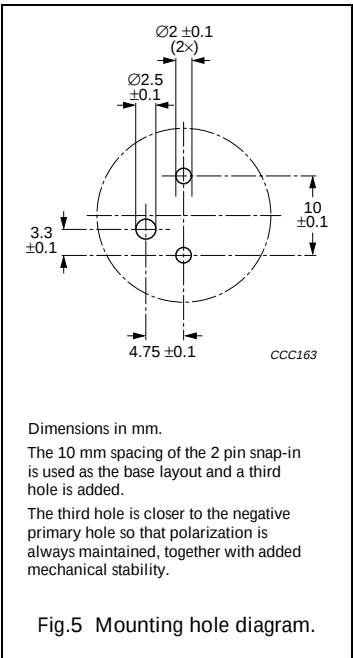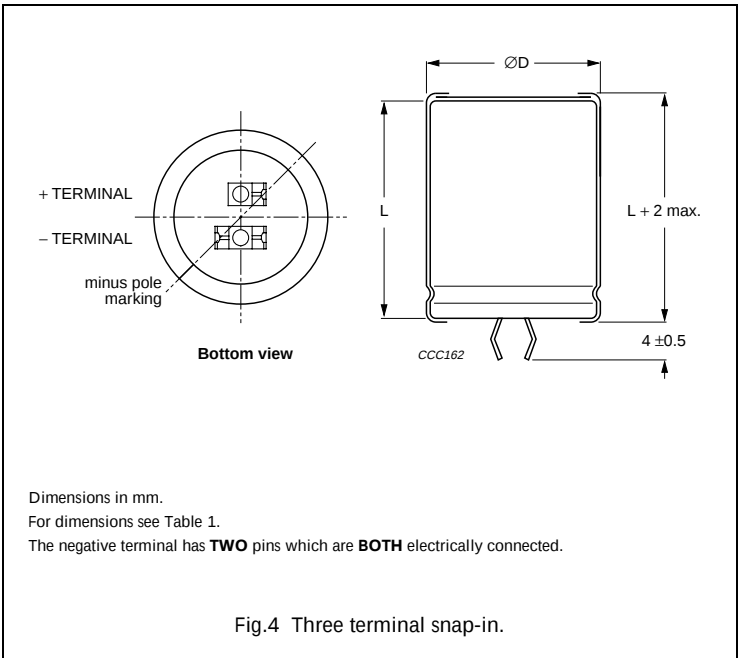

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI
Table 1 Physical dimensions, mass and packaging information; see Figs 2 and 4

NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	$\varnothing D_{\max}$ (mm)	$L_{\max}$ (mm)	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS $l \times w \times h$ (mm)
22 × 25	23	27	≈12	100	260 × 250 × 39
22 × 30	23	32	≈16	100	260 × 250 × 44
22 × 35	23	37	≈20	100	260 × 250 × 49
22 × 40	23	42	≈23	100	260 × 250 × 54
25 × 30	26	32	≈22	100	290 × 280 × 44
25 × 35	26	37	≈24	100	290 × 280 × 49
25 × 40	26	42	≈27	100	290 × 280 × 54
25 × 50	26	52	≈38	100	290 × 280 × 64
30 × 30	31	32	≈30	100	340 × 330 × 44
30 × 35	31	37	≈35	100	340 × 330 × 49
30 × 40	31	42	≈40	100	340 × 330 × 54
30 × 45	31	47	≈45	100	340 × 330 × 59
30 × 50	31	52	≈50	100	340 × 330 × 64
35 × 35	36	37	≈48	50	390 × 198 × 49
35 × 40	36	42	≈55	50	390 × 198 × 54
35 × 45	36	47	≈63	50	390 × 198 × 59
35 × 50	36	52	≈72	50	390 × 198 × 64

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Tolerance code on rated capacitance (M for $\pm 20\%$)
- Rated voltage (in V)
- Climatic category in accordance with "IEC 60068"
- Date code (year and week) in accordance with "IEC 60062"
- Code for factory of origin
- Name of manufacturer
- '–' sign to indicate the negative terminal, visible from the top and side of the capacitor
- Code number (last 8 digits)
- Code for basic specification in accordance with "IEC 60384-4-1" and "CECC 30301".

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

ELECTRICAL DATA AND ORDERING INFORMATION

Unless otherwise specified, all electrical values in Tables 2 and 3 apply at
T_{amb} = 20 °C, P = 86 to 106 kPa, RH = 45 to 75%.

SYMBOL	DESCRIPTION
C _R	rated capacitance at 100 Hz
I _R	rated RMS ripple current at 100 Hz or ≥10 kHz and 85 °C
I _{L1}	max. leakage current after 1 minute at U _R
I _{L5}	max. leakage current after 5 minutes at U _R
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 10 kHz

Ordering example

Electrolytic capacitor 056 series

10000 µF/25 V; ±20%

Nominal case size: Ø25 × 40 mm

2-TERMINAL SNAP-IN:

Catalogue number: 2222 056 46103.

3-TERMINAL SNAP-IN:

Catalogue number: 2222 056 26103.

Table 2 Electrical data and ordering information for **056** series; preferred types in **bold**

U _R (V)	C _R 100 Hz (µF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _R ≥10 kHz 85 °C (A)	I _{L1} 1 min (µA)	I _{L5} 5 min (µA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 056	
									2-TERM.	3-TERM.
10	6800	22 × 25	2.04	2.40	412	140	76	62	54682	74682
	10000	22 × 30	2.56	3.02	608	205	56	45	54103	74103
	15000	25 × 30	3.12	3.68	904	304	44	39	54153	74153
	15000	22 × 40	3.39	4.00	904	304	41	34	44153	24153
	22000	30 × 30	3.47	4.09	1324	444	44	37	54223	74223
	22000	25 × 40	4.12	4.86	1324	444	34	28	44223	24223
	33000	30 × 40	4.58	5.40	1984	664	32	28	54333	74333
	33000	25 × 50	4.70	5.55	1984	664	30	27	44333	24333
	47000	35 × 40	5.10	6.02	2824	944	31	26	54473	74473
	47000	30 × 50	5.39	6.36	2824	944	28	24	44473	24473
16	68000	35 × 50	5.88	6.94	4084	1364	28	23	54683	74683
	4700	22 × 25	2.01	2.37	455	154	79	62	55472	75472
	6800	22 × 30	2.54	3.00	657	222	57	45	55682	75682
	10000	25 × 30	3.02	3.56	964	324	47	39	55103	75103
	10000	22 × 40	3.28	3.87	964	324	44	34	45103	25103
	15000	30 × 30	3.36	3.96	1444	484	47	37	55153	75153
	15000	25 × 40	4.00	4.72	1444	484	34	28	45153	25153
	22000	30 × 40	4.51	5.32	2116	708	33	28	55223	75223
	22000	25 × 50	3.97	4.68	2116	708	42	41	45223	25223
	33000	35 × 40	5.02	5.92	3172	1060	32	28	55333	75333
	33000	30 × 50	4.75	5.61	3172	1060	36	34	45333	25333
	47000	35 × 50	5.34	6.30	4516	1508	34	32	55473	75473

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _R ≥10 kHz 85 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 056	
									2-TERM.	3-TERM.
25	3300	22 × 25	1.88	2.22	499	169	89	61	56332	76332
	4700	22 × 30	2.37	2.80	709	239	65	45	56472	76472
	6800	25 × 30	2.81	3.32	1024	344	54	41	56682	76682
	6800	22 × 40	3.16	3.73	1024	344	47	38	46682	26682
	10000	30 × 30	3.25	3.84	1504	504	50	38	56103	76103
	10000	25 × 40	3.73	4.40	1504	504	39	30	46103	26103
	15000	30 × 40	4.73	5.58	2254	754	30	28	56153	76153
	15000	25 × 50	3.92	4.63	2254	754	43	39	46153	26153
	22000	35 × 40	4.48	5.29	3304	1104	40	28	56223	76223
	22000	30 × 50	4.96	5.85	3304	1104	36	23	46223	26223
	33000	35 × 50	4.98	5.88	4954	1654	39	33	56333	76333
40	2200	22 × 25	1.85	2.26	532	180	92	61	57222	77222
	3300	22 × 30	2.09	2.55	796	260	67	45	57332	77332
	4700	25 × 30	2.28	2.78	1132	380	82	70	57472	77472
	4700	22 × 40	3.10	3.78	1132	380	49	38	47472	27472
	6800	30 × 30	3.16	3.85	1636	548	53	38	57682	77682
	6800	25 × 40	3.06	3.73	1636	548	58	50	47682	27682
	10000	30 × 40	4.20	5.12	2404	804	38	28	57103	77103
	10000	25 × 50	3.88	4.73	2404	804	44	39	47103	27103
	15000	35 × 40	4.05	4.94	3604	1204	49	41	57153	77153
	15000	30 × 50	4.45	5.43	3604	1204	41	34	47153	27153
	22000	35 × 50	4.86	5.93	5284	1764	40	33	57223	77223
50	1500	22 × 25	1.36	1.66	454	154	170	130	51152	71152
	2200	22 × 30	1.75	2.14	664	224	120	91	51222	71222
	3300	25 × 30	2.17	2.65	994	334	90	72	51332	71332
	3300	22 × 40	2.42	2.95	994	334	80	63	41332	21332
	4700	30 × 30	2.65	3.23	1414	474	75	63	51472	71472
	4700	25 × 40	2.89	3.53	1414	474	65	52	41472	21472
	6800	30 × 40	3.56	4.34	2044	684	53	45	51682	71682
	6800	25 × 50	3.75	4.58	2044	684	50	43	41682	21682
	10000	35 × 40	4.05	4.94	3004	1004	49	42	51103	71103
	10000	30 × 50	4.50	5.49	3004	1004	40	35	41103	21103
	15000	35 × 50	4.98	6.08	4504	1504	39	33	51153	71153

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _R ≥10 kHz 85 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 056	
									2-TERM.	3-TERM.
63	1000	22 × 25	1.46	1.78	382	130	148	104	58102	78102
	1500	22 × 30	1.87	2.28	571	193	105	72	58152	78152
	2200	25 × 30	2.32	2.83	836	281	79	59	58222	78222
	2200	22 × 40	2.54	3.10	836	281	73	53	48222	28222
	3300	30 × 30	2.87	3.50	1251	420	64	50	58332	78332
	3300	25 × 40	3.14	3.83	1251	420	55	44	48332	28332
	4700	30 × 40	3.67	4.48	1780	596	50	38	58472	78472
	4700	25 × 50	3.71	4.53	1780	596	48	38	48472	28472
	6800	35 × 40	4.33	5.28	2574	861	43	38	58682	78682
	6800	30 × 50	4.75	5.80	2574	861	42	37	48682	28682
	10000	35 × 50	5.26	6.42	3784	1264	35	30	58103	78103
100	470	22 × 25	0.77	0.94	286	98	535	470	59471	79471
	680	22 × 30	0.99	1.21	412	160	375	328	59681	79681
	1000	25 × 30	1.27	1.55	604	204	265	235	59102	79102
	1000	22 × 40	1.35	1.65	604	204	260	225	49102	29102
	1500	30 × 30	1.67	2.04	904	304	190	170	59152	79152
	1500	25 × 40	1.75	2.14	904	304	180	160	49152	29152
	2200	30 × 40	2.27	2.77	1324	444	130	120	59222	79222
	2200	25 × 50	2.30	2.80	1324	444	125	110	49222	29222
	3300	35 × 40	2.84	3.46	1984	664	100	95	59332	79332
	3300	30 × 50	2.97	3.62	1984	664	92	85	49332	29332
	4700	35 × 50	3.59	4.38	2824	677	75	70	59472	79472

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI
Table 3 Electrical data and ordering information for **057** series; preferred types in **bold**

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 057	
								2-TERM.	3-TERM.
200	150	22 × 25	0.77	184	64	950	620	52151	72151
	220	22 × 30	1.00	268	92	650	435	52221	72221
	330	25 × 30	1.36	400	136	430	310	52331	72331
	330	22 × 40	1.36	400	136	430	310	42331	22331
	470	30 × 30	1.80	568	192	310	230	52471	72471
	470	25 × 40	1.80	568	192	310	230	42471	22471
	680	30 × 40	2.39	820	276	210	180	52681	72681
	680	25 × 50	2.39	820	276	210	180	42681	22681
	1000	35 × 40	2.85	1204	404	160	135	52102	72102
	1000	30 × 50	2.85	1204	404	160	135	42102	22102
	1500	35 × 50	3.66	1804	604	120	105	52152	72152
250	100	22 × 25	0.63	154	54	1440	770	53101	73101
	150	22 × 30	0.83	229	79	960	520	53151	73151
	220	25 × 30	1.10	334	114	660	365	53221	73221
	220	22 × 40	1.10	334	114	660	365	43221	23221
	330	30 × 30	1.49	499	169	440	265	53331	73331
	330	25 × 40	1.49	499	169	440	265	43331	23331
	470	30 × 40	1.98	709	239	310	185	53471	73471
	470	25 × 50	1.98	709	239	310	185	43471	23471
	680	35 × 40	2.60	1024	344	240	145	53681	73681
	680	30 × 50	2.60	1024	344	240	145	43681	23681
	1000	35 × 50	3.12	1504	504	160	105	53102	73102
385	47	22 × 30	0.59	112	40	3000	1400	18479 ⁽¹⁾	28479 ⁽¹⁾
	47	22 × 25	0.50	112	40	3000	1400	58479	78479
	68	25 × 30	0.82	161	56	2100	1100	78689 ⁽¹⁾	88689 ⁽¹⁾
	68	22 × 40	0.81	161	56	2100	1100	28689 ⁽¹⁾	38689 ⁽¹⁾
	68	22 × 35	0.79	161	56	2100	1100	18689 ⁽¹⁾	48689 ⁽¹⁾
	68	22 × 30	0.63	161	56	2100	1000	58689	68689
	100	30 × 30	1.13	235	81	1400	750	28101 ⁽¹⁾	93001 ⁽¹⁾
	100	25 × 40	1.13	235	81	1400	750	18101 ⁽¹⁾	93002 ⁽¹⁾
	100	25 × 30	0.86	235	81	1400	780	58101	78101
	100	22 × 40	0.86	235	81	1400	780	48101	68101
	100	22 × 35	0.84	235	81	1400	780	38101	88101
	150	30 × 40	1.54	350	119	1000	500	38151 ⁽¹⁾	93003 ⁽¹⁾
	150	30 × 35	1.41	350	119	1000	500	28151 ⁽¹⁾	88151 ⁽¹⁾
	150	30 × 30	1.16	350	119	950	520	58151	78151
	150	25 × 50	1.48	350	119	1000	500	18151 ⁽¹⁾	93004 ⁽¹⁾

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 057	
								2-TERM.	3-TERM.
385	150	25 × 40	1.16	350	119	950	520	48151	68151
	220	35 × 35	1.61	512	173	700	460	28221 ⁽¹⁾	93005 ⁽¹⁾
	220	30 × 45	1.63	512	173	700	460	18221 ⁽¹⁾	88221 ⁽¹⁾
	220	30 × 40	1.57	512	173	650	400	58221	78221
	220	30 × 35	1.50	512	173	650	400	38221	90051
	220	25 × 50	1.57	512	173	650	400	48221	68221
	330	35 × 50	2.31	766	258	450	280	28331 ⁽¹⁾	93006 ⁽¹⁾
	330	35 × 45	2.20	766	258	450	280	18331 ⁽¹⁾	93007 ⁽¹⁾
	330	35 × 35	1.73	766	258	480	280	68331	88331
	330	30 × 45	1.75	766	258	480	280	38331	78331
	470	35 × 50	2.40	1089	366	340	220	58471	78471
	470	35 × 45	2.29	1089	366	340	220	48471	28471
400	47	22 × 30	0.59	117	42	3000	1400	16479 ⁽¹⁾	26479 ⁽¹⁾
	47	22 × 25	0.50	117	42	3000	1400	56479	76479
	68	25 × 30	0.82	167	58	2100	1100	26689 ⁽¹⁾	66689 ⁽¹⁾
	68	22 × 35	0.79	167	58	2100	1100	16689 ⁽¹⁾	86689 ⁽¹⁾
	68	22 × 30	0.63	167	58	2100	1000	56689	76689
	100	30 × 30	1.13	244	84	1400	750	26101 ⁽¹⁾	86101 ⁽¹⁾
	100	25 × 40	1.13	244	84	1400	750	16101 ⁽¹⁾	93008 ⁽¹⁾
	100	25 × 30	0.86	244	84	1400	780	56101	76101
	100	22 × 35	0.84	240	84	1400	780	36101	66101
	150	30 × 35	1.41	364	124	1000	520	26151 ⁽¹⁾	66151 ⁽¹⁾
	150	30 × 30	1.16	364	124	950	520	56151	90054
	150	25 × 50	1.50	364	124	1000	520	16151 ⁽¹⁾	36151 ⁽¹⁾
	150	25 × 40	1.16	364	124	950	520	46151	86151
	220	35 × 40	1.74	532	180	700	460	26221 ⁽¹⁾	93009 ⁽¹⁾
	220	30 × 50	1.75	532	180	700	460	16221 ⁽¹⁾	76221 ⁽¹⁾
	220	30 × 35	1.50	532	180	650	400	36221	90055
	220	25 × 50	1.57	532	180	650	400	46221	86221
	330	35 × 50	2.31	796	268	450	300	16331 ⁽¹⁾	86331 ⁽¹⁾
	330	35 × 40	1.85	796	268	480	280	56331	76331
	330	30 × 50	1.85	796	268	480	280	46331	26331
	470	35 × 50	2.40	1132	380	340	220	56471	76471

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 057	
								2-TERM.	3-TERM.
450	47	22 × 30	0.26	131	45	5600	4400	67479	87479
	68	22 × 30	0.33	188	65	3900	3100	57689	77689
	100	30 × 30	0.48	274	94	2600	2100	57101	77101
	100	25 × 35	0.46	274	94	2600	2100	37101	17101
	150	30 × 35	0.66	409	140	1600	1300	37151	17151
	150	25 × 50	0.70	409	140	1600	1300	47151	27151
	220	35 × 40	0.92	598	202	1100	900	57221	77221
	220	30 × 45	0.73	598	202	1100	900	37221	17221
	330	35 × 50	1.26	895	301	700	600	57331	77331
	330	35 × 45	1.20	895	301	700	600	47331	27331

Note

1. Ripple current optimized types.



Additional electrical data

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	≤250 V versions	$U_s = 1.15 \times U_R$
	≥385 V versions	$U_s = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
Current		
Leakage current	after 1 minute at U _R	$I_{L1} \leq 0.006 C_R \times U_R + 4 \text{ μA}$
	after 5 minutes at U _R	$I_{L5} \leq 0.002 C_R \times U_R + 4 \text{ μA}$
Inductance		
Equivalent series inductance (ESL)	all case sizes	typ. 19 nH
		max. 25 nH

Aluminum electrolytic capacitors
Power Standard Miniature Snap-in

056/057 PSM-SI



Capacitance (C)

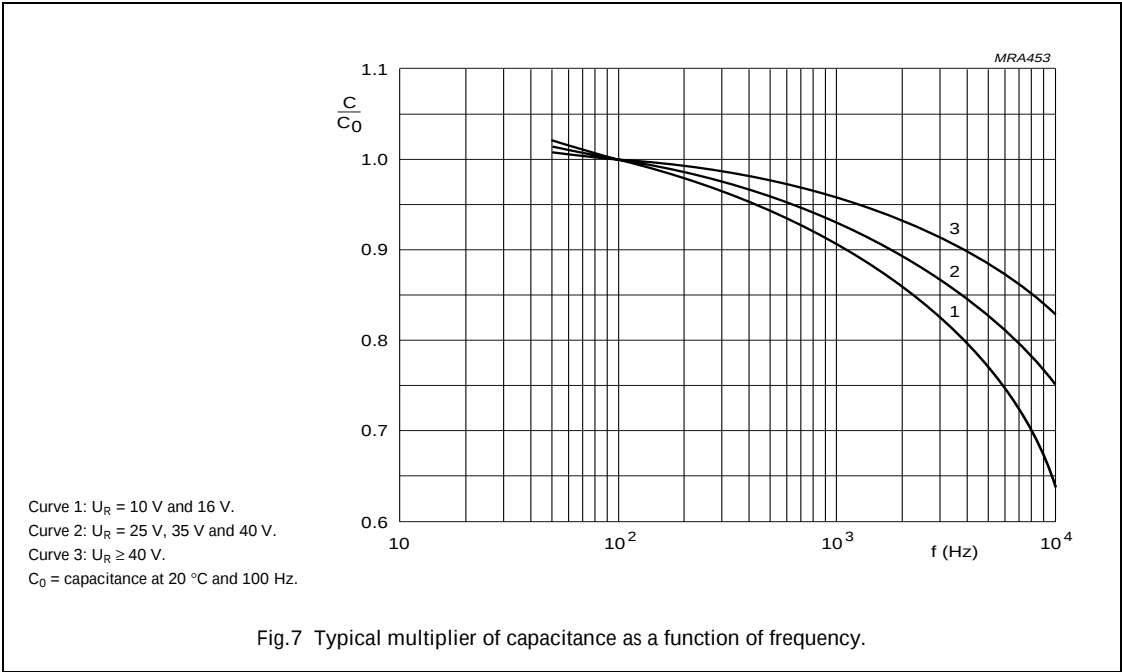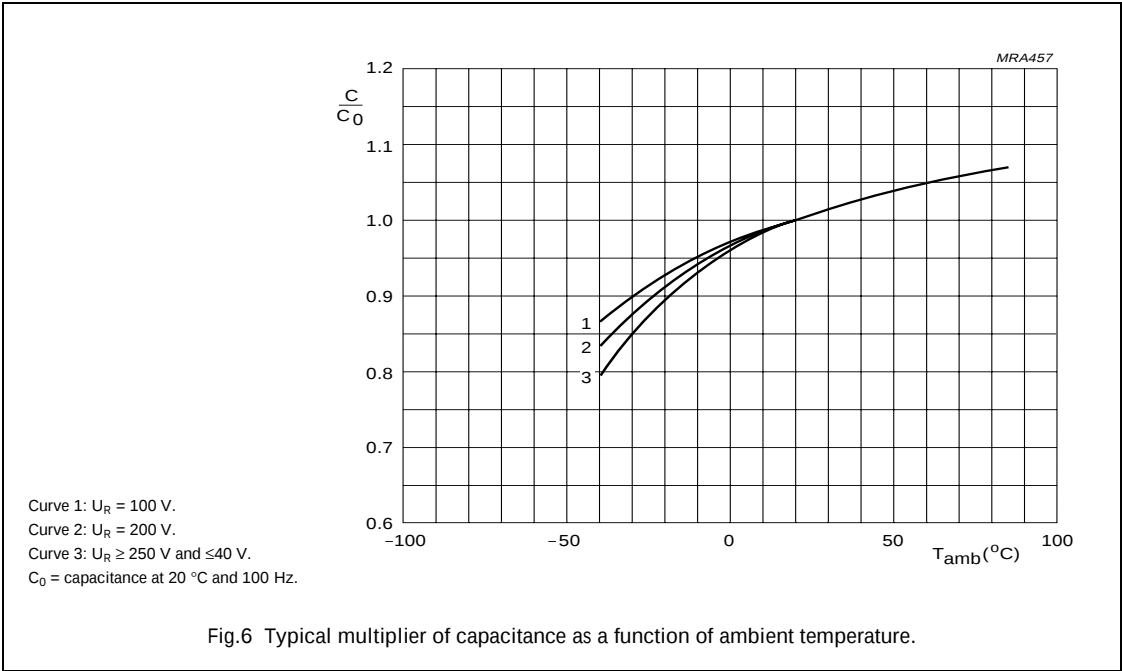

Aluminum electrolytic capacitors
Power Standard Miniature Snap-in

056/057 PSM-SI



Equivalent series resistance (ESR)

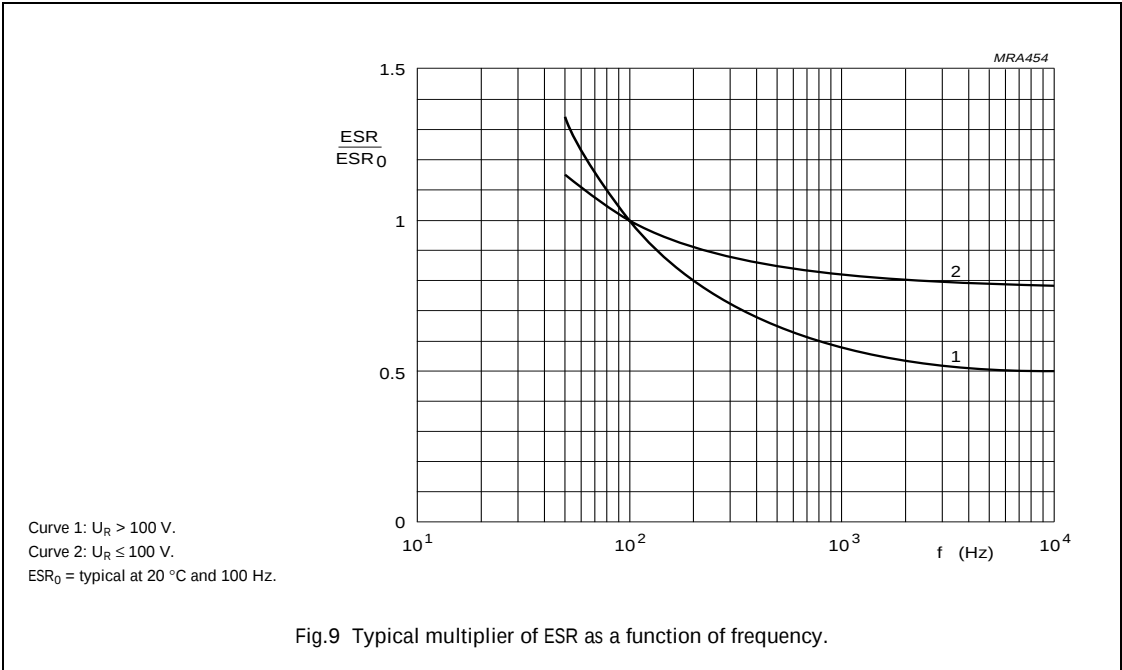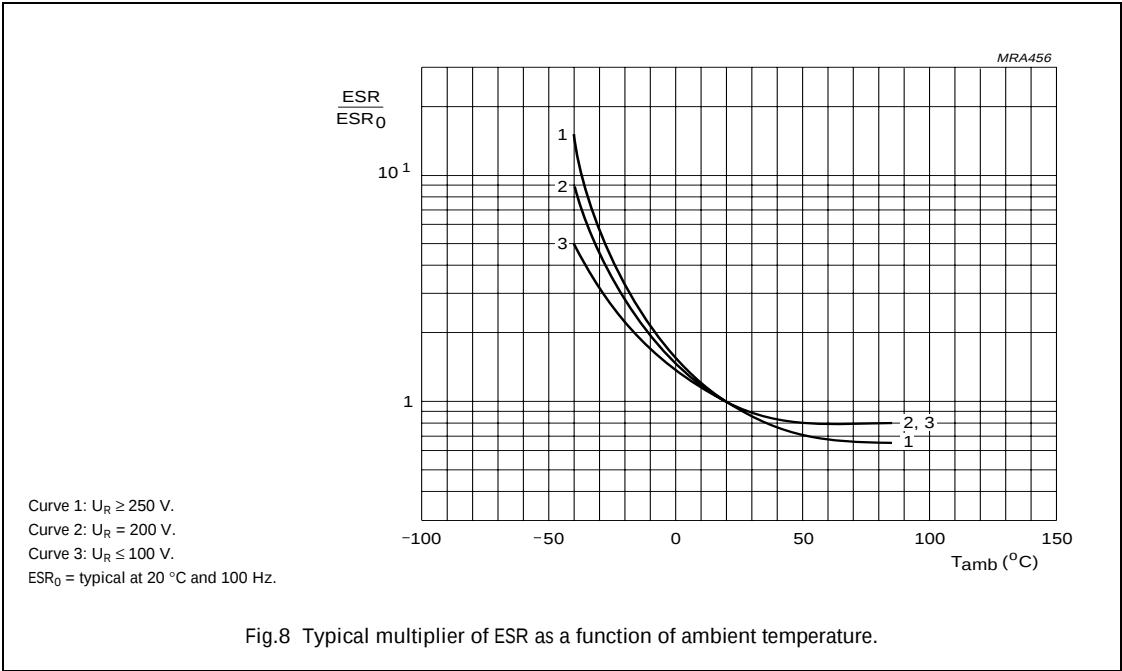

Aluminum electrolytic capacitors
Power Standard Miniature Snap-in



056/057 PSM-SI

Impedance (Z)

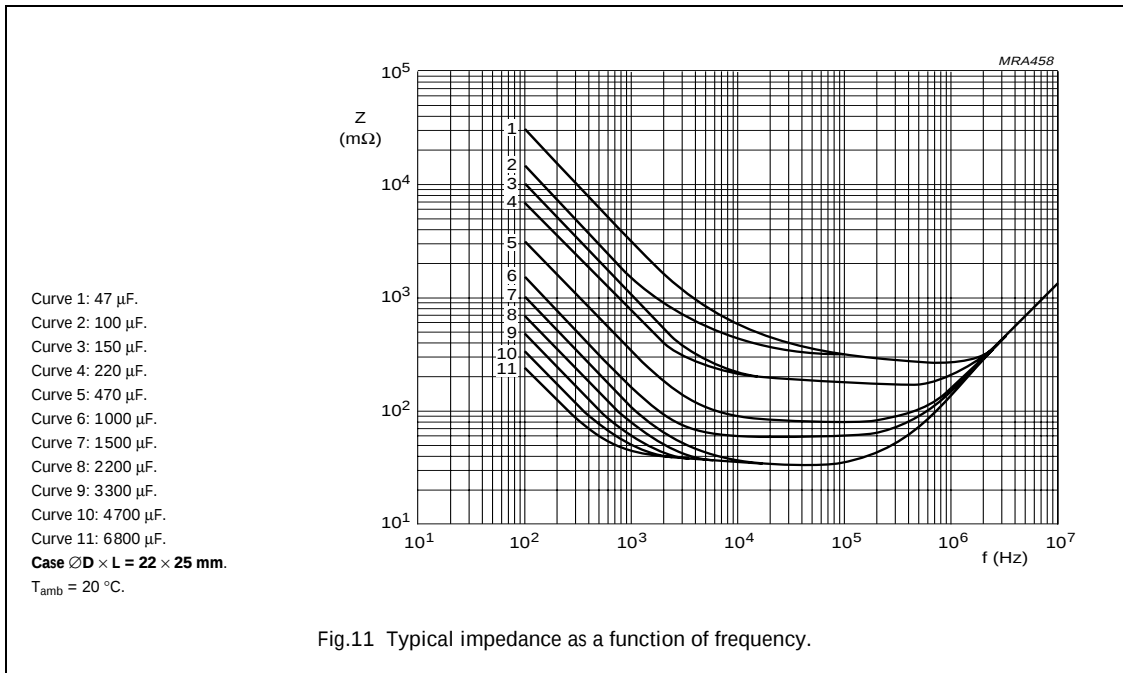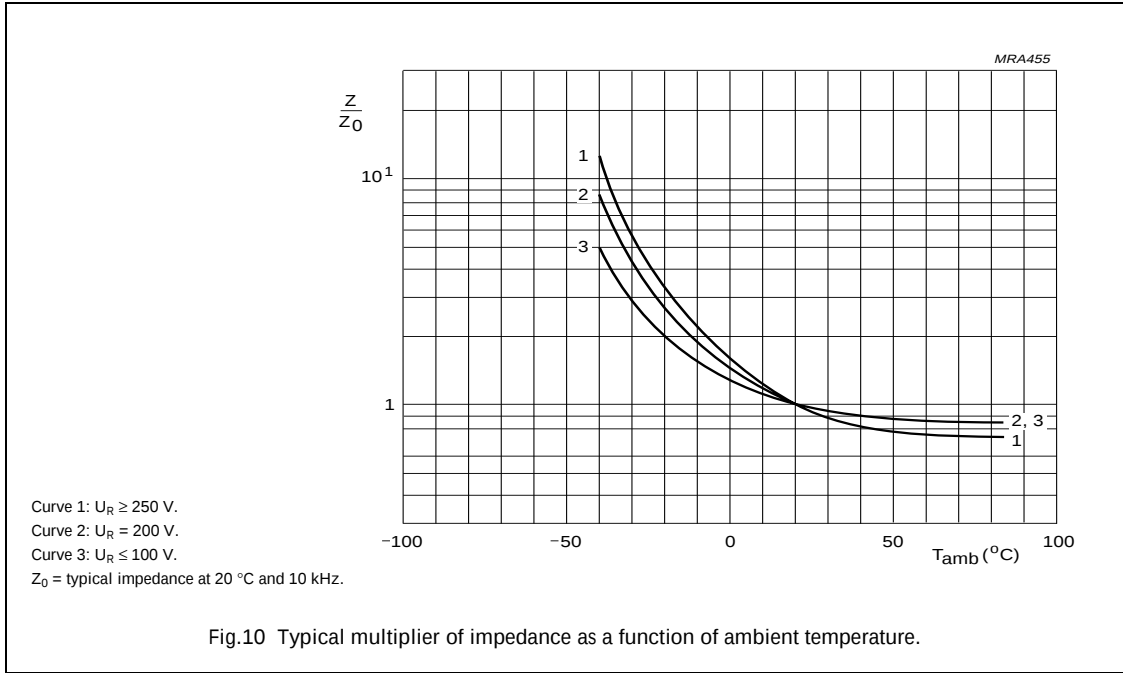

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

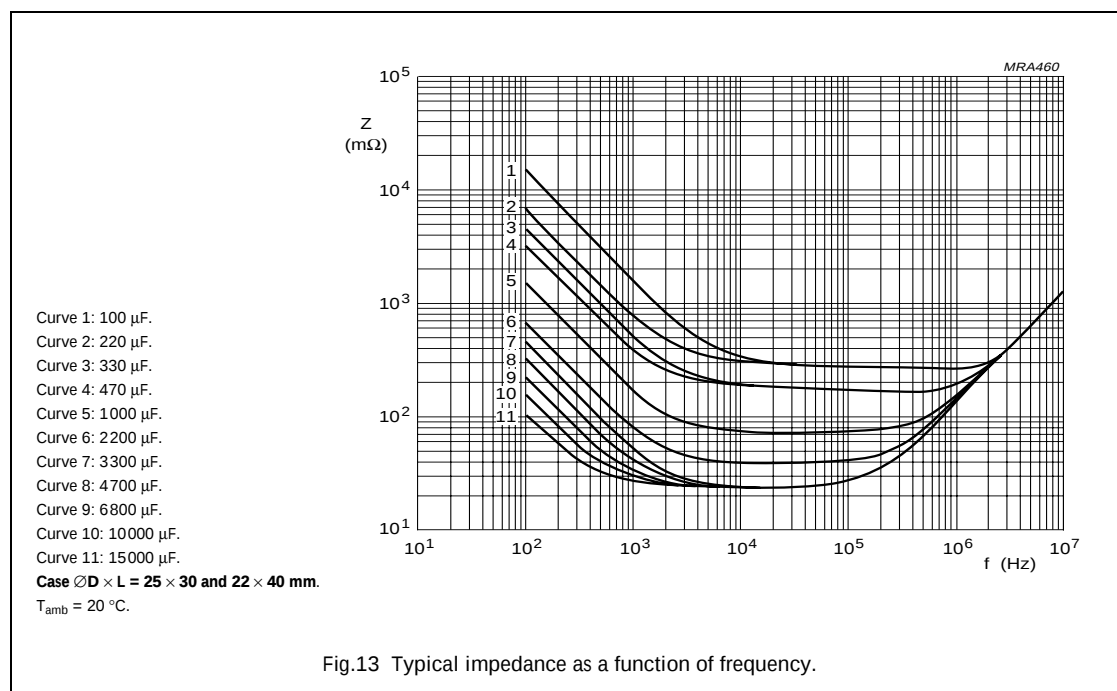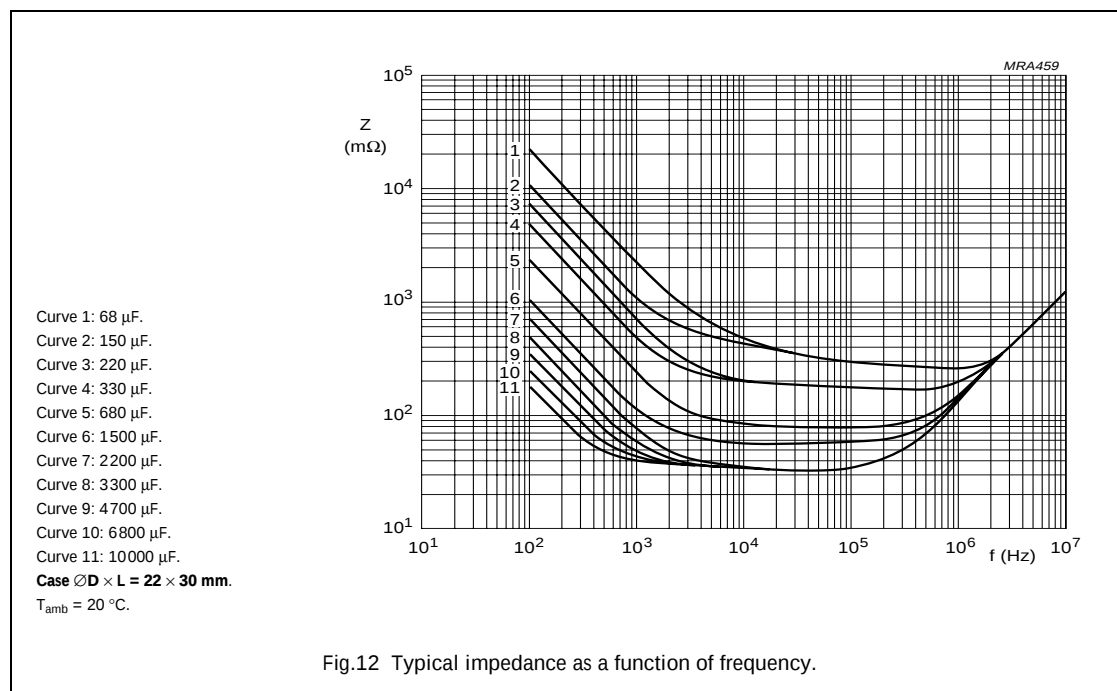

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

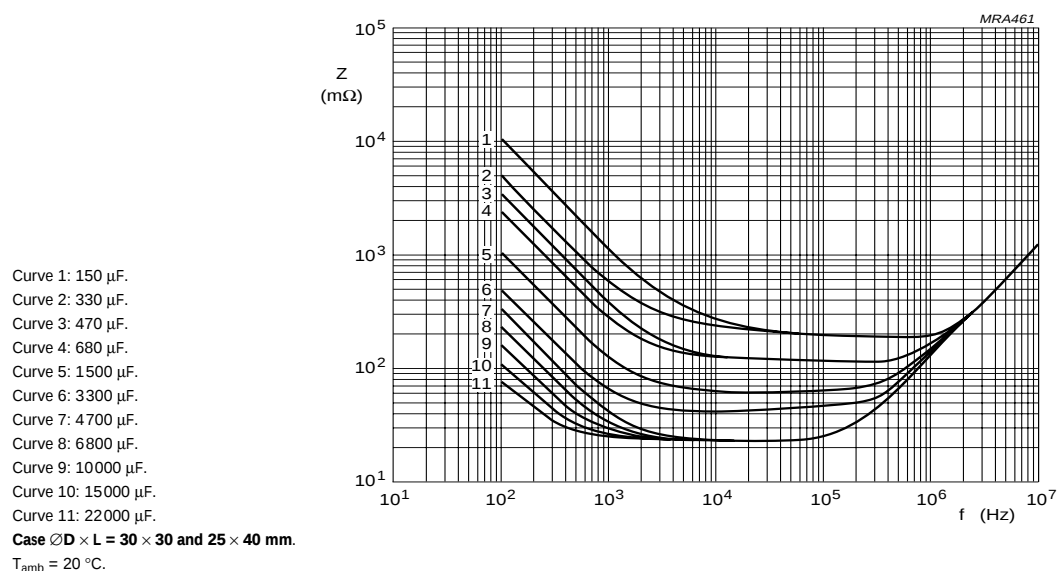


Fig.14 Typical impedance as a function of frequency.



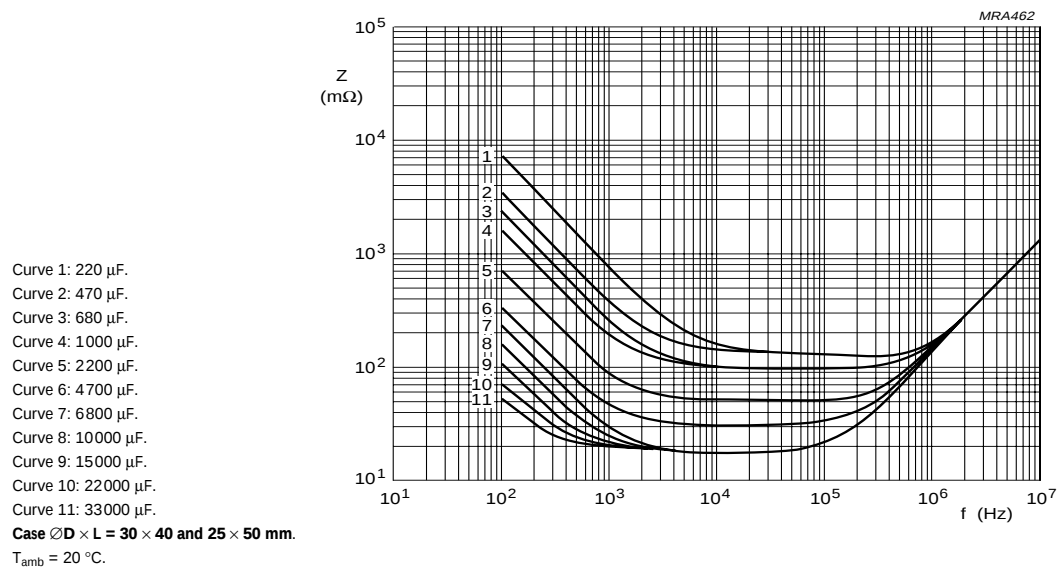


Fig.15 Typical impedance as a function of frequency.

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

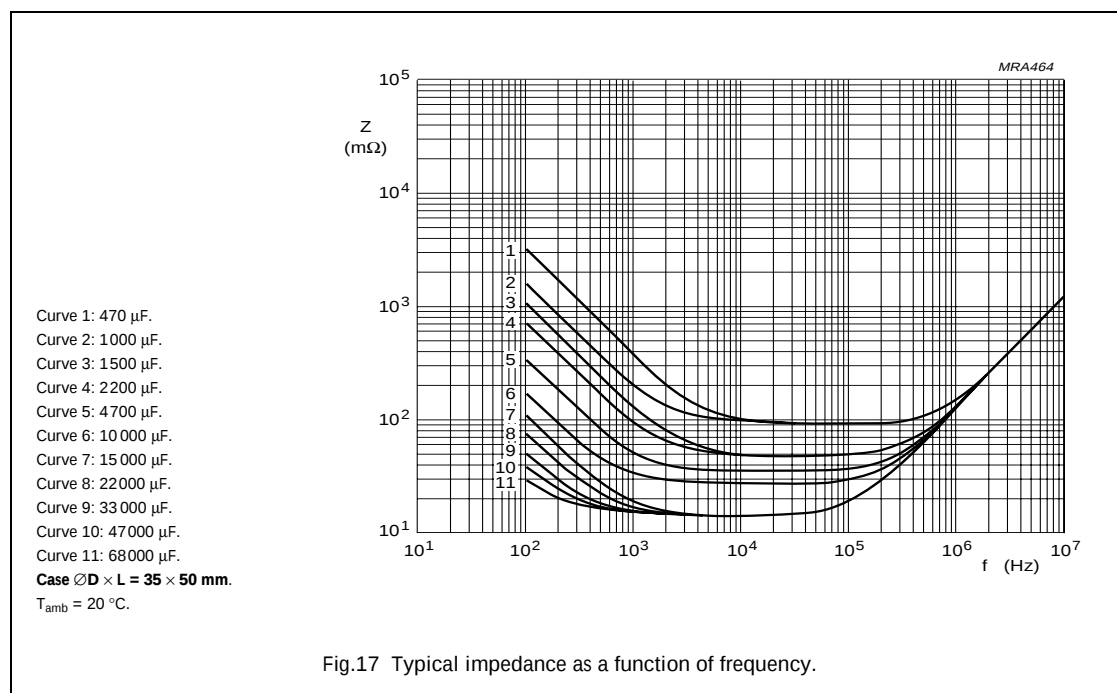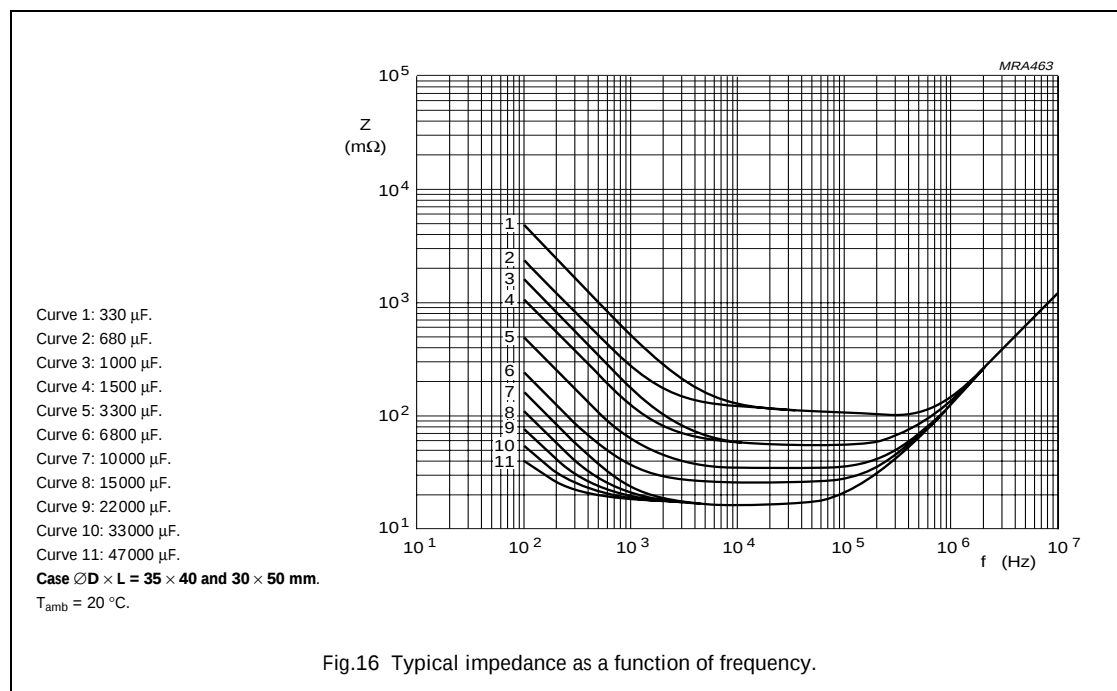


Aluminum electrolytic capacitors
Power Standard Miniature Snap-in

056/057 PSM-SI

RIPPLE CURRENT AND USEFUL LIFE

Table 4 Multiplier of ripple current (I_R) as a function of frequency

FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 10 \text{ to } 25 \text{ V}$	$U_R = 40 \text{ to } 100 \text{ V}$	$U_R > 100 \text{ V}$
50	0.93	0.91	0.86
100	1.00	1.00	1.00
200	1.04	1.05	1.13
400	1.07	1.09	1.21
1000	1.11	1.13	1.29
2000	1.13	1.15	1.32
4000	1.15	1.18	1.35
≥ 10000	1.18	1.22	1.40

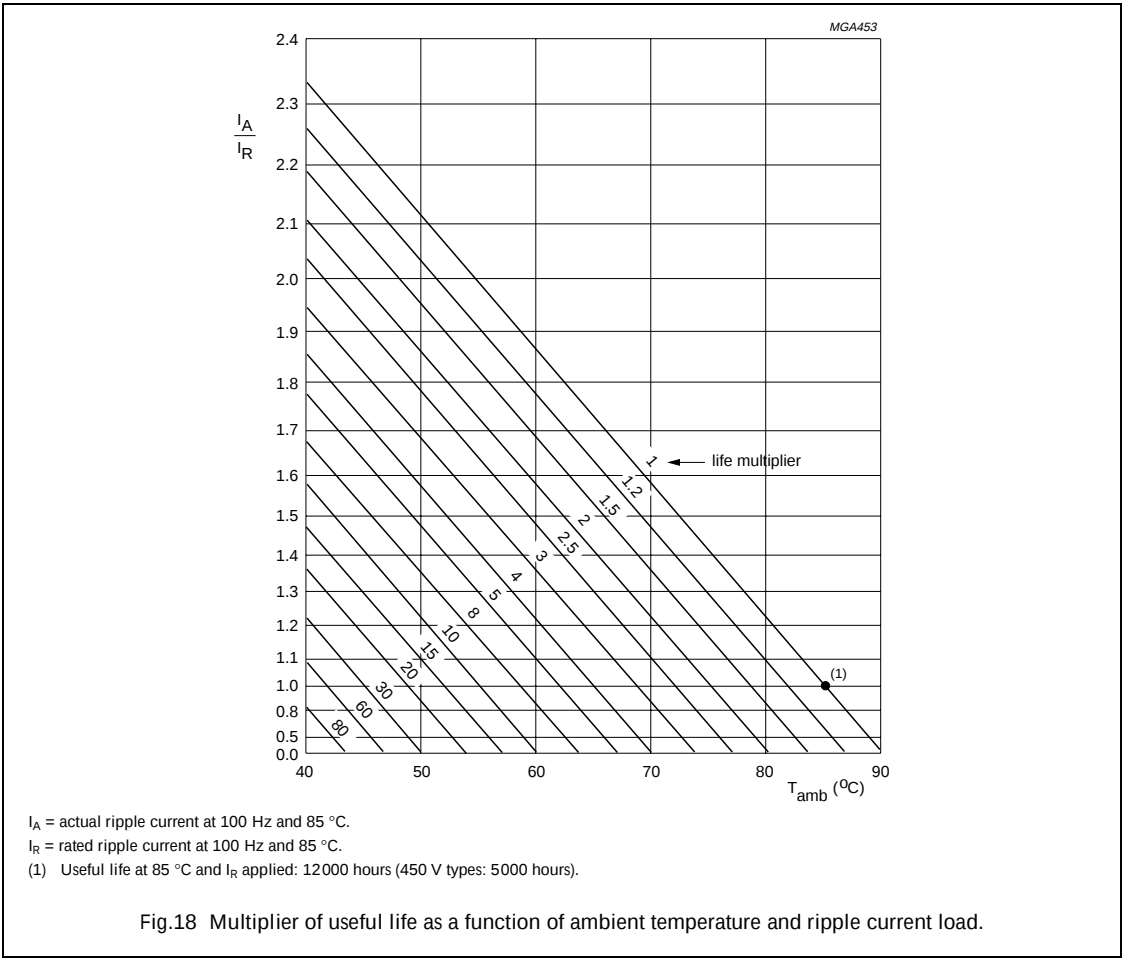

Aluminum electrolytic capacitors Power Standard Miniature Snap-in

056/057 PSM-SI

SPECIFIC TESTS AND REQUIREMENTS

General tests and requirements are specified in this handbook, section “*Tests and Requirements*”.

Table 5 Test procedures and requirements

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85\text{ °C}$; U_R applied; 5000 hours (450 V types: 2000 hours)	$U_R \leq 100\text{ V}$; $\Delta C/C$: $\pm 15\%$ $U_R > 100\text{ V}$; $\Delta C/C$: $\pm 10\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\text{ °C}$; U_R and I_R applied; 12000 hours (450 V types: 5000 hours)	$U_R \leq 100\text{ V}$; $\Delta C/C$: $\pm 45\%$ $U_R > 100\text{ V}$; $\Delta C/C$: $\pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100\text{ V}$: $\leq 1\%$; $U_R > 100\text{ V}$: $\leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85\text{ °C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$: $\pm 10\%$ $ESR \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$