

查询"450YXA22M16X25"供应商

YXA SERIES

105°C Standard


◆ FEATURES

- RoHS compliance.

YXA

Low Impedance

YXF, YXG, ZL, ZLH

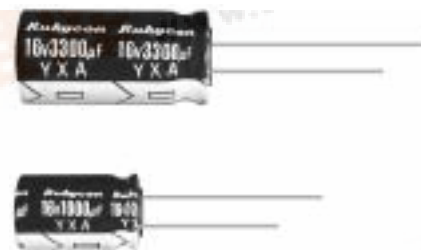


◆ SPECIFICATIONS

[illegible]

◆ DIMENSIONS

(mm)

◆MULTIPLIER FOR RIPPLE CURRENT

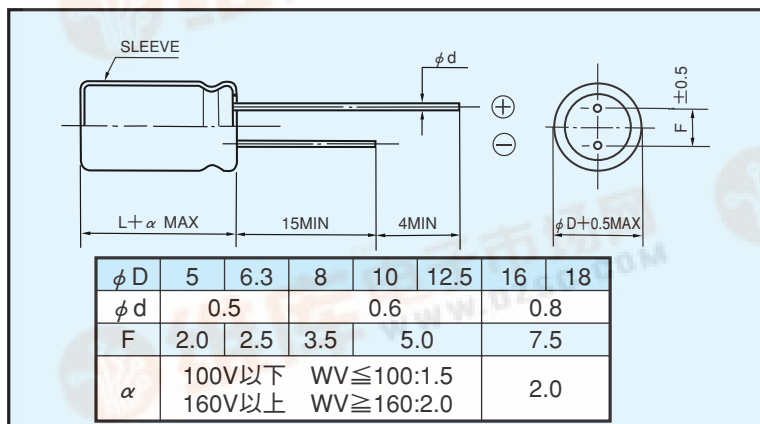


Frequency coefficient

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	0.1~1 μF	0.50	1.00	1.20	1.30	1.50
	2.2~4.7 μF	0.65	1.00	1.20	1.30	1.50
	10~47 μF	0.80	1.00	1.20	1.30	1.50
	100~1000 μF	0.80	1.00	1.10	1.15	1.20
	2200~22000 μF	0.80	1.00	1.05	1.10	1.15

◆PART NUMBER

	YXA					DXL
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size



◆STANDARD SIZE, RATED RIPPLE CURRENT

Size ϕ D×L(mm), Ripple Current (mA r.m.s./105°C, 120Hz)[illegible][illegible]