

- Similar to a Dual Version of SN55/75110A Line Driver
- Improved Stability Over Supply Voltage and Temperature Ranges
- Constant-Current Outputs
- High Output Impedance
- High Common-Mode Output Voltage Range
–3 V to 10 V
- Glitch-Free Power-Up/Power-Down Operation
- TTL-Input Compatibility
- Common-Enable Circuit
- Designed to Be Interchangeable With Motorola MC3453 and Military-Temperature-Range Version of MC3553

description

The MC3453 and MC3553 feature four line drivers with a common-enable input. When the ENABLE input is high, a constant output current is switched between each pair of output terminals in response to the logic level at that channel input. When the ENABLE is low, all channel outputs are nonconductive (transistors biased to cutoff). This minimizes loading in party-line systems where a large number of drivers share the same line.


The driver outputs have a common-mode voltage range of –3 V to 10 V, allowing common-mode voltages on the line without affecting driver performance.

All outputs should be maintained within the recommended common-mode output voltage range to ensure that the channels do not interact with each other. To minimize power dissipation, all unused outputs should be grounded.


All inputs are diode clamped and are designed to satisfy TTL-system requirements. The inputs are tested at 2 V for high-logic-level input conditions and 0.8 V for low-logic-level input conditions. These tests ensure 400 mV of noise margin when interfaced with Series 54/74 TTL.

The MC3453 is characterized for operation from 0°C to 70°C. The MC3553 is characterized for operation over the full military temperature range of –55°C to 125°C.

D, J, OR N . . . PACKAGE
(TOP VIEW)



FK PACKAGE
(TOP VIEW)

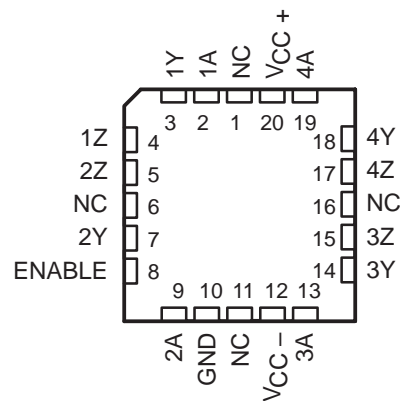

NC—No internal connection

FUNCTION TABLE


| LOGIC INPUT | ENABLE INPUT | OUTPUT CURRENT |
|-------------|--------------|----------------|
| Z | Y | |
| H | H | On Off |
| L | H | Off On |
| H | L | Off Off |
| L | L | Off Off |

L = low logic level, H = high logic level

MC3453, MC3553
QUAD LINE DRIVERS WITH COMMON ENABLE


SLLS091A, FEBRUARY 1989, REVISED FEBRUARY 1993
[查询 MC3453D 供应链](#)

logic symbol†

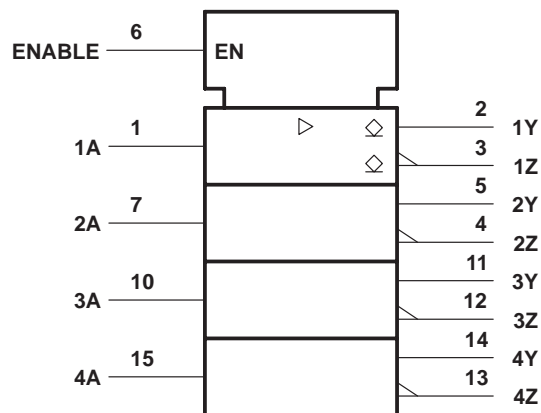


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

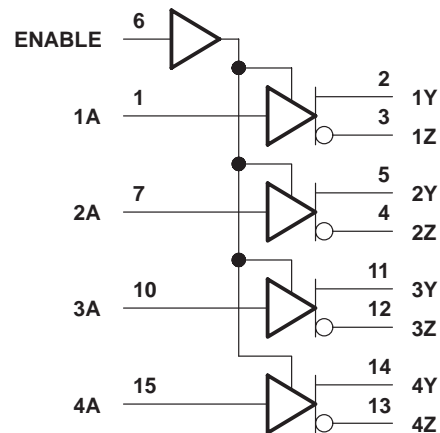

schematics of inputs and outputs

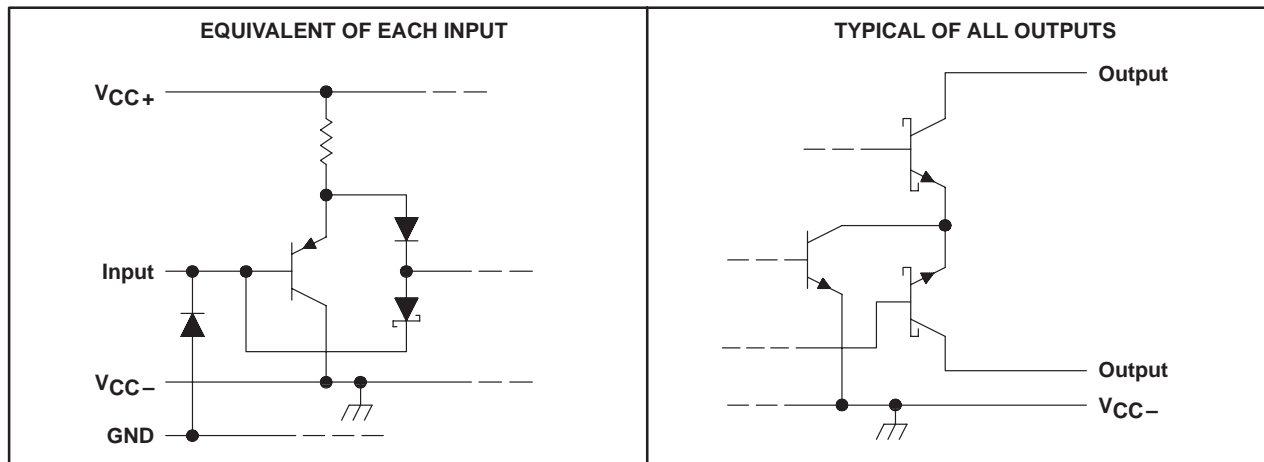

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|--|------------------------------|
| Supply voltage, V_{CC+} (see Note 1) | 7 V |
| Supply voltage, V_{CC-} | -7 V |
| Input voltage (any input) | 5.5 V |
| Output voltage range (any output) | -5 V to 12 V |
| Continuous total dissipation | See Dissipation Rating Table |
| Operating free-air temperature range: MC3453 | 0°C to 70°C |
| MC3553 | -55°C to 125°C |
| Storage temperature range | -65°C to 150°C |
| Case temperature for 60 seconds: FK package | 260°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or N package | 260°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package | 300°C |

NOTE 1: All voltage values are with respect to network ground terminal.

MC3453, MC3553

QUAD LINE DRIVERS WITH COMMON ENABLE

[查询"MC3453D"供应商](#)

SLLS119A – FEBRUARY 1986 – REVISED FEBRUARY 1993

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$ POWER RATING | OPERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING | $T_A = 125^\circ\text{C}$ POWER RATING |
|---------|---|--|--|---|
| D | 950 mW | 7.6 mW/ $^\circ\text{C}$ | 608 mW | — |
| FK | 1375 mW | 11.0 mW/ $^\circ\text{C}$ | 880 mW | 275 mW |
| J | 1375 mW | 11.0 mW/ $^\circ\text{C}$ | 880 mW | 275 mW |
| N | 1150 mW | 9.2 mW/ $^\circ\text{C}$ | 736 mW | — |

recommended operating conditions

| | | MIN | TYP | MAX | UNIT |
|---------------------------------------|-----------------------------|-------|-----|------|------------------|
| Supply voltage, V_{CC+} | $T_A \geq 25^\circ\text{C}$ | 4.5 | 5 | 5.5 | V |
| | $T_A < 25^\circ\text{C}$ | 4.75 | 5 | 5.5 | |
| Supply voltage, V_{CC-} | $T_A \geq 25^\circ\text{C}$ | -4.5 | -5 | -5.5 | V |
| | $T_A < 25^\circ\text{C}$ | -4.75 | -5 | -5.5 | |
| High-level input voltage, V_{IH} | | 2 | | 5.5 | V |
| Low-level input voltage, V_{IL} | | 0 | | 0.8 | V |
| Common-mode output voltage range | V_{OCR+} | 0 | | 10 | V |
| | V_{OCR-} | 0 | | -3 | V |
| Operating free-air temperature, T_A | MC3453 | 0 | | 70 | $^\circ\text{C}$ |
| | MC3553 | -55 | | 125 | |

electrical characteristics over recommended operating free-air temperature range, $V_{CC\pm} = \text{MAX}$ (unless otherwise noted)

| PARAMETER | TEST CONDITIONS† | MIN | TYP‡ | MAX | UNIT |
|---|--|-----------------|------|------|---------------|
| V_{IK} Input clamp voltage | $I_I = -12 \text{ mA}$ | -0.9 | | -1.5 | V |
| $I_{O(on)}$ On-state output current | $V_{CC+} = \text{MAX}, V_{CC-} = \text{MAX}$ | | 11 | 15 | mA |
| | $V_{CC+} = \text{MIN}, V_{CC-} = \text{MIN}$ | 6.5 | 11 | | |
| $I_{O(off)}$ Off-state output current | $V_{CC+} = \text{MIN}, V_{CC-} = \text{MIN}, V_O = 10 \text{ V}$ | | | 100 | μA |
| I_{IH} High-level input current | $V_I = 2.4 \text{ V}$ | | | 40 | μA |
| | $V_I = V_{CC+} \text{ max}$ | | | 1 | mA |
| I_{IL} Low-level input current | $V_I = 0.4 \text{ V}$ | | | -1.6 | mA |
| I_{CC+} Supply current from V_{CC+} | A inputs at 0.4 V | ENABLE at 2 V | 33 | 50 | mA |
| | | ENABLE at 0.4 V | 33 | 50 | |
| I_{CC-} Supply current from V_{CC-} | A inputs at 0.4 V | ENABLE at 2 V | -68 | -90 | mA |
| | | ENABLE at 0.4 V | -31 | -40 | |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC+} = 5 \text{ V}$, $V_{CC-} = -5 \text{ V}$, and $T_A = 25^\circ\text{C}$.

switching characteristics, $V_{CC+} = 5 \text{ V}$, $V_{CC-} = -5 \text{ V}$, $R_L = 50 \Omega$, $C_L = 40 \text{ pF}$, $T_A = 25^\circ\text{C}$

| PARAMETER | FROM (INPUT) | TO (OUTPUT) | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|--------------|-------------|-----------------|-----|-----|-----|------|
| t_{PLH} Propagation delay time, low-to-high level output | A | Y or Z | See Figure 1 | | 9 | 15 | ns |
| t_{PHL} Propagation delay time, high-to-low level output | A | Y or Z | | | 7 | 15 | ns |
| t_{PLH} Propagation delay time, low-to-high level output | ENABLE | Y or Z | | | 14 | 25 | ns |
| t_{PHL} Propagation delay time, high-to-low level output | ENABLE | Y or Z | | | 15 | 25 | ns |





MC3453, MC3553 QUAD LINE DRIVERS WITH COMMON ENABLE

SLLS193X, FEBRUARY 1989, REVISED FEBRUARY 1993

查询 MC3453D 供应商

PARAMETER MEASUREMENT INFORMATION

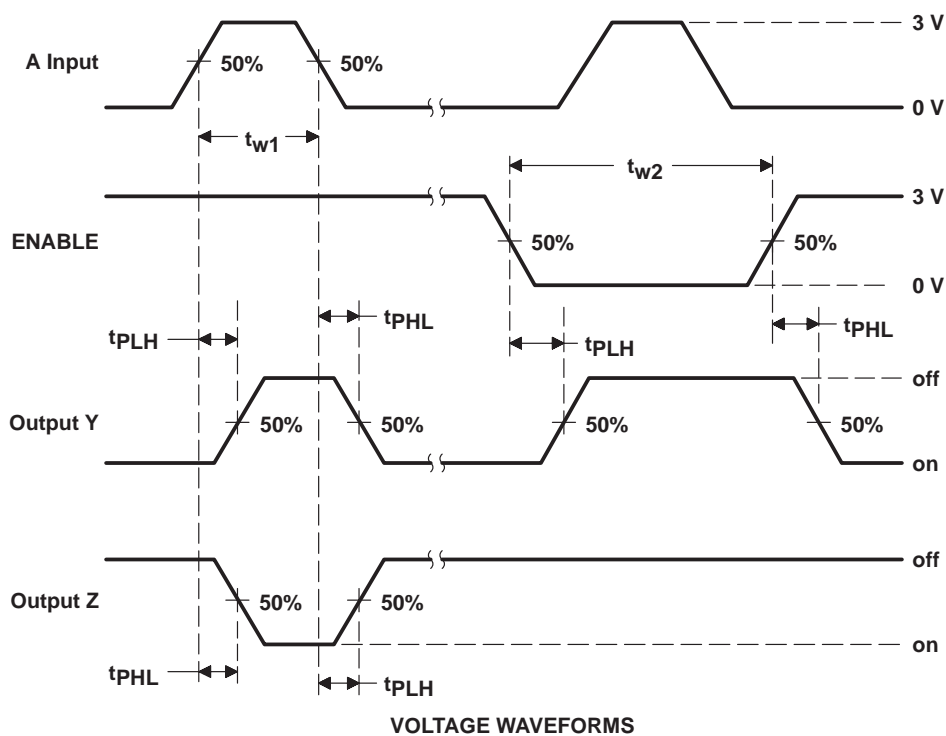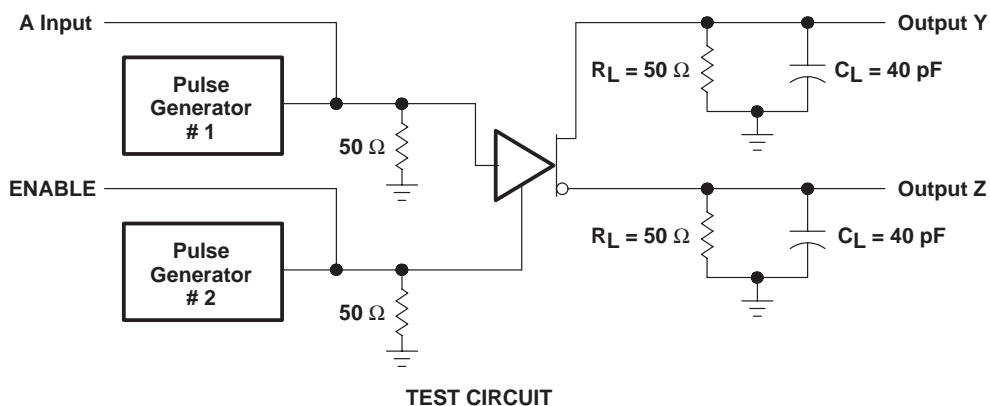

- NOTES: A. The pulse generators have the following characteristics: $Z_O = 50\ \Omega$, $t_r = t_f = 10 \pm 5\ \text{ns}$, $t_{w1} = 200\ \text{ns}$, $\text{PRR} \leq 1\ \text{MHz}$, $t_{w2} = 1\ \mu\text{s}$, $\text{PRR} \leq 500\ \text{kHz}$.
- B. C_L includes probe and jig capacitance.

Figure 1. Test Circuit and Voltage Waveforms

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| MC3453D | OBSOLETE | SOIC | D | 14 | | TBD | Call TI | Call TI |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|------------------|--|--------------------|--|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DSP | dsp.ti.com | Broadband | www.ti.com/broadband |
| Interface | interface.ti.com | Digital Control | www.ti.com/digitalcontrol |
| Logic | logic.ti.com | Military | www.ti.com/military |
| Power Mgmt | power.ti.com | Optical Networking | www.ti.com/opticalnetwork |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| | | Telephony | www.ti.com/telephony |
| | | Video & Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265