

Major Ratings and Characteristics



Characteristics	182NQ030	Units
$I_{F(AV)}$ Rectangular waveform	180	A
V_{RRM}	30	V
I_{FSM} @ $t_p = 5 \mu s$ sine	30,000	A
V_F @ 180Apk, $T_J = 125^\circ C$	0.41	V
T_J range	-55 to 150	$^\circ C$

Description/Features

The 182NQ030 high current Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to $150^\circ C$ junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ C$ T_J operation
- Unique high power, Half-Pak module
- Replaces three parallel DO-5's
- Easier to mount and lower profile than DO-5's
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

CASE STYLE AND DIMENSIONS

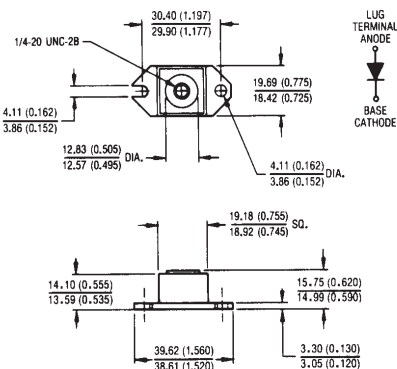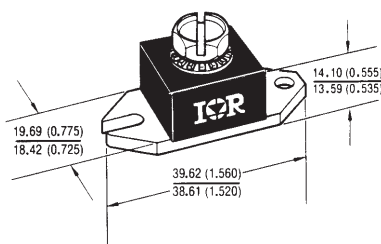

Outline HALF PAK Module

Dimensions in millimeters and inches

182NQ030

PD-2.278 rev. A 12/97

International
IR Rectifier

Voltage Ratings

Part number	182NQ030
V_R Max. DC Reverse Voltage (V)	30
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	182NQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	180	A	50% duty cycle @ $T_C = 107^\circ\text{C}$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	30,000	A	5 μs Sine or 3 μs Rect. pulse
	3450		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	162	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 36\text{ Amps}$, $L = 0.25\text{ mH}$
I_{AR} Repetitive Avalanche Current	36	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	182NQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1) * See Fig. 1	0.51	V	@ 180A $T_J = 25^\circ\text{C}$
	0.61	V	@ 360A
	0.41	V	@ 180A $T_J = 125^\circ\text{C}$
	0.54	V	@ 360A
I_{RM} Max. Reverse Leakage Current (1) * See Fig. 2	15	mA	$T_J = 25^\circ\text{C}$
	840	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance	7700	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	6.0	nH	From top of terminal hole to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters		182NQ	Units	Conditions
T _J	Max. Junction Temperature Range	-55 to 150	°C	
T _{stg}	Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case	0.30	°C/W	DC operation * See Fig. 4
R _{thCS}	Typical Thermal Resistance, Case to Heatsink	0.15	°C/W	Mounting surface, smooth and greased
wt	Approximate Weight	25.6(0.9)	g(oz.)	
T	Mounting Torque	Min.	40(35)	Non-lubricated threads
		Max.	58(50)	
	Terminal Torque	Min.	58(50)	
		Max.	86(75)	
Case Style		HALF PAK Module		

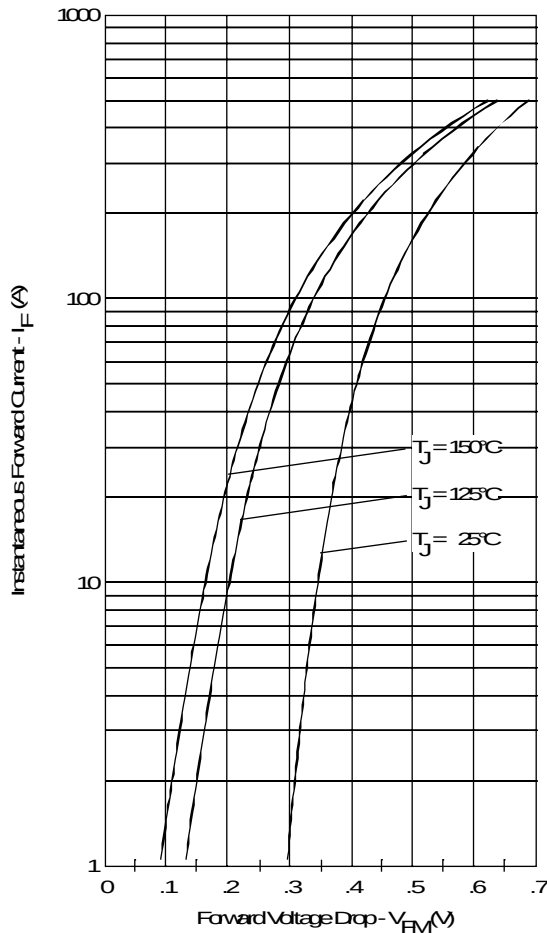


Fig. 1 - Maximum Forward Voltage Drop Characteristics

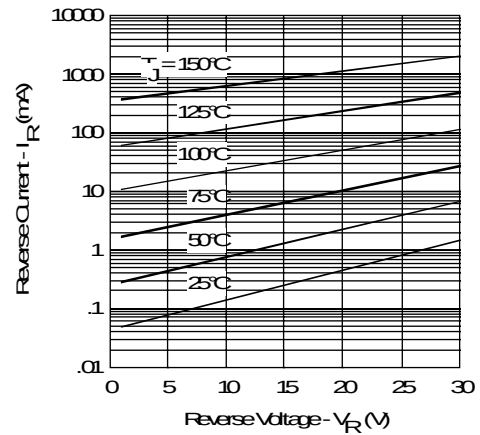


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

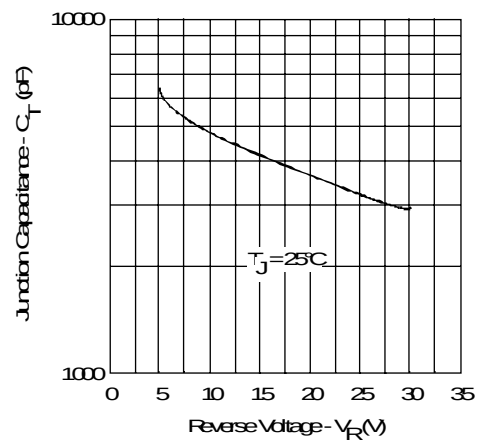


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

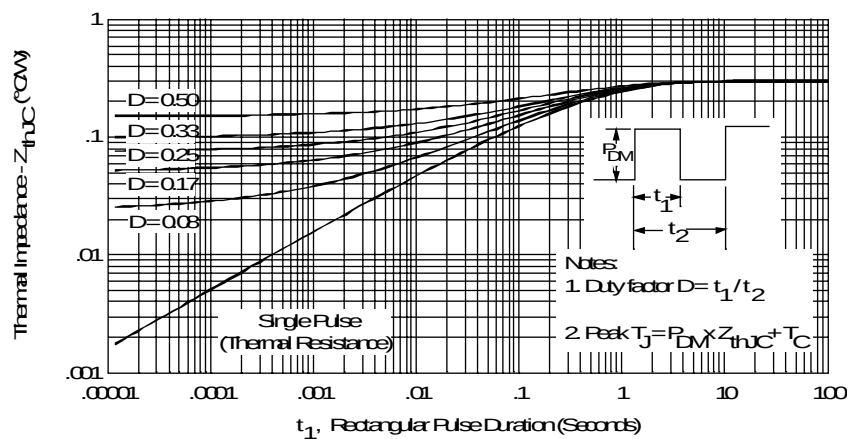


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

182NQ030

PD-2.278 rev. A 12/97

International
IR Rectifier

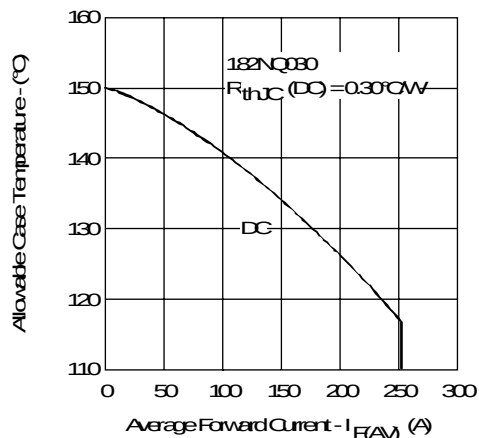


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

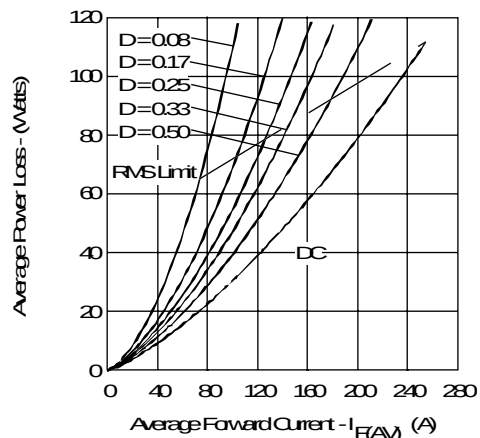


Fig. 6 - Forward Power Loss Characteristics

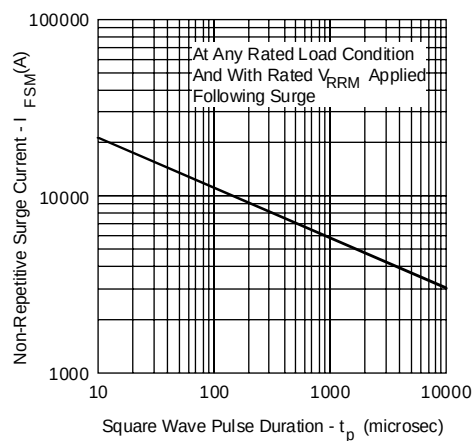


Fig. 7 - Maximum Non-Repetitive Surge Current

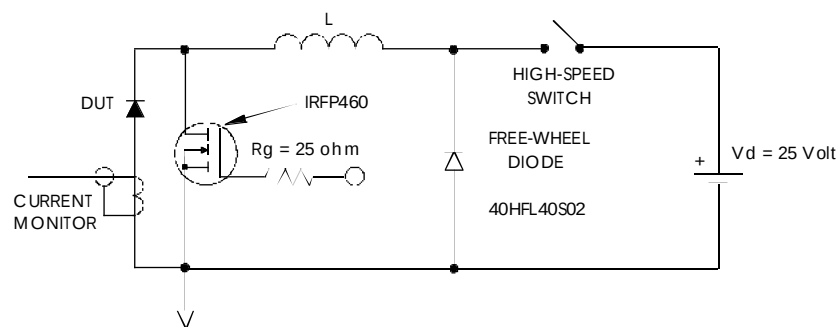


Fig. 8 - Unclamped Inductive Test Circuit