

A300R Series

查询"A323R"供应商

Compact, Regulated, 3W Single & Dual Output DC/DC Converters



Key Features:

- 3W Output Power
- Compact DIP Case
- 500 VDC Isolation
- Tight Line/Load Regulation
- Single & Dual Outputs
- 20 Standard Models
- 1.0 MH MTBF
- Industry Standard Pin-Out

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
	48 VDC Input	43.2	48.0	52.8	
Input Filter	π (Pi) Filter				
Reverse Polarity Input Current				0.5	A
Short Circuit Input Power				2,500	mW

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±2.0	±4.0	%
Output Voltage Balance	Dual Output, Balanced Loads		±1.0	±3.0	%
Line Regulation	Vin = Min to Max		±0.2	±0.3	%
Load Regulation	Iout = 10% to 100%		±0.2	±0.5	%
Ripple & Noise (20 MHz) (Note 1)			40	50	mV P - P
Ripple & Noise (20 MHz)	Over Line, Load & Temp.			75	mV P - P
Ripple & Noise (20 MHz)				5	mV rms
Output Power Protection		120			%
Transient Recovery Time (Note 2)	50% Load Step Change			50	µSec
Transient Response Deviation				±6.0	%
Temperature Coefficient			±0.01	±0.02	%/°C
Output Short Circuit	Continuous				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	500			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		100	150	pF
Switching Frequency		40	80		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range		-25		+71	°C
		-25		+90	°C
		-40		+125	°C
Storage Temperature Range					
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	1.25 x 0.80 x 0.40 Inches (31.8 x 20.3 x 10.2 mm)
Case Material	Non-Conductive Black Plastic (UL94-V0)
Weight	0.42 Oz (12g)

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	600			kHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		7.5	VDC
	12 VDC Input	-0.7		15.0	
	24 VDC Input	-0.7		30.0	
	48 VDC Input	-0.7		55.0	
Lead Temperature	1.5 mm From Case For 10 Sec.			260	°C
Internal Power Dissipation	All Models			3,000	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

MicroPower Direct

232 Tosca Drive
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerelectronics.com

W: www.micropowerelectronics.com



Model Selection Guide


查询"A323R"供应商

Model Number	Voltage (VDC)		Current (mA)		Reflected Ripple Current (mA, Typ)	Output			Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Nominal	Range	Full-Load	No-Load		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)		
A301R	5	4.5 - 5.5	1,000	100	100	5.0	600	0.0	60	1,500
A302R	5	4.5 - 5.5	960	100	100	12.0	250	0.0	62	1,500
A303R	5	4.5 - 5.5	960	100	100	15.0	200	0.0	62	1,500
A304R	5	4.5 - 5.5	1,000	100	100	±12.0	±125	±0.0	60	1,500
A305R	5	4.5 - 5.5	1,000	100	100	±15.0	±100	±0.0	60	1,500
A311R	12	10.8 - 13.2	420	50	40	5.0	600	0.0	60	700
A312R	12	10.8 - 13.2	400	50	40	12.0	250	0.0	62	700
A313R	12	10.8 - 13.2	400	50	40	15.0	200	0.0	62	700
A314R	12	10.8 - 13.2	420	50	40	±12.0	±125	±0.0	60	700
A315R	12	10.8 - 13.2	420	50	40	±15.0	±100	±0.0	60	700
A321R	24	21.6 - 26.4	210	25	25	5.0	600	0.0	60	350
A322R	24	21.6 - 26.4	195	25	25	12.0	250	0.0	64	350
A323R	24	21.6 - 26.4	195	25	25	15.0	200	0.0	64	350
A324R	24	21.6 - 26.4	210	25	25	±12.0	±125	±0.0	60	350
A325R	24	21.6 - 26.4	210	25	25	±15.0	±100	±0.0	60	350
A331R	48	43.2 - 52.8	105	15	10	5.0	600	0.0	60	135
A332R	48	43.2 - 52.8	100	15	10	12.0	250	0.0	62	135
A333R	48	43.2 - 52.8	100	15	10	15.0	200	0.0	62	135
A334R	48	43.2 - 52.8	105	15	10	±12.0	±125	±0.0	60	135
A335R	48	43.2 - 52.8	105	15	10	±15.0	±100	±0.0	60	135

Notes:

- When measuring output ripple, it is recommended that an external 0.33 μ F ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. For noise sensitive applications, the use of 1.5 μ F capacitors will reduce the output ripple.
- Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- Dual output units may be connected to provide a 24 VDC or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the stability of the converter. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up. In this case, it is recommended that a low ESR (ESR <1.0 Ω at 100 kHz) capacitor be mounted close to the converter. For 5V input units a 2.2 μ F is recommended, for 12V input units, a 1.0 μ F; and for 24V & 48V units a 0.47 μ F.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Derating Curve

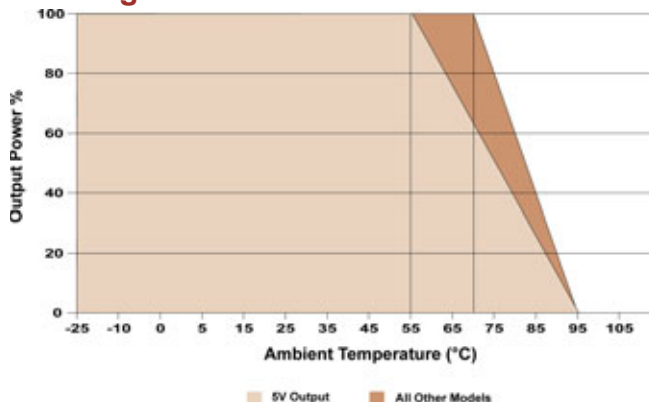

Pin Connections

Pin	Single	Dual
1, 24	+Vin	+Vin
2, 23	NC	-Vout
3, 22	NC	Common
10, 15	-Vout	Common
11, 14	+Vout	+Vout
12, 13	-Vin	-Vin

NC: No Connection


Capacitive Load

Single Output	Dual Output
470 μ F Max	±220 μ F Max

Mechanical Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.01 (± 0.25)
- Leads are tin plated for improved solderability.

Mechanical Dimensions

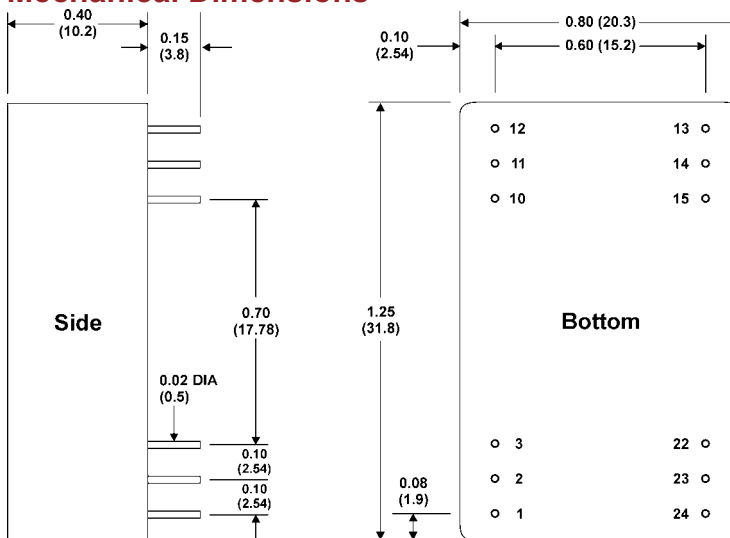

MicroPower Direct
www.micropowerdirect.com