


E100E Series

查询"E101E"供应商

Low Cost, 1W Ultra-Miniature SIP DC/DC Converters

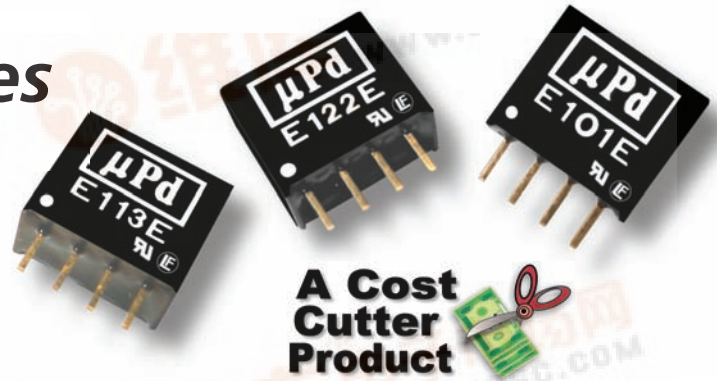

Key Features:

- 1W Output Power
- Ultra-Miniature SIP Case
- UL Approved (File E245422)
- 1,000 VDC Isolation
- >3.5 MHour MTBF
- 5V, 12V & 24V Inputs
- **LOWEST COST!!**



RoHS Compliant



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerelectronics.com
W: www.micropowerelectronics.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
Reverse Polarity Input Current				0.3	A
Input Filter	Internal Capacitor				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0	±3.0	%
Line Regulation	For Vin Change of 1%			±1.2	%
Load Regulation (Note 1)	See Model Selection Guide				
Ripple & Noise (20 MHz) (Note 2)			75	150	mV P - P
Output Power Protection		120			%
Temperature Coefficient			±0.01	±0.03	%/°C
Output Short Circuit	Momentary (0.5 Sec.)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	1,000 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			100		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	0.46 x 0.23 x 0.40 Inches (11.7 x 6.0 x 10.2 mm)				
Case Material	Non-Conductive Black Plastic (UL-94V0)				
Weight	0.05 Oz (1.3g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
	24 VDC Input	-0.7		30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C
Internal Power Dissipation	All Models			650	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.



Model Selection Guide

Model Number	Input Voltage (VDC)		Current (mA)		Voltage (VDC)	Output Current (mA)		Load Regulation (% Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Nominal	Range	Full-Load	No-Load		(mA, Max)	(mA, Min)			
E101E	5	4.5 - 5.5	250	20	5.0	200.0	20.0	15	78	500
E102E	5	4.5 - 5.5	253	20	9.0	111.0	12.0	15	79	500
E103E	5	4.5 - 5.5	262	20	12.0	83.0	9.0	15	80	500
E104E	5	4.5 - 5.5	250	20	15.0	67.0	7.0	15	78	500
E111E	12	10.8 - 13.2	107	16	5.0	200.0	20.0	15	78	200
E112E	12	10.8 - 13.2	104	16	9.0	111.0	12.0	15	80	200
E113E	12	10.8 - 13.2	103	16	12.0	83.0	9.0	15	81	200
E114E	12	10.8 - 13.2	105	16	15.0	67.0	7.0	15	79	200
E121E	24	21.6 - 26.4	53	7	5.0	200.0	20.0	15	79	100
E122E	24	21.6 - 26.4	52	7	9.0	111.0	12.0	15	80	100
E123E	24	21.6 - 26.4	51	7	12.0	83.0	9.0	15	81	100
E124E	24	21.6 - 26.4	53	7	15.0	67.0	7.0	15	79	100
E125E	24	21.6 - 26.4	52	7	24.0	42.0	4.0	15	80	100

Other input/output combinations are available (i.e. 3.3 VDC). Contact the factory for details at: sales@micropowerdirect.com

Notes:

- Output load regulation is specified for a load change of 10% to 100%.
- These units should not be operated with a load under 10% of full load. Operation at no-load may cause damage to the unit.

- These converters will operate without external components. However, when measuring output ripple, it is recommended that an external ceramic capacitor be placed from the +Vout pin to the -Vout pin. An input capacitor will enhance stability over

Vin	Input Capacitor	Vout	Output Capacitor
5 VDC	4.7 μ F	5 VDC	10.0 μ F
12 VDC	2.2 μ F	9 VDC	4.7 μ F
24 VDC	1.0 μ F	12 VDC	2.2 μ F
		15 VDC	1.0 μ F
		24 VDC	0.47 μ F

temperature and input line variations. Recommended capacitor values are given in the table above. For applications requiring very low output noise levels, a simple LC filter should be effective.

- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.


Pin Connections

Pin	Description
1	-Vin
2	+Vin
3	-Vout
4	+Vout


Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.01 (± 0.25)
- Pin 1 is marked by a "dot" or indentation on the side of the unit

Derating Curve

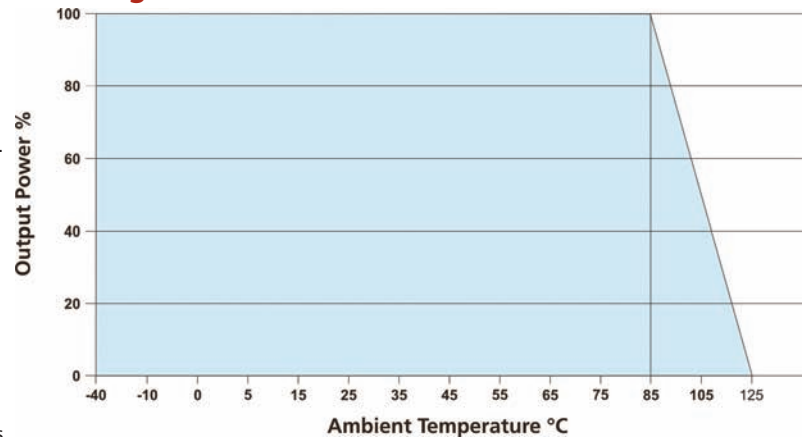

Mechanical Dimensions

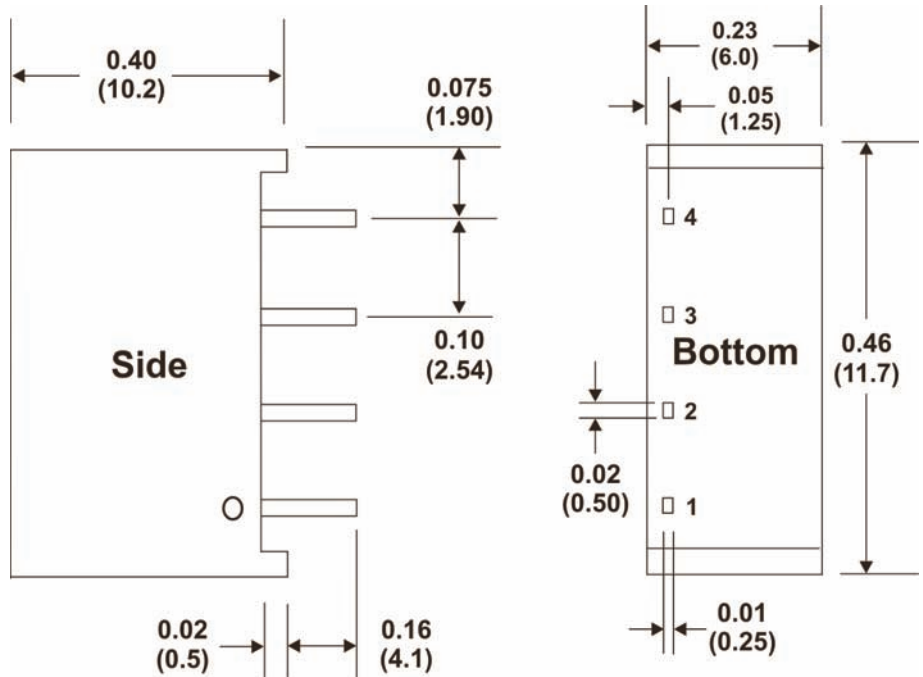

MicroPower Direct
www.micropowerdirect.com