


SEMiX 403GB128Ds

查询"SEMIX403GB128DS" 07/16/2017 供应商

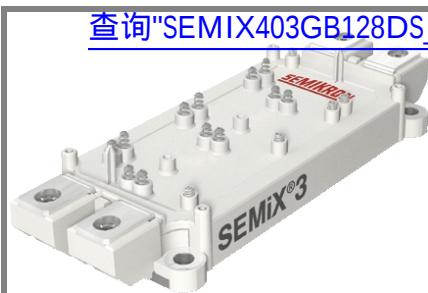

SEMiX® 3s

SPT IGBT Modules

SEMiX 403GB128Ds


Preliminary Data

Features

- Homogeneous Si
- SPT = Soft-Punch-Through technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability

Typical Applications

- AC inverter drives
- UPS
- Electronic welders up to 20 kHz









GB

07 供应商







Absolute Maximum Ratings		T _{case} = 25°C, unless otherwise specified		
Symbol	Conditions	Values		Units
IGBT				
V _{CES}	T _j = 25 °C	1200		V
I _C	T _j = 150 °C	T _{case} = 25 °C	420	A
		T _{case} = 80 °C	300	A
I _{CRM}	I _{CRM} =2xI _{Cnom}	450		A
V _{GES}		±20		V
t _{psc}	V _{CC} = 600 V; V _{GE} ≤ 20 V; T _j = 125 °C V _{CES} < 1200 V	10		μs
Inverse Diode				
I _F	T _j = 150 °C	T _{case} = 25 °C	340	A
		T _{case} = 80 °C	235	A
I _{FRM}	I _{FRM} =2xI _{Fnom}	450		A
I _{FSM}	t _p = 10 ms; sin. T _j = 25 °C	2000		A
Module				
I _{t(RMS)}		600		A
T _{vj}		-40 ... + 150		°C
T _{stg}		-40 ... + 125		°C
V _{isol}	AC, 1 min.	4000		V

Characteristics		T _{case} = 25°C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 9 mA	4,5	5	6,5	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _j = 25 °C			0,3	mA
V _{CE0}	T _j = 25 °C T _j = 125 °C		1 0,9	1,15 1,05	V V
r _{CE}	V _{GE} = 15 V T _j = 25°C T _j = 125°C		4 5,3	5,3 6,7	mΩ mΩ
V _{CE(sat)}	I _{Cnom} = 225 A, V _{GE} = 15 V T _j = 25°C _{chiplev.} T _j = 125°C _{chiplev.}		1,9 2,1	2,35 2,55	V V
C _{ies} C _{oes} C _{res}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		20,8 1,4 0,9		nF nF nF
Q _G	V _{GE} = -8 V ... +15 V		2150		nC
t _{d(on)} t _r E _{on}	R _{Gon} = 4 Ω	V _{CC} = 600V I _{Cnom} = 225A T _j = 125 °C	145 60 20		ns ns mJ
t _{d(off)} t _f E _{off}	R _{Goff} = 4 Ω		575 70 23		ns ns mJ
R _{th(j-c)}	per IGBT			0,075	K/W


查询"SEMiX403GB128DS-07"供应商

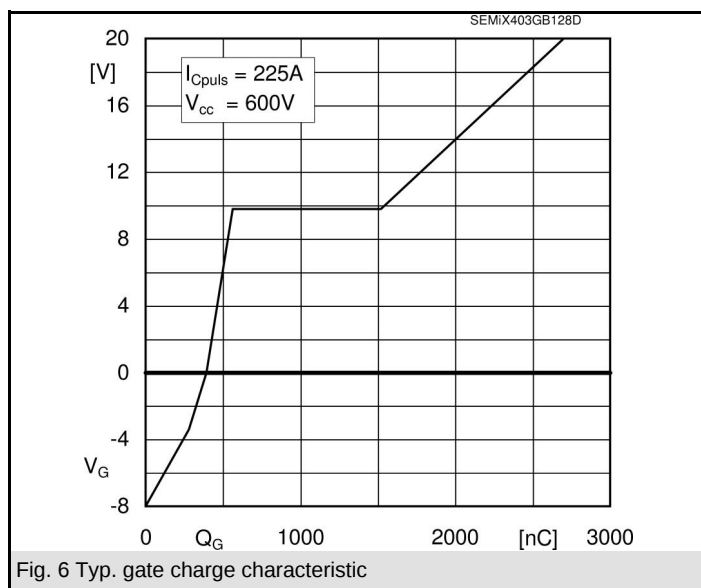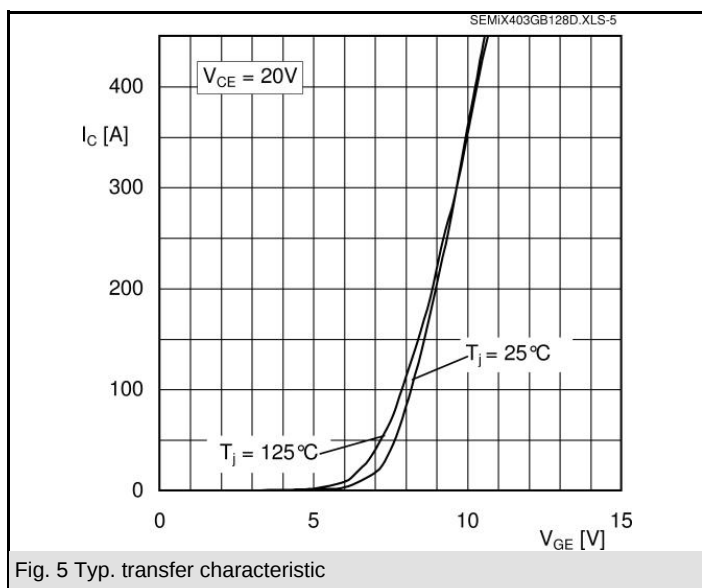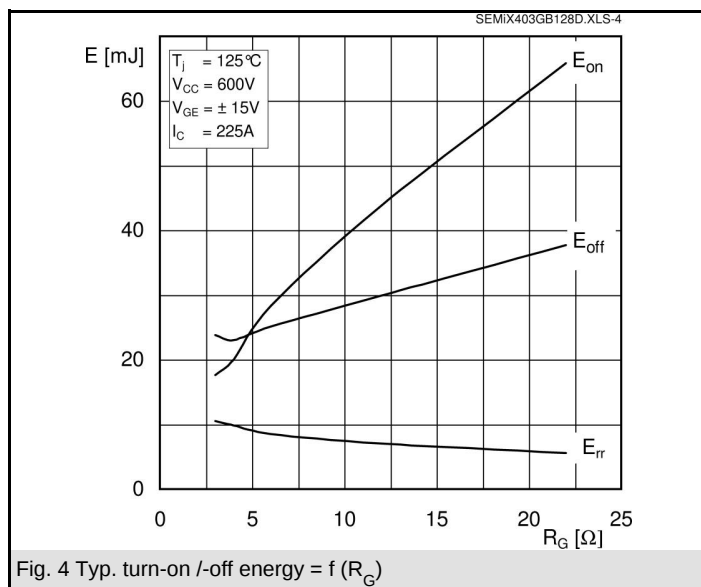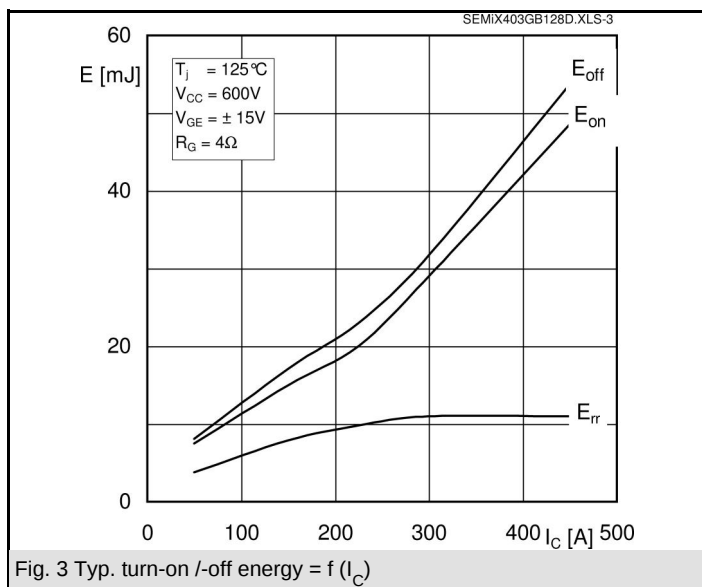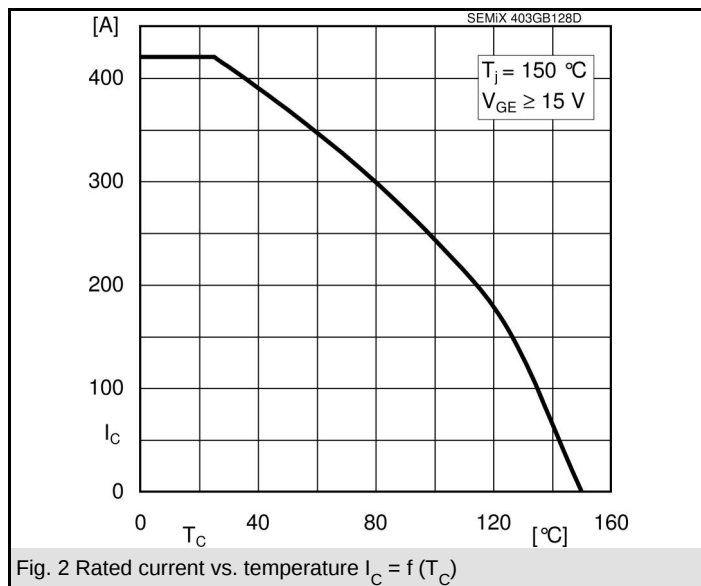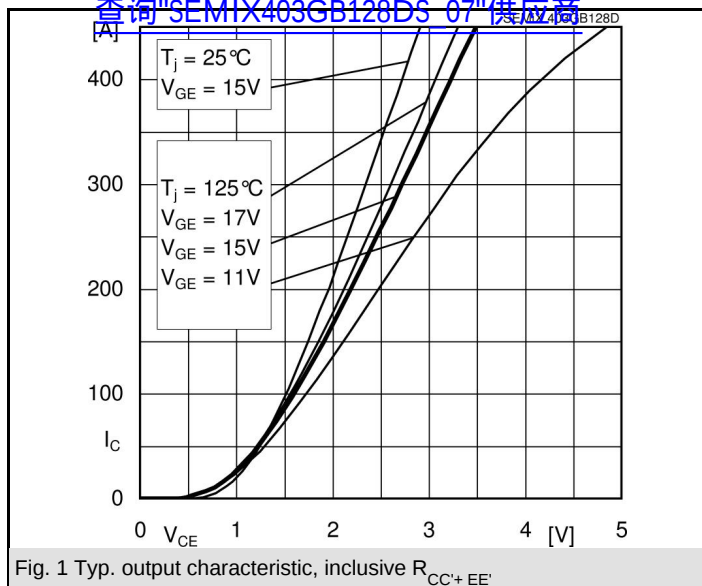


查询"SEMiX403GB128DS_07"供应商

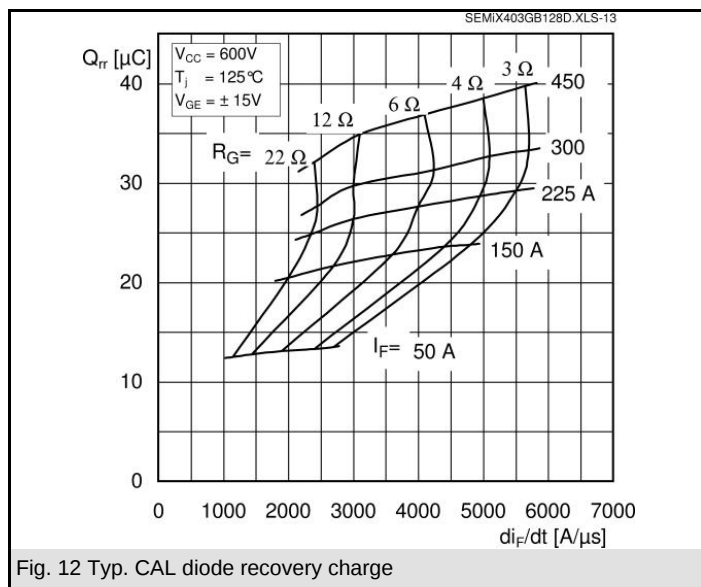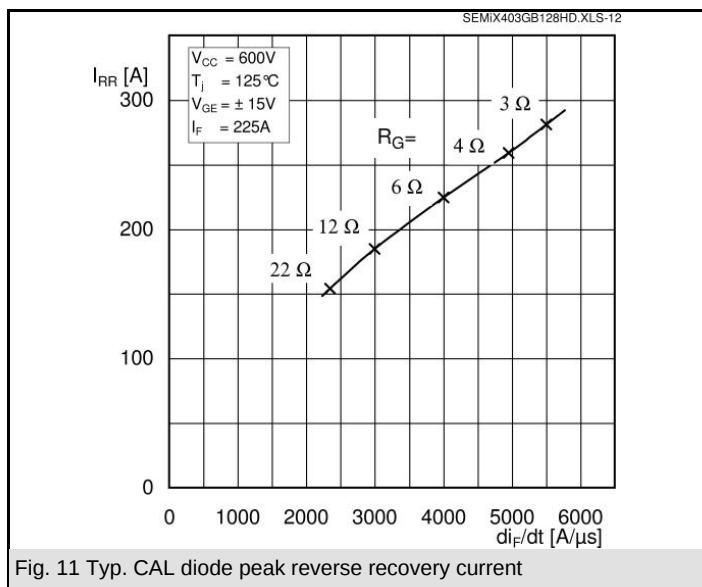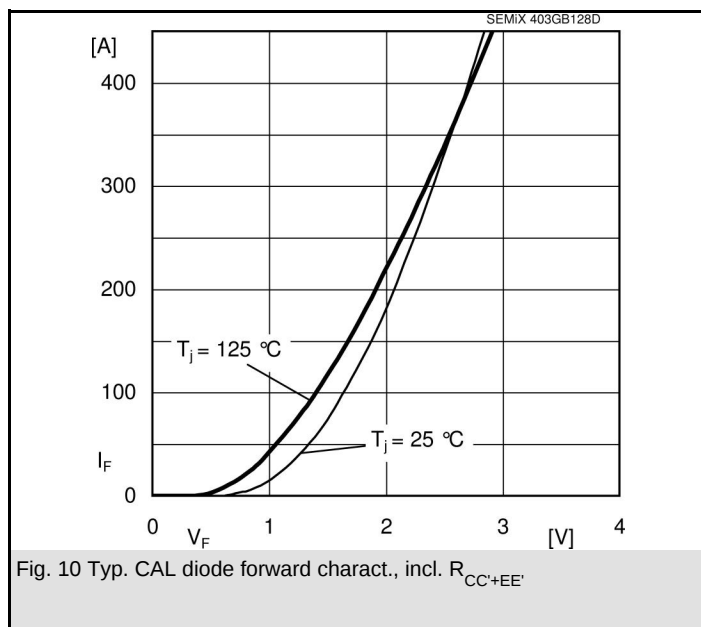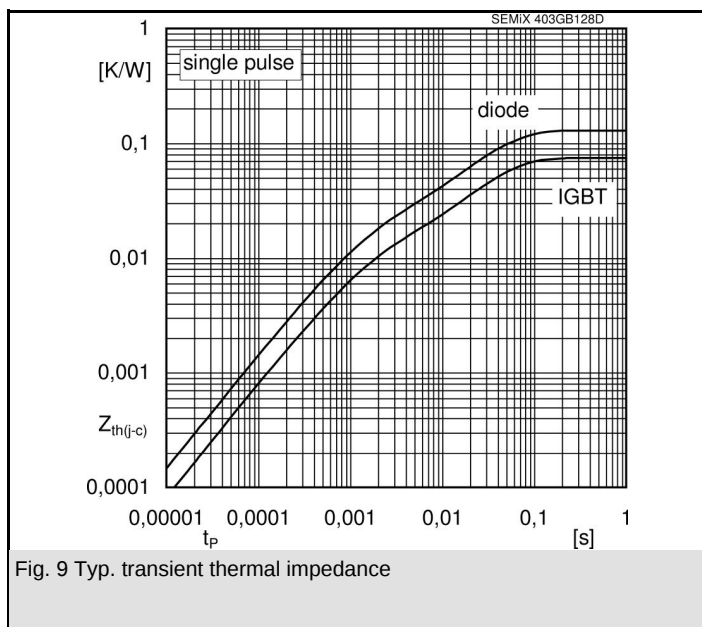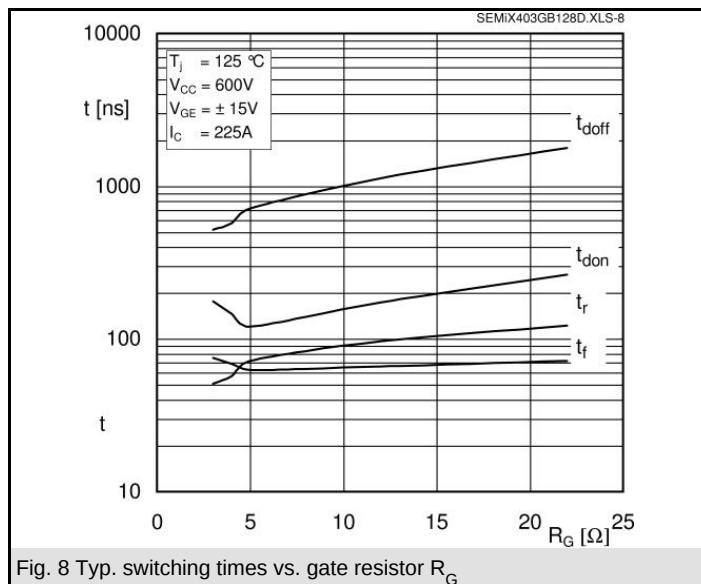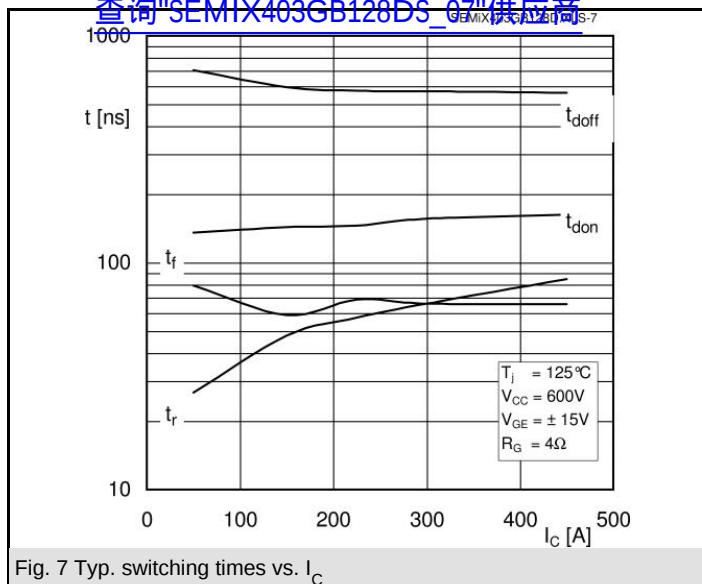

查询"SEMiX403GB128DS_07"供应商

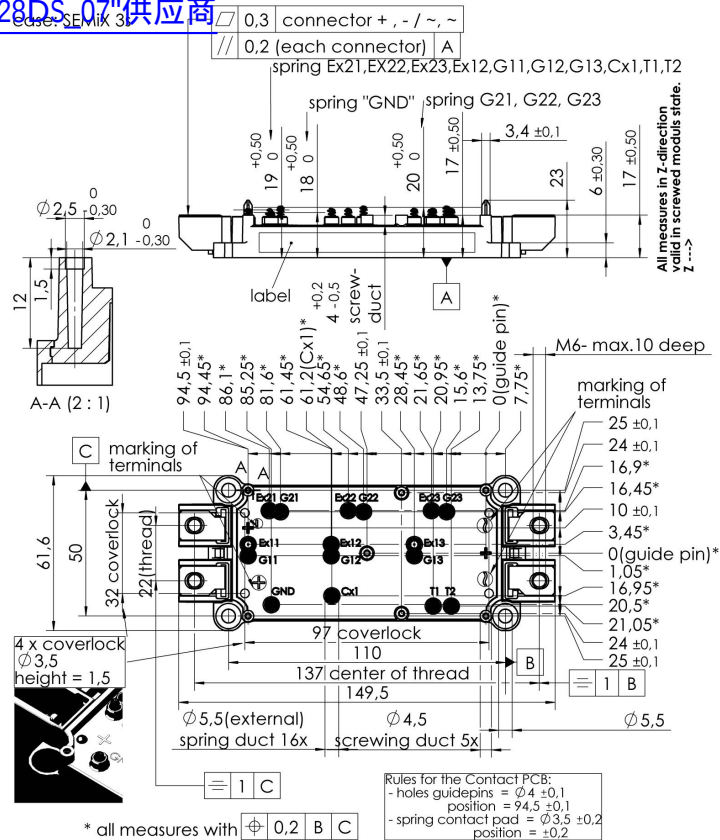

Case SEMiX 3s

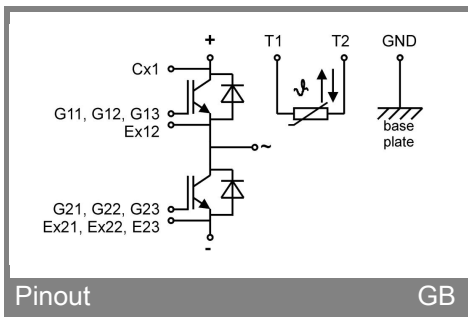

Pinout

GB