

Features

- 9.6 cm [3.8"] display size
- Wide temperature range
(Topr : -30°C to + 85°C, Tstg : -40°C to +95°C)
- Built-in CCFT backlight


Specifications

Parameter		Unit
Display size	9.6 [3.8]	cm ["]
No. of pixels	76 800	pixel
Dot format (H x V)	320 x RGB x 240	dot
Dot pitch (H x V)	0.082 x 0.223	mm
Active area (H x V)	78.7 x 53.6	mm
Input signal system	6-bit digital RGB	-
Input video signal	6-bit digital	-
Viewing direction	6 : 00	-

Parameter		Unit
Backlight type	CCFT	-
Brightness	450	cd/m ²
Power Consumption	3.4	W
Overall dimensions (W x H x D)	117.6 x 69.45 x 13.45	mm
Weight	125	g
Operating temperature	-30 to +85	°C
Storage temperature	-40 to +95	°C

Outline Dimensions

unit : mm

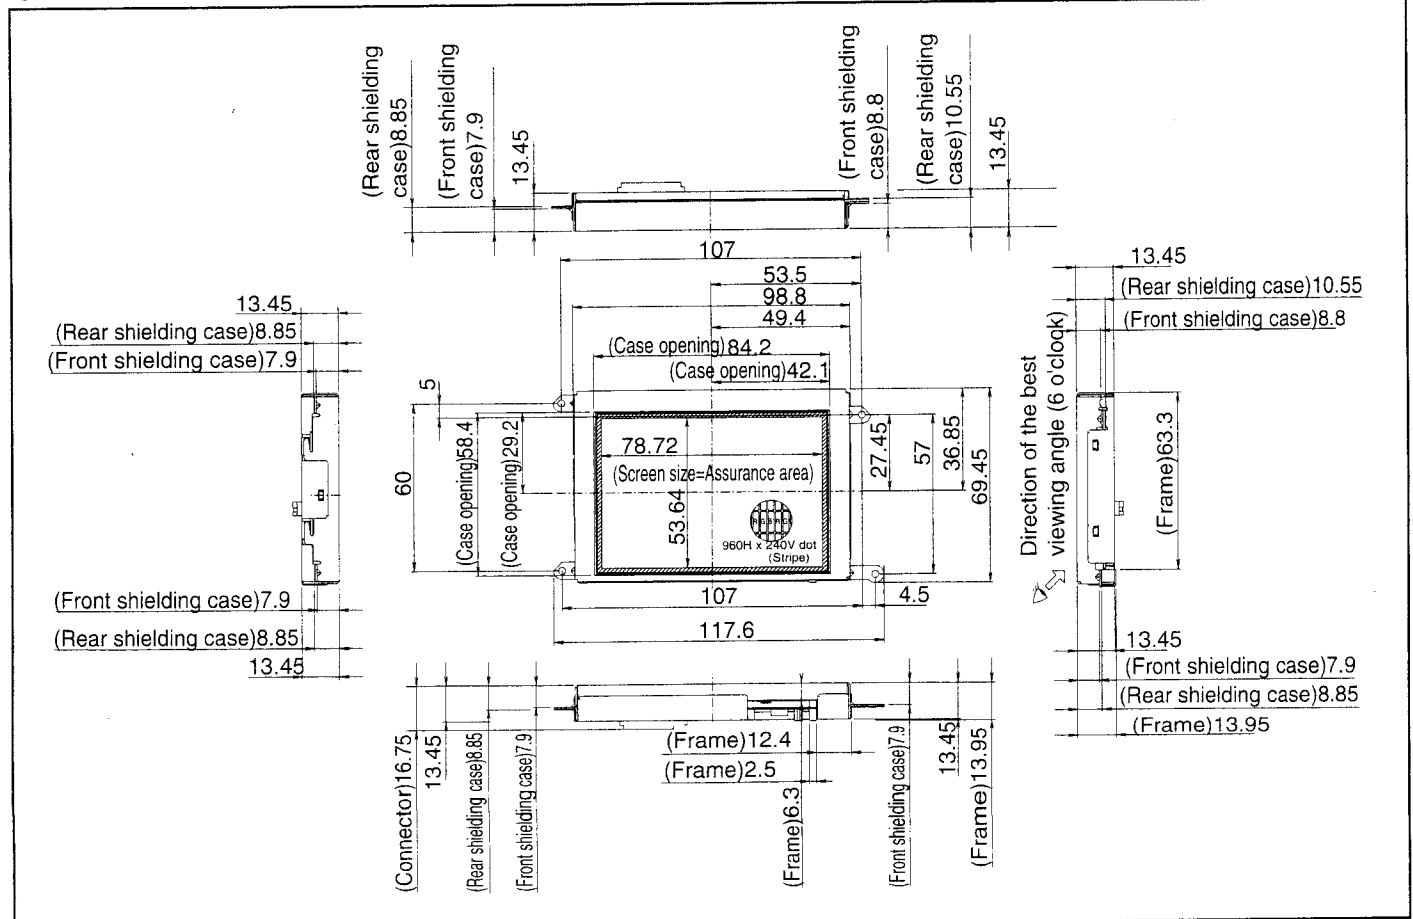

[查询"LQ038Q5DR01"供应商](#)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied.

ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP[®]

NORTH AMERICA

EUROPE

JAPAN