


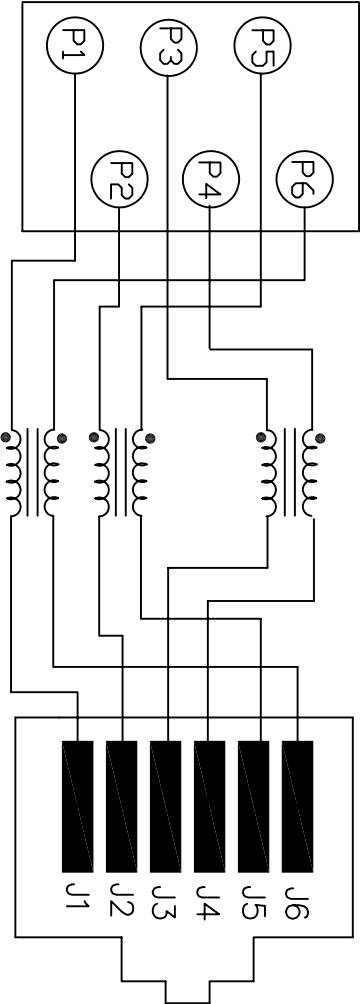


ELECTRICAL SPECIFICATIONS:

- 1.0 INDUCTANCE: P2-J2=P5-J5 ; P3-J3=P4-J4 ;
P1-J1=P6-J6 : 65 uH TYP @ 0.1V, 10 KHz
- 2.0 DC RESISTANCE: P2-J2=P5-J5 ; P3-J3=P4-J4 ;
P1-J1=P6-J6 : 0.5 ohm MAX
- 3.0 COMMON MODE:

<u>FREQUENCY (MHZ)</u>	<u>CMAK-dB) MIN</u>
1	5
10	15
20	15
70	20
200	17
500	6

[查询"SI-60154-F"供应商](#)





Bel Stewart Connector


11118 Susquehanna Trail, South
Glen Rock, Pa 17327-9199
717.234.7512

Magjack
<http://www.stewartconnector.com>

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

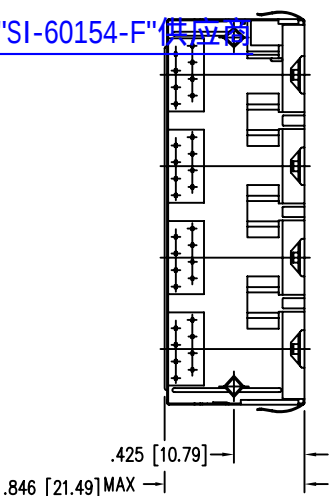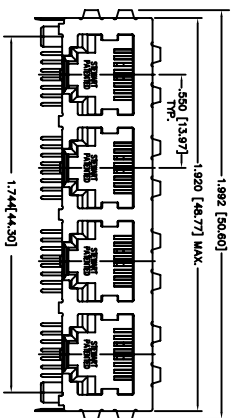

- 50 MICRO-INCHES MIN. IN CONTACT AREA.
2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
4. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE $\pm .005$ [0.13]
5. WAVE SOLDER COMPATIBLE - PREHEAT 125°C/90SECS.



Gleil Rock, F-a 1/32/-3133
717.234.7512

<http://www.stewartconnector.com>

Wagback

HEET
2 OF 2

DRAWING NO

9. S-60154-F

REV. 1-1