

[查询"CS11025.0"供应商](#)

## SPECIFICATIONS

|                       |                                              |
|-----------------------|----------------------------------------------|
| Electrical Ratings    | 50mA @ 48VDC                                 |
| Electrical Life       | 100,000 cycles typical                       |
| Contact Resistance    | < 50 mΩ initial                              |
| Actuation Force       | 100 +/- 50gF<br>160 +/- 30gF<br>260 +/- 50gF |
| Actuator Travel       | .25 +/- .1mm                                 |
| Dielectric Strength   | 1000Vrms min                                 |
| Insulation Resistance | > 1000MΩ min                                 |
| Operating Temperature | -40°C to 85°C                                |
| Storage Temperature   | -40°C to 85°C                                |



## MATERIALS

|           |                                |
|-----------|--------------------------------|
| Actuator  | 4/6 Nylon                      |
| Housing   | 4/6 Nylon                      |
| Cover     | Stainless Steel                |
| Contacts  | Phosphor Bronze, Silver Plated |
| Terminals | Brass, Silver Plated           |


## ORDERING INFORMATION

|                                     |                    |             |             |
|-------------------------------------|--------------------|-------------|-------------|
| <b>1. Series:</b>                   | <b>CS1102</b>      | <b>11.0</b> | <b>F260</b> |
| CS1102                              |                    |             |             |
| <b>2. Actuator Length "L" (mm):</b> |                    |             |             |
| 4.3                                 |                    |             |             |
| 5.0                                 |                    |             |             |
| 7.0                                 |                    |             |             |
| 7.5                                 |                    |             |             |
| 8.0                                 |                    |             |             |
| 9.5                                 |                    |             |             |
| 11.0                                |                    |             |             |
| 11.5                                |                    |             |             |
| 12.0                                |                    |             |             |
| 13.0                                |                    |             |             |
| 14.5                                |                    |             |             |
| 15.0                                |                    |             |             |
| 17.0                                |                    |             |             |
| S2.8 = 2.8mm square head            |                    |             |             |
| <b>3. Actuation Force:</b>          |                    |             |             |
| F100 = 100gF                        |                    |             |             |
| F160 = 160gF                        |                    |             |             |
| F260 = 260gF                        |                    |             |             |
| <b>4. Cap Options:</b>              | <b>Cap Colors:</b> |             |             |
| Blank = No Cap                      | 1 = White          |             |             |
| C01                                 | 2 = Black          |             |             |
| C02                                 | 9 = Gray           |             |             |
| C03                                 |                    |             |             |



| Part Number | "L" (mm) | Part Number | "L" (mm) |
|-------------|----------|-------------|----------|
| CS11024.3   | 4.3      | CS110211.5  | 11.5     |
| CS11025.0   | 5.0      | CS110212.0  | 12.0     |
| CS11027.0   | 7.0      | CS110213.0  | 13.0     |
| CS11027.5   | 7.5      | CS110214.5  | 14.5     |
| CS11028.0   | 8.0      | CS110215.0  | 15.0     |
| CS11029.5   | 9.5      | CS110217.0  | 17.0     |
| CS110211.0  | 11.0     | CS1102S2.8  | 7.5      |

查询"CS11025.0"供应商

## DIMENSIONS

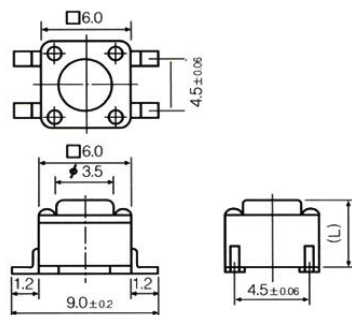


## PC LAYOUT & SCHEMATIC

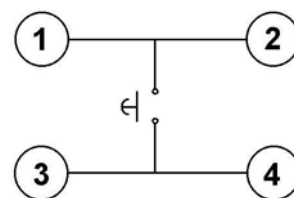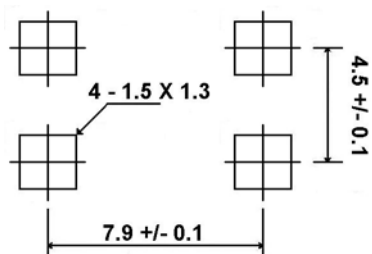


## CAP OPTIONS


(Available with S2.8 actuator only)



**C01**



**C02**



**C03**