

2SB1203,
2SD1803

查询"2SB1203Q"供应商



2044

PNP/NPN Epitaxial Planar
Silicon Transistors

T-33-19
T-33-09

High-Current Switching Applications

©2085B

Applications

- Relay drivers, high-speed inverters, converters, and other general high-current switching applications

Features

- Low collector-to-emitter saturation voltage
- High current and high f_T
- Excellent linearity of h_{FE}
- Fast switching time
- Small and slim package making it easy to make 2SB1203/2SD1803-applied sets smaller

(): 2SB1203

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector to Base Voltage	V_{CBO}	(-)60	V
Collector to Emitter Voltage	V_{CEO}	(-)50	V
Emitter to Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)5	A
Peak Collector Current	i_{cp}	(-)8	A
Collector Dissipation	P_C	1	W
		20	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

$T_c = 25^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)40\text{V}, I_E = 0$			(-)1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4\text{V}, I_C = 0$			(-)1	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE} = (-)2\text{V}, I_C = (-)0.5\text{A}$	70		400	
	$h_{FE}(2)$	$V_{CE} = (-)2\text{V}, I_C = (-)4\text{A}$	35			
Gain-Bandwidth Product	f_T	$V_{CE} = (-)5\text{V}, I_C = (-)1\text{A}$		(130)		MHz
				180		MHz
Output Capacitance	c_{ob}	$V_{CE} = (-)10\text{V}, f = 1\text{MHz}$		(60)		pF
				40		pF




Continued on next page.

※: The 2SB1203/2SD1803 are classified by 0.5A h_{FE} as follows:

70	Q	140	100	R	200	140	S	280	200	T	400
----	---	-----	-----	---	-----	-----	---	-----	-----	---	-----

Case Outline 2044
(unit: mm)

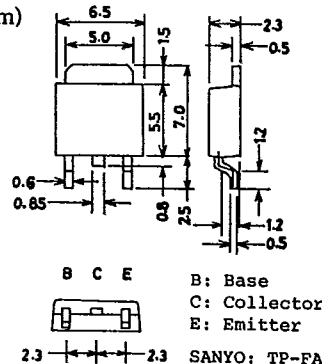

8309MO/3097AT, TS No.2085-1/4

2SB1203/2SD1803

T-33-19


T-33-09

查询"2SB1203Q"供应商





Continued from preceding page.

C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)3A, I_B = (-)0.15A$	min	typ	max	unit
				(-280)	(-550)	mV
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)3A, I_B = (-)0.15A$		220	400	mV
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	(-)	60		V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)	50		V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	(-)	6		V
Turn-on Time	t_{on}	See specified Test Circuit.		(50)		ns
				50		ns
Storage Time	t_{stg}			(450)		ns
				500		ns
Fall Time	t_f			(20)		ns
				20		ns

Switching Time Test Circuit








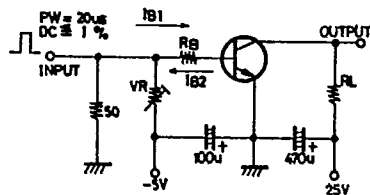


$I_C = 10I, I_{B1} = -10I, I_{B2} = 2A$
(For PNP, the polarity is reversed.)

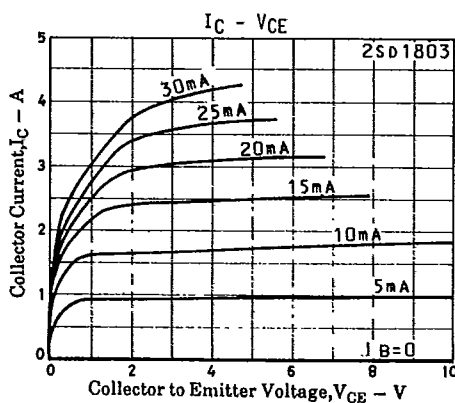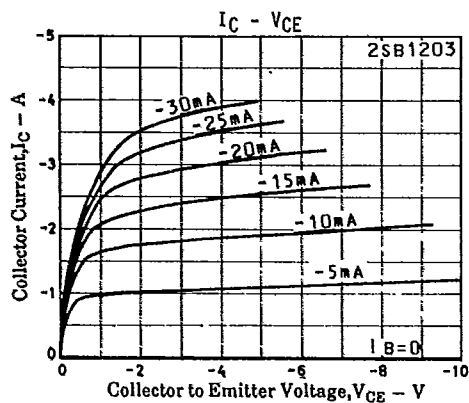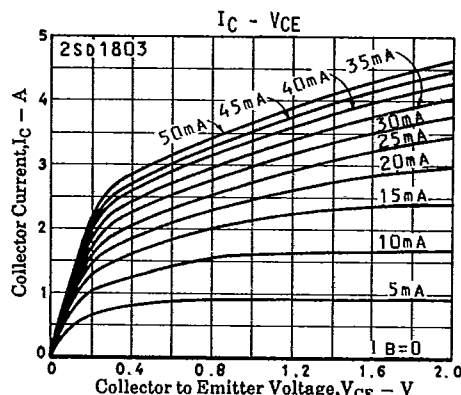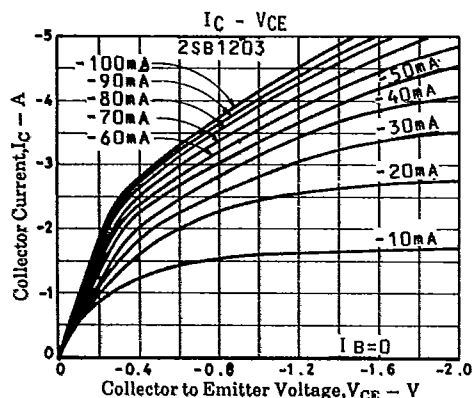

2SB1203/2SD1803







查询"2SB1203Q"供应商

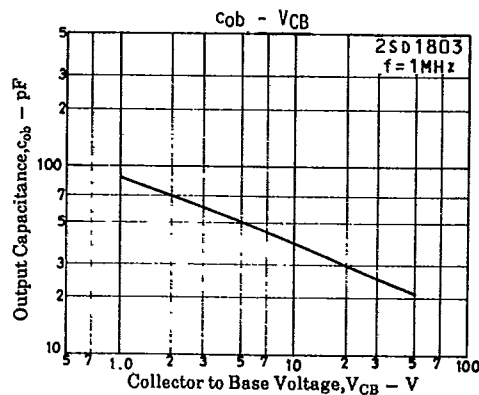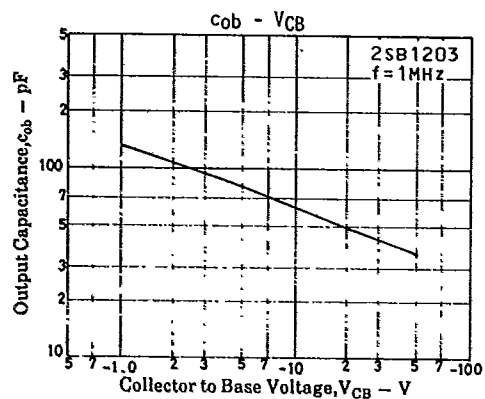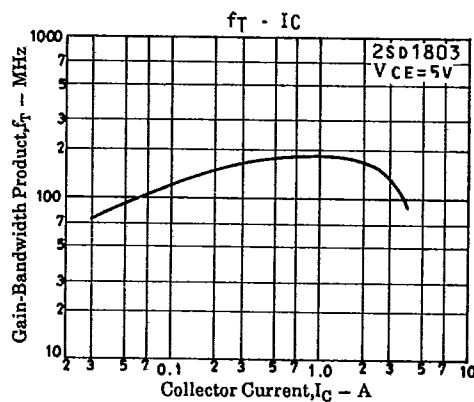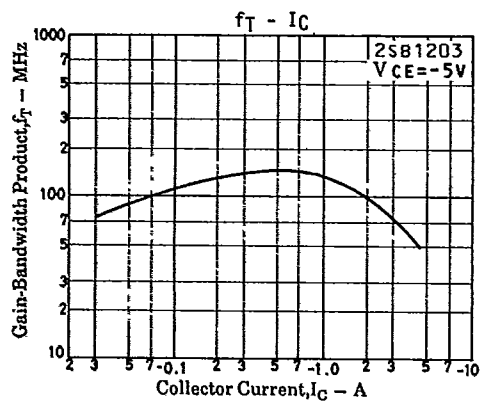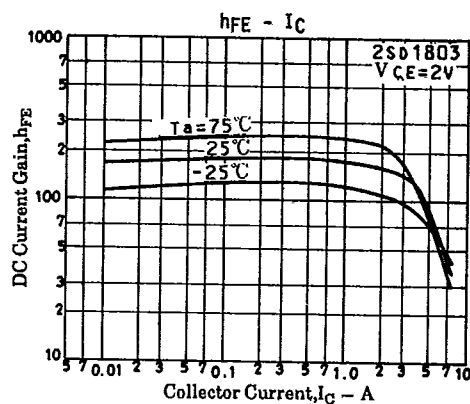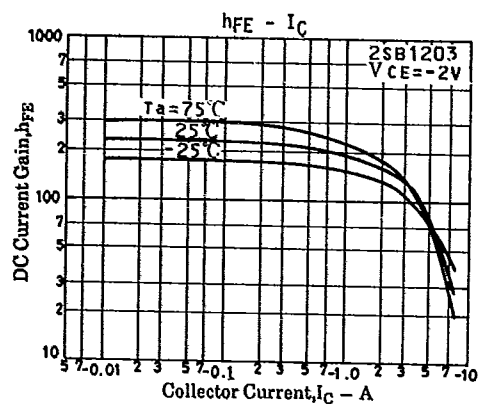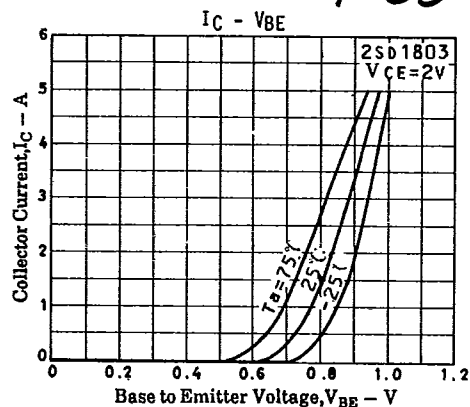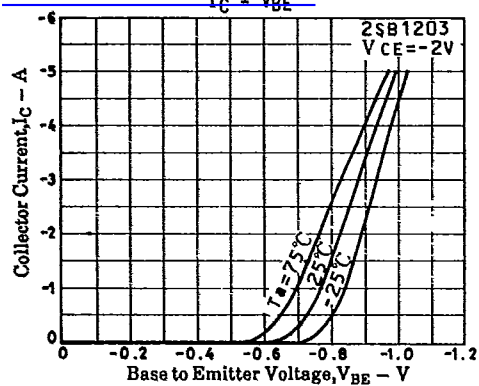 $I_C - V_{BE}$ 

2SB1203/2SD1803

T-33-19
T-33-09

查询“2SB1203Q”供应商

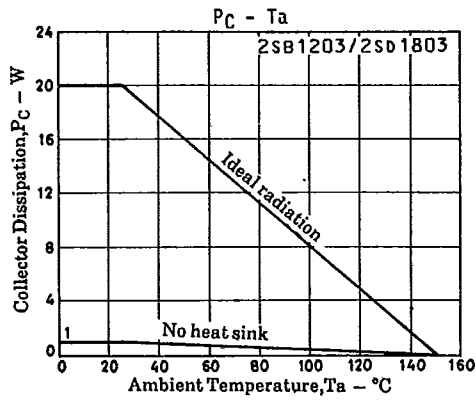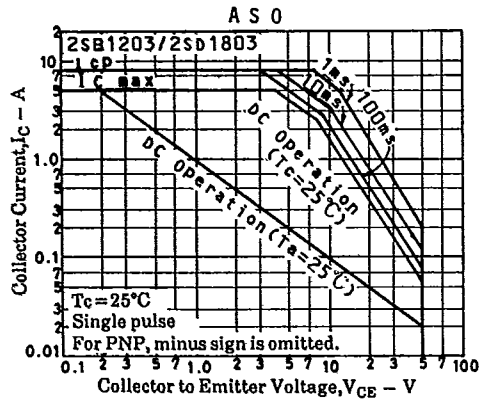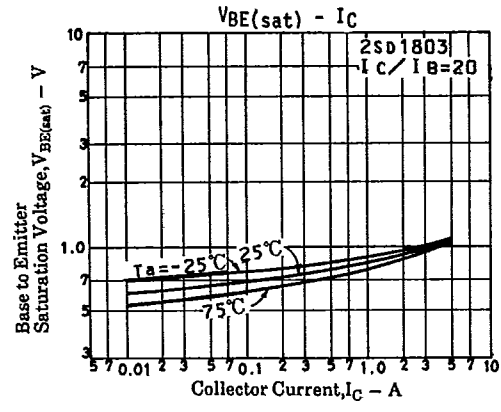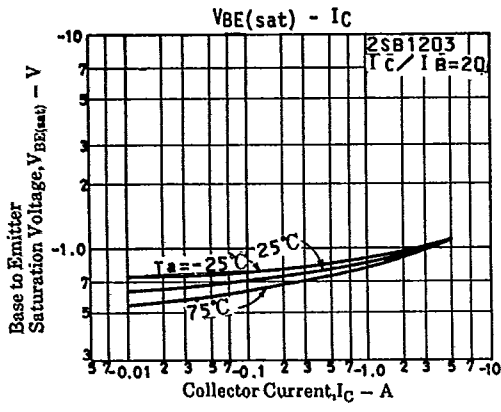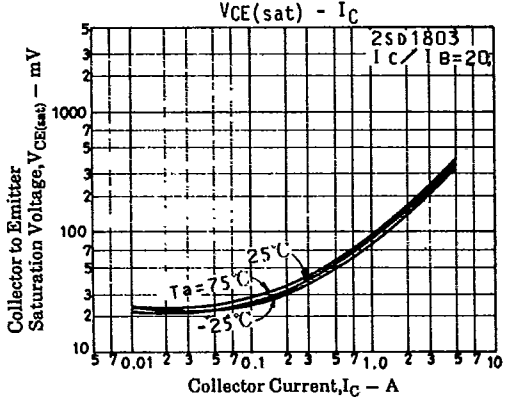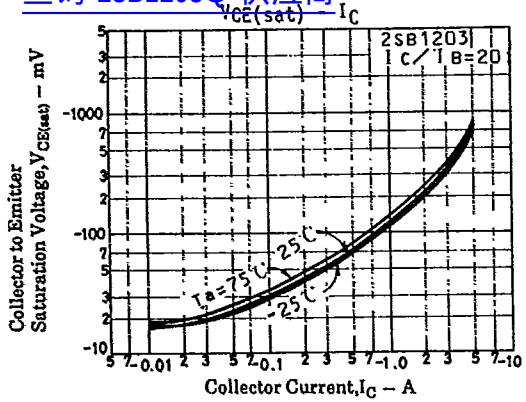


T-91-20

查询"2SB1203Q"供应商


CASE OUTLINES OF SURFACE MOUNT TRANSISTORS

- All of Sanyo surface mount transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.


Case Outline—[2018A] unit: mm




Case Outline—[2038] unit: mm

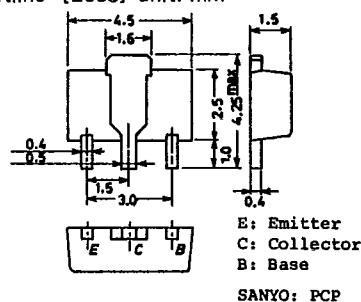


Case Outline—[2024A] unit: mm




Case Outline—[2044] unit: mm




Case Outline—[2028A] unit: mm




Case Outline—[2046] unit: mm



Case Outline—[2030A] unit: mm




Case Outline—[2050] unit: mm

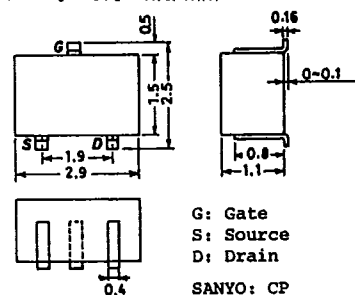


T-91-20

Case Outline—[2057] unit: mm


查询"2SB1203Q"供应商




Case Outline—[2066] unit: mm




Case Outline—[2058] unit: mm




Case Outline—[2067] unit: mm




Case Outline—[2059] unit: mm




Case Outline—[2068] unit: mm




Case Outline—[2062] unit: mm




Case Outline—[2069] unit: mm




Case Outline—[2065] unit: mm

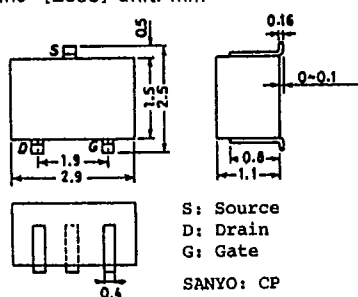

Case Outline—[2070] unit: mm




Case Outline—[2071] unit: mm

[查询"2SB1203D"供应商](#)

T-9120

Case Outline—[2072] unit: mm



Case Outline—[2073] unit: mm

