


● [查询"KTLP3521"供应商](#)

- 1. Compact dual-in-line Package.
- 2. 400V peak blocking voltage.
- 3. Isolation voltage between input and output
2500Vrms.


● Application :

- 1. TRIAC Driver.
- 2. Programmable Controllers.
- 3. AC-Output Module.
- 4. Solid State Relay.

● Outside Dimension : Unit (mm)

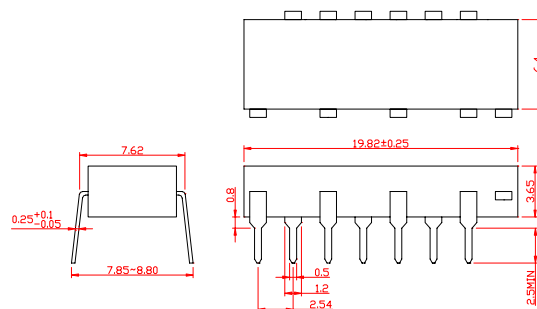

● Schematic : Top View



- 2 : Anode
- 3 : Cathode
- 4,5,6,7 : N.C
- 9,13 : TRIAC T2
- 11 : TRIAC T1
- 15 : TRIAC Gate

● Absolute Maximum Ratings : (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Input	Forward Current	I_F	50	mA
	Forward Current Derating ($T_a \geq 53^\circ\text{C}$)	$\Delta I_F/^\circ\text{C}$	-0.7	mA/ $^\circ\text{C}$
	Peak Forward Current (100 μs pulse, 100pps)	I_{FP}	1	A
	Reverse Voltage	V_R	5	V
	Junction Temperature	T_j	125	$^\circ\text{C}$
Output	Off-State Output Terminal Voltage	V_{DRM}	400	V
	On-State RMS Current	$I_{T(RMS)}$	1.0	A
	$T_a=40^\circ\text{C}$ $T_a=60^\circ\text{C}$		0.7	
	On-State Current Derating ($T_a \geq 40^\circ\text{C}$)	$\Delta I_T/^\circ\text{C}$	-14.3	mA/ $^\circ\text{C}$
	Peak Current from Snubber Circuit (100 μs pulse, 120pps)	I_{SP}	2	A
	Peak Nonrepetitive Surge Current (50Hz, Peak)	I_{TSM}	10	A
Junction Temperature		T_j	110	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-40~125	$^\circ\text{C}$
Operating Temperature Range		T_{opr}	-20~80	$^\circ\text{C}$
Lead Soldering Temperature (10s)		T_{sol}	260	$^\circ\text{C}$
Isolation Voltage (AC, 1min., R.H. $\leq 60\%$)		BV_S	2500	Vrms

● Electro-optical characteristics :

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input	Forward Voltage	V_F	$I_F=10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R=5\text{V}$	-	-	10	μA
	Capacitance	C_T	$V=0, f=1\text{MHz}$	-	30	-	pF
Output	Peak Off-State Current	I_{DRM}	$V_{DRM}=400\text{V}, T_a=110^\circ\text{C}$	-	-	100	μA
	Peak On-State Voltage	V_{TM}	$I_{TM}=1.5\text{A}$	-	-	3.0	V
	Holding Current	I_H	$R_L=100\Omega$	-	-	25	mA
	Critical Rate of Rise of Off-State Voltage	dv/dt	$V_{in}=120\text{Vrms}$	200	500	-	V/ μs
	Critical Rate of Rise of Commutating Voltage	$dv/dt(c)$	$V_{in}=120\text{Vrms}, I_T=1\text{Arms}$	-	5	-	V/ μs
Transfer	Trigger LED Current	I_{FT}	$V_T=6\text{V}$	-	-	10	mA
	Inhibit Voltage	V_{INH}	$I_F=\text{Rated } I_{FT}$	-	-	50	V
	Leakage in Inhibited State	I_{DRM2}	$I_F=\text{Rated } I_{FT}, V_T=\text{Rated } V_{DRM}$	-	200	-	μA
	Capacitance (Input to Output)	C_S	$V_S=0, f=1\text{MHz}$	-	1.5	-	pF
	Isolation Resistance	R_S	$V_S=500\text{V}$	5×10^{10}	10^{14}	-	Ω
	Isolation Voltage	BV_S	AC, 1minute	2500	-	-	Vrms
			AC, 1second, in oil	-	5000	-	
			DC, 1minute, in oil	-	5000	-	Vdc