

M31x Series Multiple Frequency VCXO

5x7 mm, 3.3/2.5/1.8 Volt, LVPECL/LVDS/CML/HCMOS Output



Features:


- Multiple Output Frequencies (2, 3, or 4) - Selectable
- **QiK Chip™** Technology
- Superior Jitter Performance (comparable to SAW based)
- Frequencies from 50 MHz - 1.4 GHz (LVDS/LVPECL/CML) and 10 - 150 MHz (CMOS)

Phase Lock Loop Applications:


- Where more than one selectable frequency is required for different global regions, FEC (Forward Error Correction) or selectable functionality are required.
- Telecommunications such as SONET / SDH / DWDM / FEC / SERDES / OC-3 thru OC-192
- Wireless base stations / WLAN / Gigabit Ethernet
- Avionic flight controls and military communications

Product Definition


	M31	x	x	-SXXX
Product Series				
Number of Frequencies				
2: Two Output				
3: Three Output				
4: Four Output				
Supply Voltage				
0: 3.3 V				
1: 2.5 V				
2: 1.8 V				
Factory Assigned to Accommodate Customer Specified Frequencies				

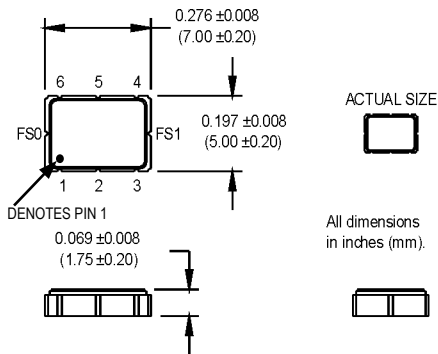

Pad1: Voltage Control
 Pad2: Enable/Disable (or N/C)
 Pad3: Ground
 Pad4: Output Q (LVPECL, LVDS, CML)
 Pad5: Output $\bar{Q}$ (LVPECL, LVDS, CML)
 Pad6: Vcc
 PadA: FS0
 PadB: FS1
 PadC: Do not connect!

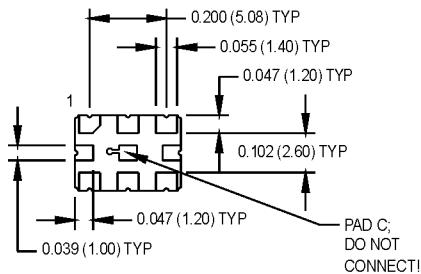

SUGGESTED SOLDER PAD LAYOUT

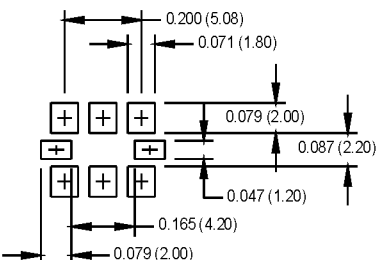

Frequency Select Truth Table		
	FS1	FS0
Frequency 1	High	High
Frequency 2	High	Low
Frequency 3	Low	High
Frequency 4	Low	Low


NOTE: Logic Low = 20% Vcc max.
 Logic High = 80% Vcc min.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.


Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

M31x Series Multiple Frequency VCXO


5x7 mm, 3.3/2.5/1.8 Volt, LVPECL/LVDS/CML/HCMOS Output



HCMOS Load Circuit

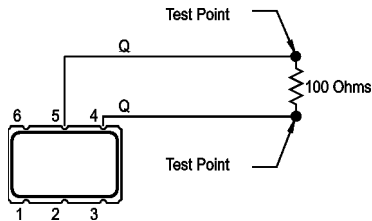

LVDS Load Circuit

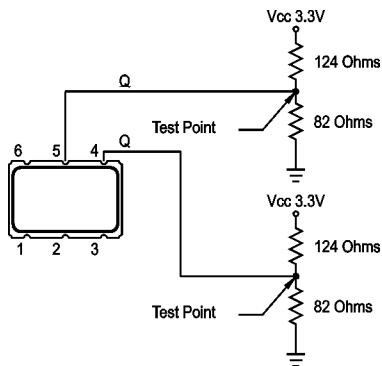


3.3 V LVPECL Load Circuit

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	150 10		1400 125	MHz MHz	See Note 1 LVPECL/LVDS/CML HCMOS
Operating Temperature	T _A	(See ordering information)				
Storage Temperature	T _S	-55		+125	°C	
Frequency Stability	ΔF/F		±25		ppm	
Aging 1st Year Thereafter (per year)		-3 -1		+3 +1	ppm ppm	
Pullability/APR		(See ordering information)				
Gain Transfer Function				90 135	ppm/V ppm/V	See Note 2 For ± 50 ppm APR For ± 100 ppm APR
Control Voltage	V _C	0.18 0.25 0.30	0.90 1.25 1.65	1.62 2.25 3.0	V V V	@ 1.8V V _{CC} @ 2.5V V _{CC} @ 3.3V V _{CC}
Linearity			1	5	%	Positive Monotonic
Modulation Bandwidth	f _m	20			KHz	-3 dB bandwidth
Input Impedance	Z _{in}	500k	1M		Ohms	@ DC
Supply Voltage	V _{CC}	1.71 2.375 3.135	1.8 2.5 3.3	1.89 2.625 3.465	V V V	
Input Current	I _{CC}			125 80	mA mA	LVPECL/LVDS/CML HCMOS
Load		50 Ohms to (V _{CC} - 2) V _{CC} 100 Ohm differential load				See Note 3 LVPECL Waveform LVDS/CML Waveform
				15	pF	CMOS Waveform
Symmetry (Duty Cycle)		45		55	%	@ 50% of waveform
Output Skew				80	ps	LVPECL
				20	ps	LVDS, CML
Differential Voltage		350	425 TBD	500	mV _{ppd}	LVDS CML
Common Mode Output Voltage	V _{CM}		1.2		V	LVDS
Logic "1" Level	V _{OH}	V _{CC} - 1.02			V	LVPECL
		90% V _{DD}				HCMOS
Logic "0" Level	V _{OL}			V _{CC} - 1.63	V	LVPECL
				10% V _{DD}		HCMOS
Rise/Fall Time	T _r /T _f		0.23	0.35	ns	@ 20/80% LVPECL
				6.0	ns	Ref. 10%-90% V _{DD} HCMOS
Enable Function		80% V _{CC} min. or N/C: output active 20% V _{CC} max: output disables to high-Z				Output Option B
		20% V _{CC} max: output active 80% V _{CC} min: output disables to high-Z				Output Option S
Frequency Selection		See Truth Table				
Settling Time				10	ms	To within ± 1 ppm of frequency
Start up Time			10		ms	
Phase Jitter @ 622.08 MHz @ 125 MHz	φ _J φ _J		0.50	1.0	ps RMS ps RMS	Integrated 12 kHz – 20 MHz HCMOS (12kHz – 20 MHz)

Note 1: Contact factory for exact frequency availability over 945 MHz.

Note 2: APR specification is inclusive of initial tolerance, deviation over temperature, shock, vibration, supply voltage, and aging for one year at 50°C mean ambient temperature.

Note 3: See Load Circuit Diagram in this Datasheet. Consult factory with nonstandard output load requirements.

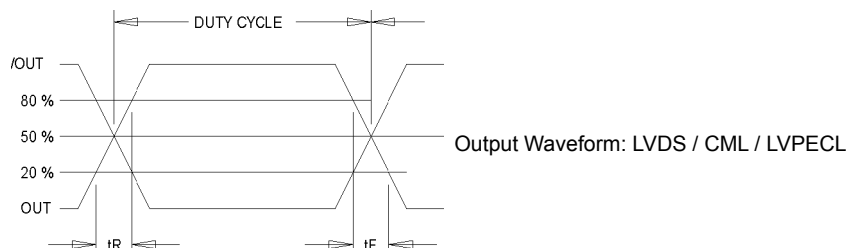

MtronPTI Lead Free Solder Profile

