

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE: 30 - 100 V  
CURRENT: 10 A


**FEATURES**

- ◇ High surge capacity.
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- ◇ Metal silicon junction, majority carrier conduction.
- ◇ High current capacity, low forward voltage drop.
- ◇ Guard ring for over voltage protection.

**MECHANICAL DATA**

- ◇ Case: JEDEC D<sup>2</sup>PAK, molded plastic body
- ◇ Terminals: Leads, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Position: Any
- ◇ Weight: 0.087 ounces, 2.2 gram

**D<sup>2</sup>PAK**

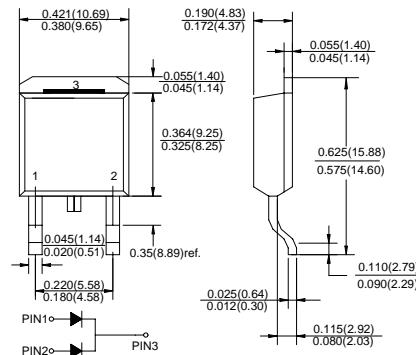

inch(mm)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

		MBRB 1030CT	MBRB 1035CT	MBRB 1040CT	MBRB 1045CT	MBRB 1050CT	MBRB 1060CT	MBRB 1090CT	MBRB 10100CT	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	30	35	40	45	50	60	90	100	V
Maximum RMS Voltage	$V_{RMS}$	21	25	28	32	35	42	63	70	V
Maximum DC blocking voltage	$V_{DC}$	30	35	40	45	50	60	90	100	V
Maximum average forward total device rectified current @ $T_c = 105^\circ\text{C}$	$I_{F(AV)}$	10								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	125								A
Maximum forward voltage (I <sub>F</sub> =5.0A, T <sub>c</sub> =125°C) (Note 1) (I <sub>F</sub> =5.0A, T <sub>c</sub> =25°C)	$V_F$	0.57 0.70 0.80 0.85								V
Maximum reverse current @ $T_c = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_c = 125^\circ\text{C}$	$I_R$	0.1 15 6.0 <sup>(3)</sup>								m A
Maximum thermal resistance (Note 2)	$R_{\theta JC}$	6.8								°C/W
Operating junction temperature range	$T_J$	-55 ---- + 150								°C
Storage temperature range	$T_{STG}$	-55 ---- + 150								°C

NOTE: 1. Pulse test: 300μs pulse width, 1% duty cycle.

www.galaxyen.com

2. Thermal resistance from junction to case.


3.  $T_c=100^\circ\text{C}$

# RATINGS AND CHARACTERISTIC CURVES


MBRB1030CT – MBRB10100CT

[查询"MBRB1030CT"供应商](#)


**FIG.1 – PEAK FORWARD SURGE CURRENT**

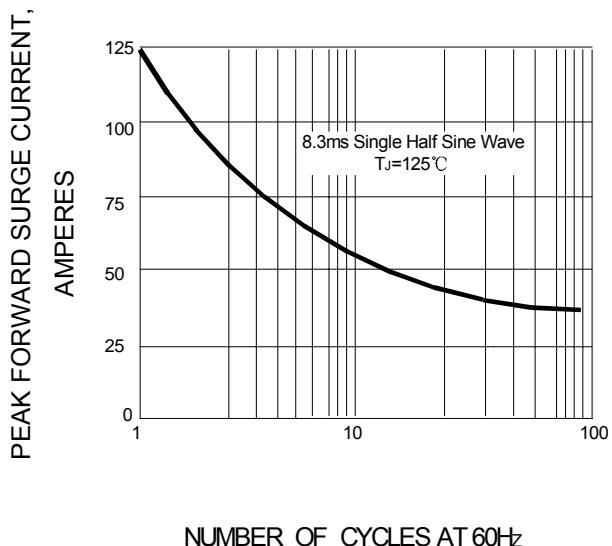

**FIG.2 – FORWARD DERATING CURVE**

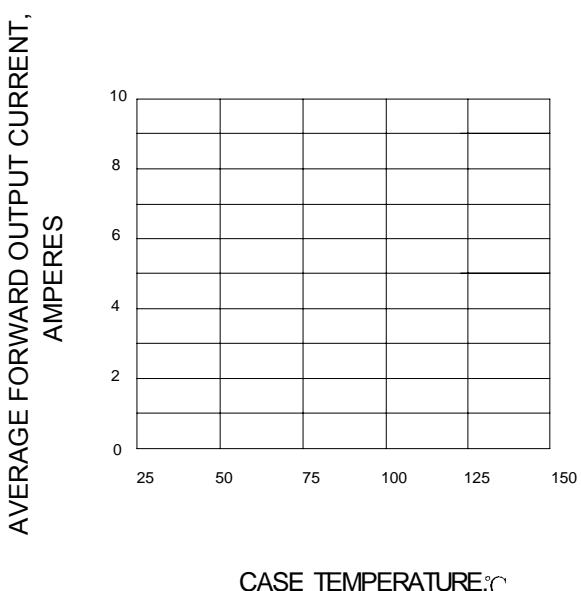

**FIG.3 – TYPICAL FORWARD CHARACTERISTIC**

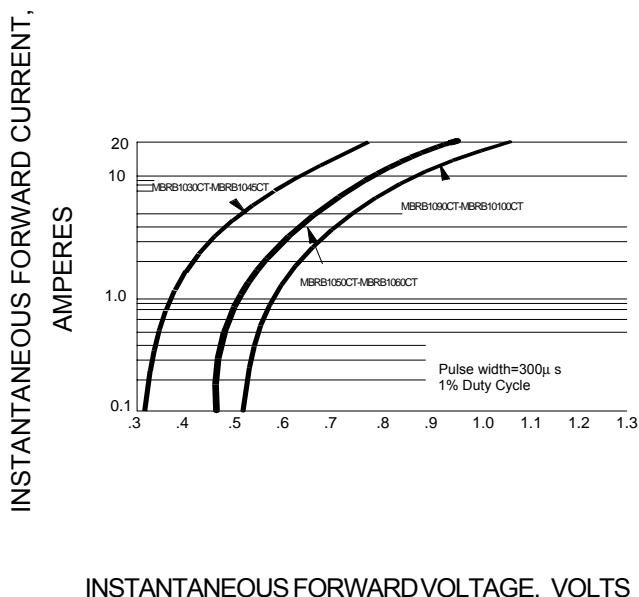

**FIG.4 – TYPICAL REVERSE CHARACTERISTIC**

