
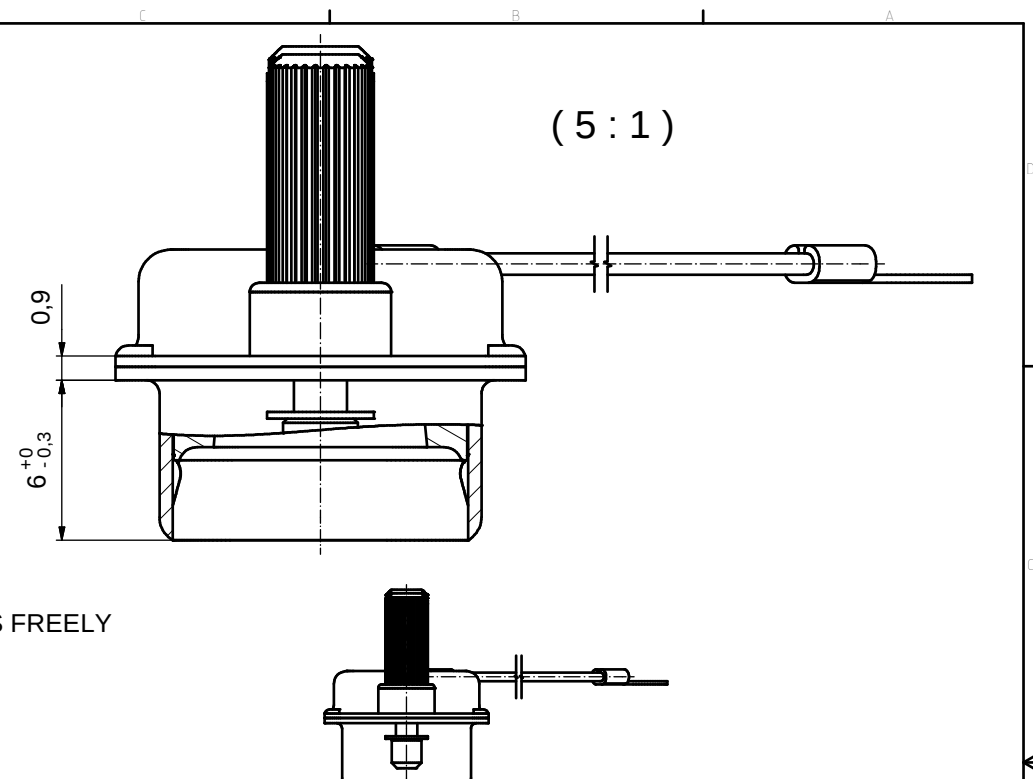


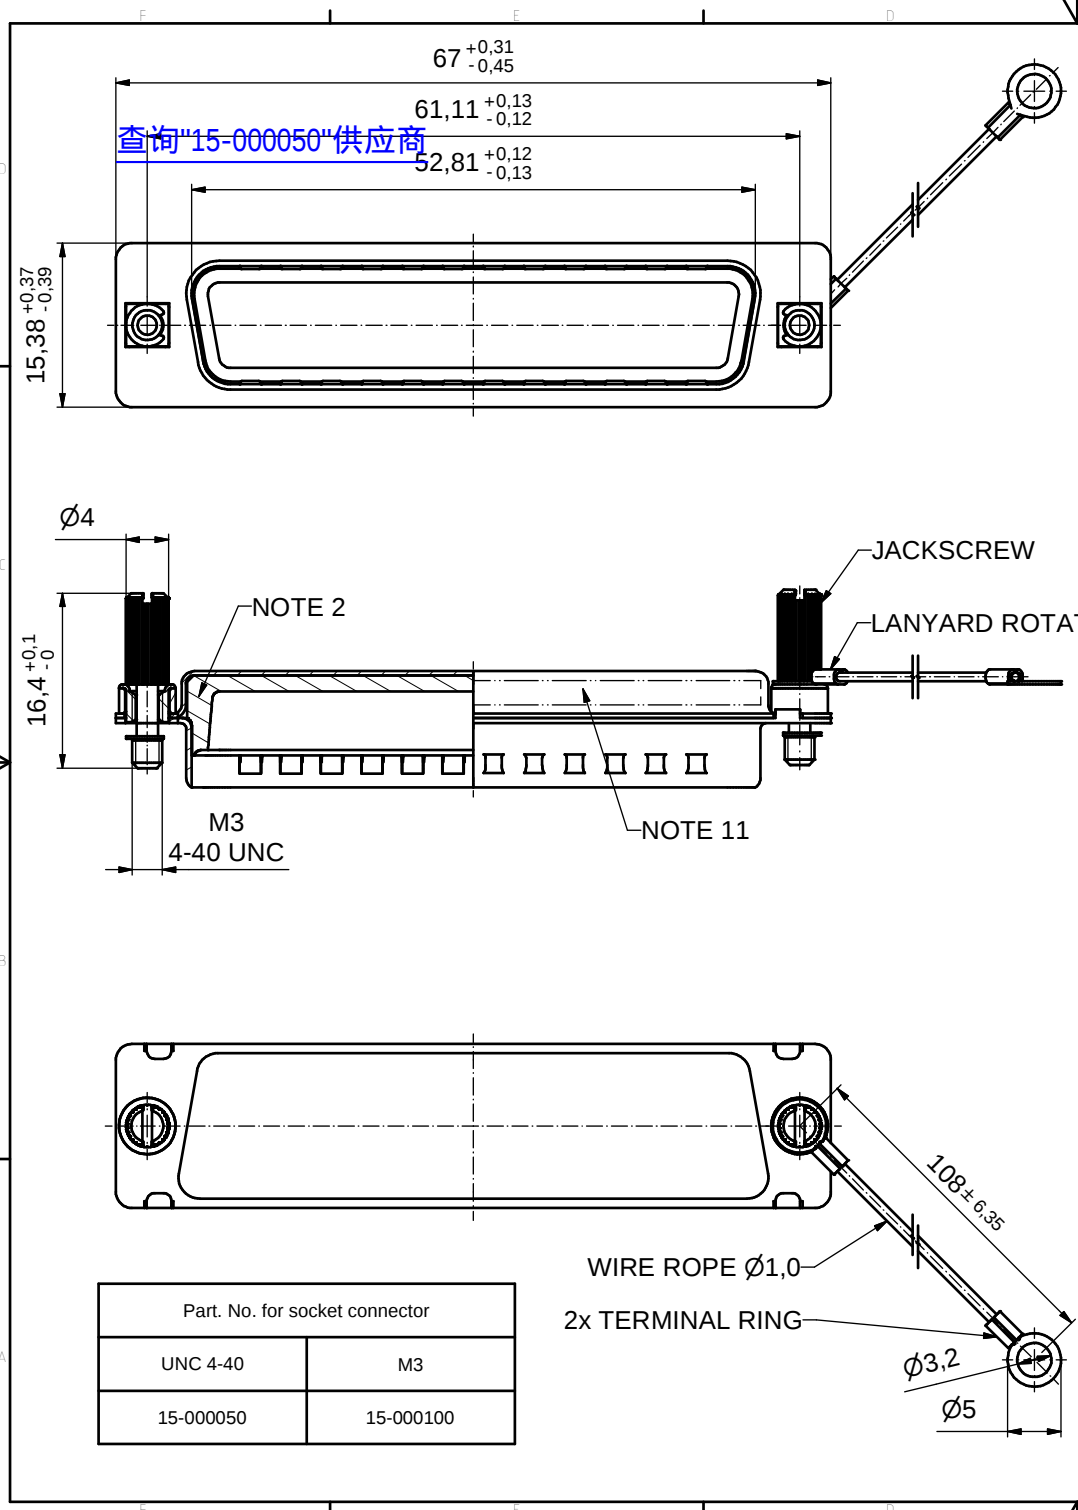

- NOTES:
- 1. METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
 - 2. TPE ETHYLENE PROPYLENE THERMOPLASTIC RUBBER SEAL
 - 3. IP RATING: THE WATER RESISTANT CAP MUST BE MOUNTED PROPERLY TO THE MATING CONNECTOR FOR IP 67
 - 4. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
 - 5. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
 - 6. JACKSCREW: STAINLESS STEEL 1.4305
 - 7. WIRE ROPE: STAINLESS STEEL 1.4401
 - 8. RETAINING WASHER: STAINLESS STEEL 1.4122
 - 9. TERMINAL RING: UNINSULATED, COPPER ALLOY; min. 200µinTIN over 80µin NICKEL
 - 10. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
 - 11. CONNECTOR IS PART MARKED: [PART NO. CONEC ABC]

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND										tolerance ISO 2768-m		 dim. in mm	scale: 2:1 (5:1)						
													material: SEE NOTES						
															date	name	title: WATER RESISTANT SCREEN CAP 50pos. FOR SOCKET CONNECTOR with threaded insert, jackscrew and wire rope		
														drawn	23.05.08	Petker			
														appd.	26.05.08	Fischer			
				norm				dwg no: Inventor 10 DIN-A3 sh: 1											
				d-old															
a	Origin						15K1A224												
rev.	description	date	name																
							part no: see table												