

CT10 Series Molded Sensors




CT10 SERIES MOLDED SENSORS

The CT10 series is a reed-based proximity sensor activated by the presence of a magnetic field. It is designed for SMD mounting.


SERIES FEATURES

- Ideal for SMD pick-and-place
- Rugged encapsulation
- Excellent lifetime and reliability
- Gold and sputtered ruthenium contact layers
- Tape and Reel packaging
- Sample applications include laptop covers, security system sensors, electric gas metering, fluid flow sensors, and level sensors


CT10-XXXX-G2

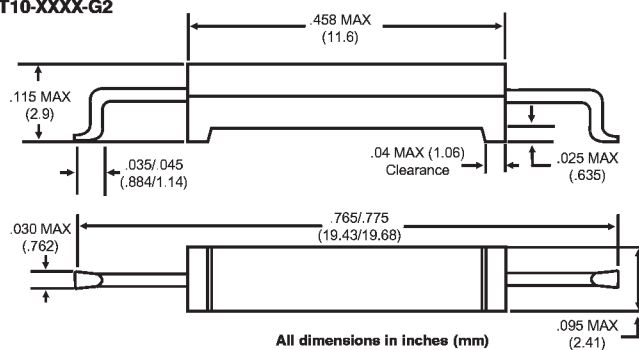

CT10-XXXX-A1

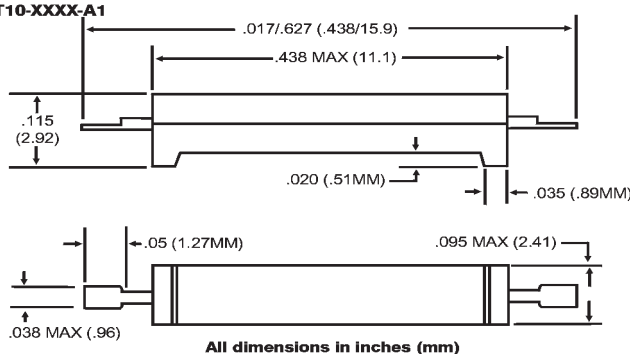

CT10-XXXX-G1

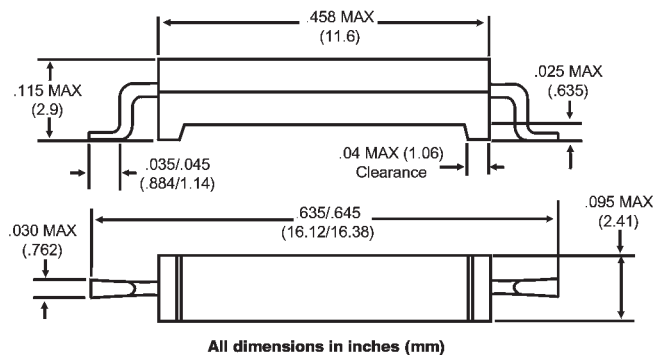


CT10 SERIES MOLDED SENSORS

[查询CT10 供应商](#)


Electrical Characteristics				
Parameters	Units	CT10-XXXX-G1	CT10-XXXX-G2	CT10-XXXX-A1
Operate Range *	AT	10-40	10-30	10-40
Release Range *	AT	n.d.	n.d.	n.d.
Switched Power (max)	VA	10	10	10
Switched Current (max)	mA	500	500	500
Switched Voltage (max)	VDC	200	200	200
Switched Voltage (max)	VAC	140	140	140
Breakdown Voltage (min)	VDC	230	230	230
Contact Resistance (max)	mΩ	115	115	115
Insulation Resistance (min)	MΩ	1 x 10 ⁶	1 x 10 ⁶	1 x 10 ⁶

*Measured in 10jk coil after Modification

TAPE & REEL

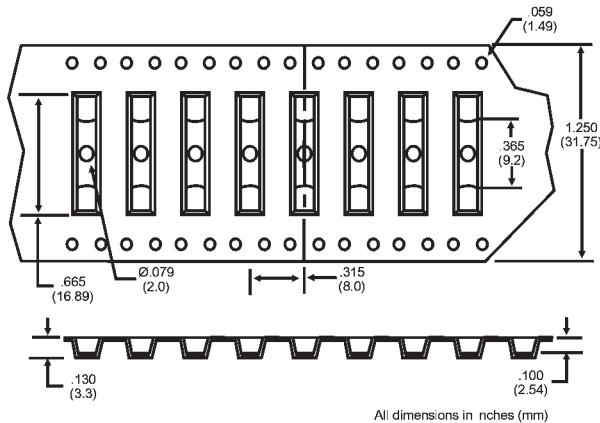

CT10-XXXX-G1 / CT10-XXXX-A1

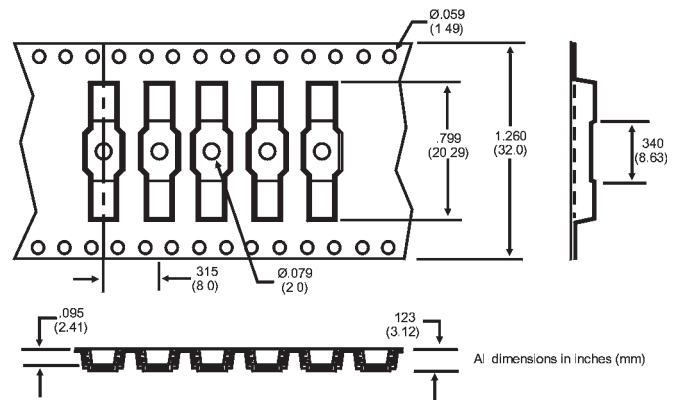

CT10-XXXX-G2

Ordering Information

CTXX-XXXX-XX		Lead Configuration Subset:
Coto Technology		For Gull wing:
Raw Switch Glass		1 - 0.640" overall length
Length (rounded down to the next whole mm)		2 - 0.770" overall length
Lower AT Value		For Axial:
(after mold and lead form)		1 - 0.622" overall length
Upper AT Value		Lead Configuration:
(after mold and lead form)		G - Gull wing
		A - Axial

USA

55 DuPont Drive • Providence RI 02907 USA
401-943-COTO (2686) • FAX: 401-942-0920

The Netherlands

Jan Campertstraat 5 • 6416 SG Heerlen
Tel: +31 45 5439345 • FAX: +31 45 5427216