

SK 25 DGDL 126 T

查询"SK25DGDL126T"供应商



SEMISTOP® 4

3-phase bridge rectifier +
brake chopper + 3-phase
bridge inverter

SK 25 DGDL 126 T

Target Data


Features

- One screw mounting module
- Fully compatible with SEMISTOP®1,2,3
- Improved thermal performances by aluminium oxide substrate
- Trench IGBT technology
- CAL technology free-wheeling diode
- Integrated NTC temperature sensor

Typical Applications

- Inverter up to 16 kVA
- Typ. motor power 7,5 kW

1) $V_{CE,sat}$, V_F = chip level value








DGDL - T





Absolute Maximum Ratings		Ts = 25 °C, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Inverter,Chopper			
V_{CES}	$T_s = 25 (70) ^\circ C$	1200	V
I_C	$I_{CRM} = 2 \times I_{Cnom}$, $t_p = 1 \text{ ms}$	41 (31)	A
I_{CRM}		50	A
V_{GES}		± 20	V
T_j		-40 ... +150	$^\circ C$
Diode - Inverter,Chopper			
I_F	$T_s = 25 (70) ^\circ C$	30 (22)	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$, $t_p = 1 \text{ ms}$	50	A
T_j		-40 ... +150	$^\circ C$
Rectifier			
V_{RRM}	$T_s = 70 ^\circ C$	1600	V
I_F	$t_p = 10 \text{ ms}$, $\sin 180^\circ$, $T_j = 25 ^\circ C$	35	A
I_{FSM} / I_{TSM}	$t_p = 10 \text{ ms}$, $\sin 180^\circ$, $T_j = 25 ^\circ C$	370	A
I_t^2		680	A ² s
T_j		-40 ... +150	$^\circ C$
T_{sol}	Terminals, 10 s	260	$^\circ C$
T_{stg}		-40 ... +125	$^\circ C$
V_{isol}	AC, 1 min. / 1 s	2500 / 3000	V


Characteristics		Ts = 25 °C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT - Inverter					
V_{CEsat}	$I_C = 25 \text{ A}$, $T_j = 25 (125) ^\circ C$		1,7 (2)	2,1 (2,4)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 1 \text{ mA}$	5	5,8	6,5	V
$V_{CE(TO)}$	$T_j = 25 ^\circ C (125) ^\circ C$		1 (0,9)	1,2 (1,1)	V
r_T	$T_j = 25 ^\circ C (125) ^\circ C$		28 (44)	36 (52)	m Ω
C_{ies}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		1,8		nF
C_{oes}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		0,095		nF
C_{res}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		0,082		nF
$R_{th(j-s)}$	per IGBT		0,9		K/W
$t_{d(on)}$	under following conditions		82		ns
t_r	$V_{CC} = 600 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$		21		ns
$t_{d(off)}$	$I_C = 25 \text{ A}$, $T_j = 125 ^\circ C$		426		ns
t_f	$R_{Gon} = R_{Goff} = 16 \Omega$		78		ns
E_{on}	inductive load		2,8		mJ
E_{off}			3,1		mJ
Diode - Inverter,Chopper					
$V_F = V_{EC}$	$I_F = 20 \text{ A}$, $T_j = 25 (125) ^\circ C$		1,5 (1,55)	1,65 (1,7)	V
$V_{(TO)}$	$T_j = 25 ^\circ C (125) ^\circ C$		1,15 (1,1)	1,25 (1,2)	V
r_T	$T_j = 25 ^\circ C (125) ^\circ C$		17,5 (22,5)	20 (25)	m Ω
$R_{th(j-s)}$	per diode		1,7		K/W
I_{RRM}	under following conditions		25		A
Q_{rr}	$I_F = 25 \text{ A}$, $V_R = 300 \text{ V}$		5		μC
E_{rr}	$V_{GE} = 0 \text{ V}$, $T_j = 125 ^\circ C$		2		mJ
	$di_F/dt = 2100 \text{ A}/\mu s$				
Diode - Rectifier					
V_F	$I_F = 25 \text{ A}$, $T_j = 25 ^\circ C$		1,1		V
$V_{(TO)}$	$T_j = 150 ^\circ C$		0,8		V
r_T	$T_j = 150 ^\circ C$		13		m Ω
$R_{th(j-s)}$	per diode		1,25		K/W
Temperatur sensor					
R_{ts}	5 %, $T_r = 25 (100) ^\circ C$		5000(493)		Ω
Mechanical data					
w			60		g
M_s	Mounting torque		3,5		Nm

查询"SK25DGD L126T"供应商

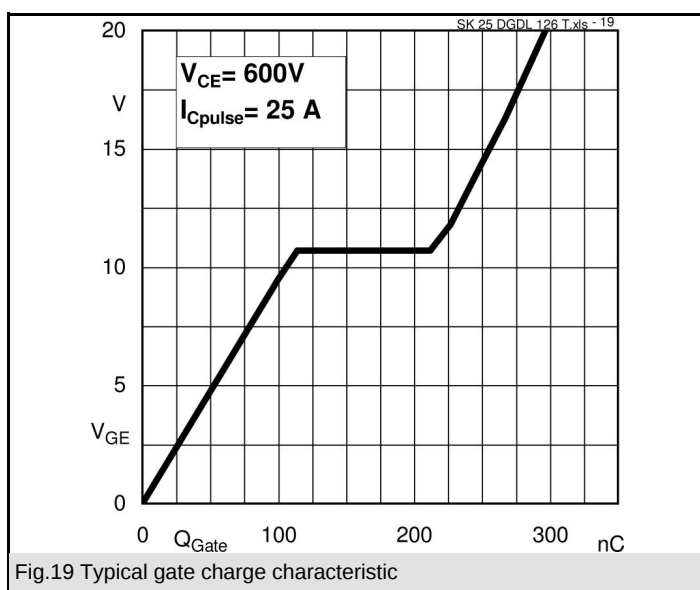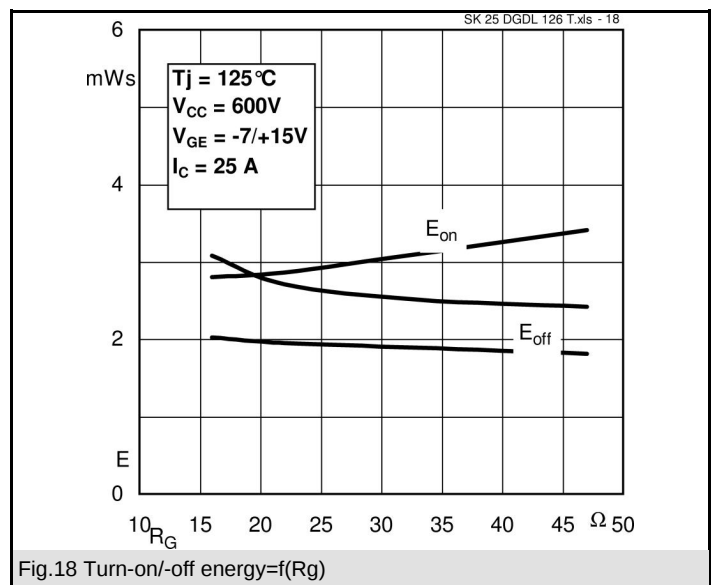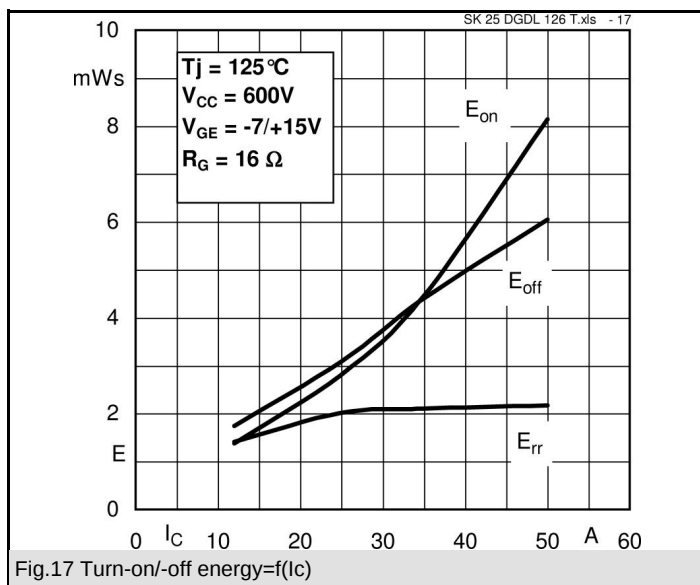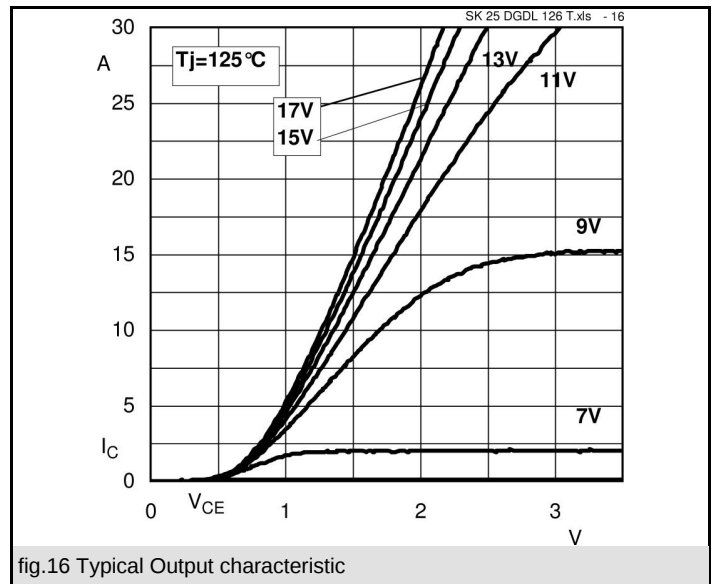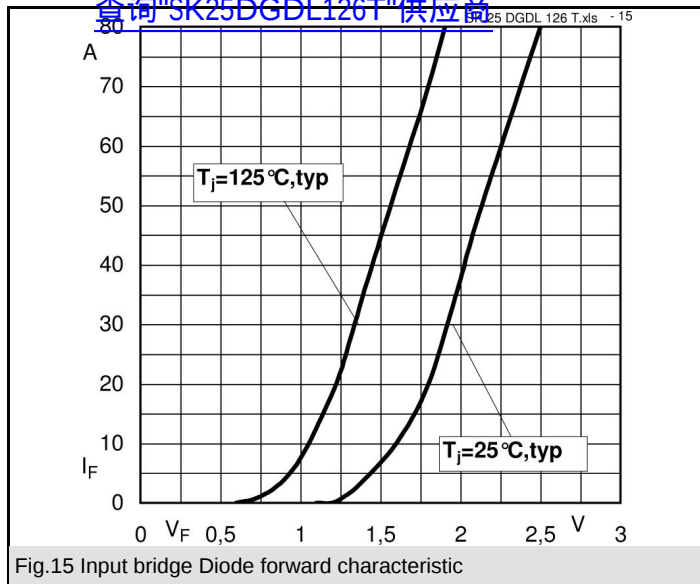


查询"SK25DGDL126T"供应商

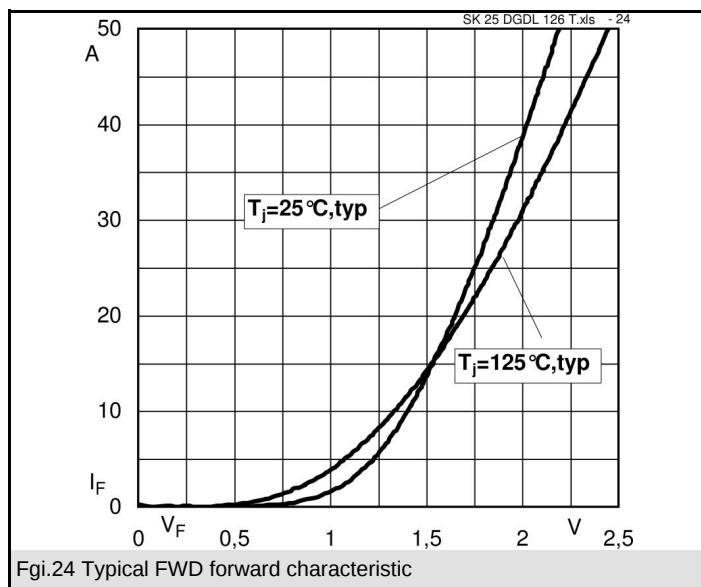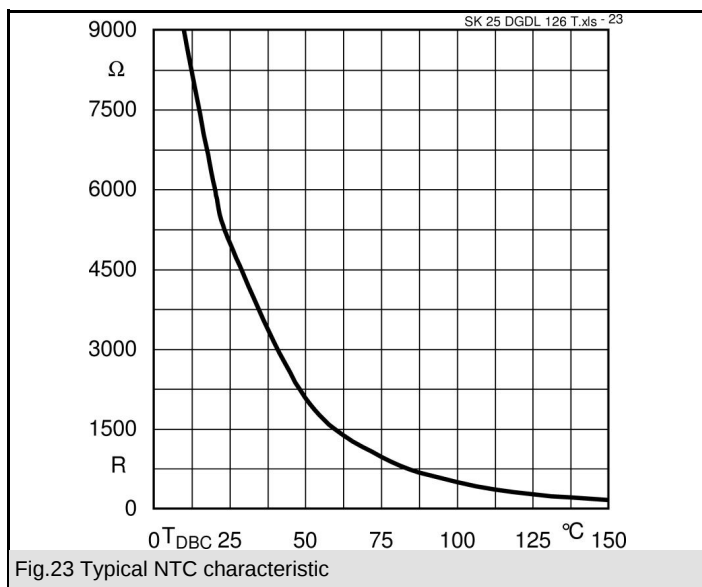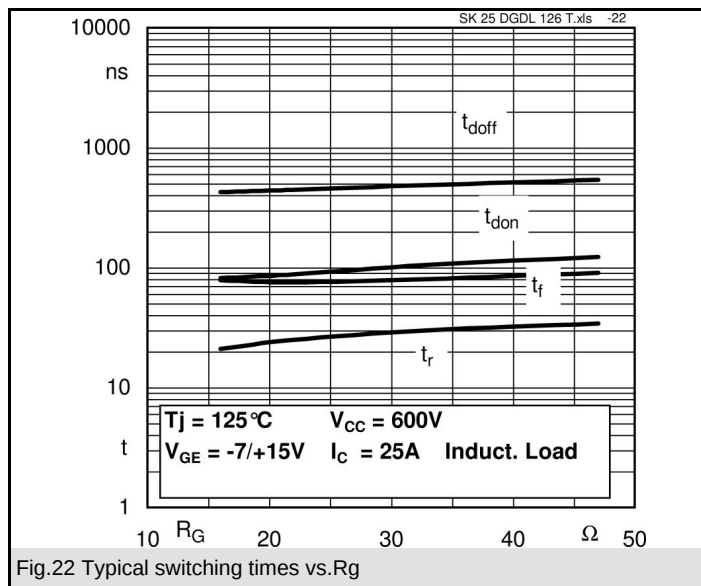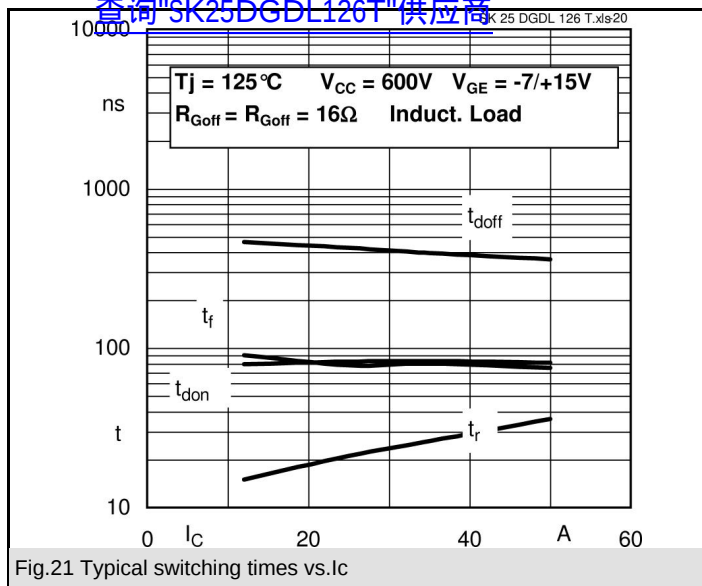

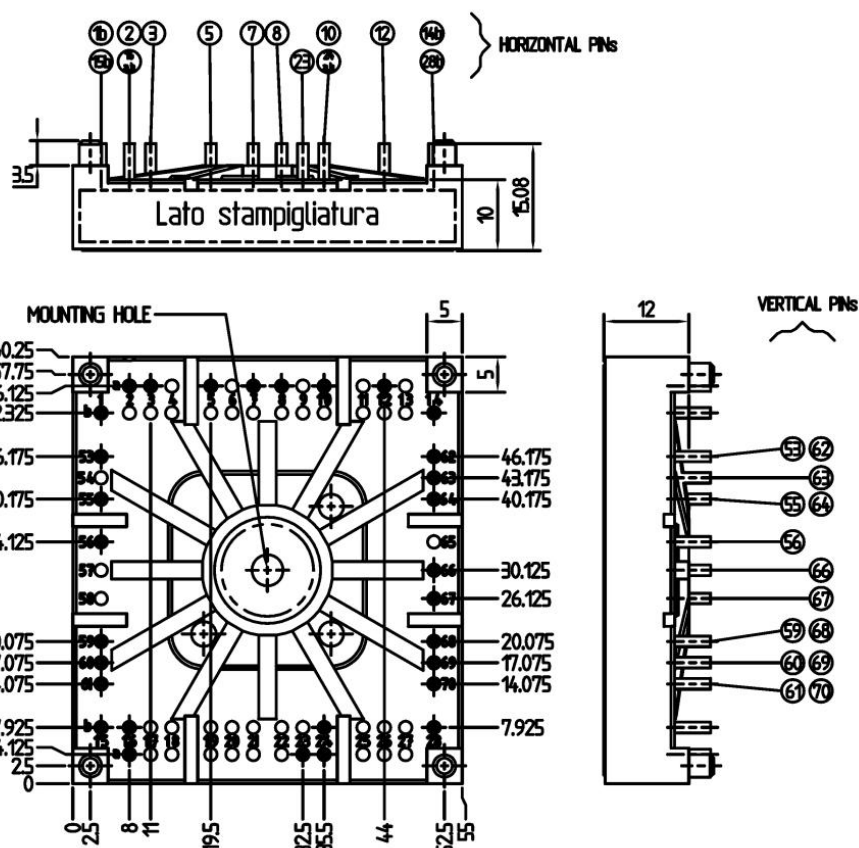

Case T 75 (Suggested hole diameter for the solder pins in the circuit board: 2mm. Suggested hole diameter for the mounting pins in the circuit board: 3,6mm)

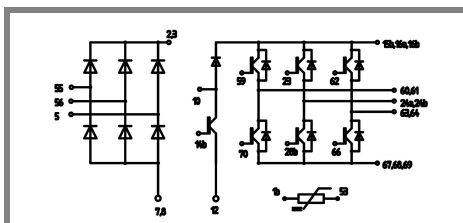

Case T 75 (pin without letter refers to row "a", unless otherwise specified)

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.