


$V_{CE} = 3300 \text{ V}$
[查询"5SNA1200G3301"供应商](#)
 $I_C = 1200 \text{ A}$

ABB HiPak™

IGBT Module 5SNA 1200G330100

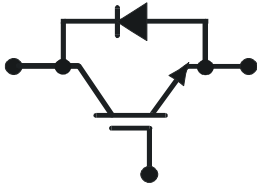

Doc. No. 5SYA1563-00 Apr.06

- Low-loss, rugged SPT chip-set
- Smooth switching SPT chip-set for good EMC
- High insulation package
- High power density
- AISiC base-plate for high power cycling capability
- AlN substrate for low thermal resistance



Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | max | Unit |
|--------------------------------|--------------|--|-----|-------|---------------|
| Collector-emitter voltage | V_{CES} | $V_{GE} = 0 \text{ V}$ | | 3300 | V |
| DC collector current | I_C | $T_c = 80 \text{ °C}$ | | 1200 | A |
| Peak collector current | I_{CM} | $t_p = 1 \text{ ms}, T_c = 80 \text{ °C}$ | | 2400 | A |
| Gate-emitter voltage | V_{GES} | | -20 | 20 | V |
| Total power dissipation | P_{tot} | $T_c = 25 \text{ °C}$, per switch (IGBT) | | 11750 | W |
| DC forward current | I_F | | | 1200 | A |
| Peak forward current | I_{FRM} | | | 2400 | A |
| Surge current | I_{FSM} | $V_R = 0 \text{ V}, T_{vj} = 125 \text{ °C}$, $t_p = 10 \text{ ms}$, half-sinewave | | 14000 | A |
| IGBT short circuit SOA | t_{psc} | $V_{CC} = 2500 \text{ V}, V_{CEMCHIP} \leq 3300 \text{ V}$ $V_{GE} \leq 15 \text{ V}, T_{vj} \leq 125 \text{ °C}$ | | 10 | μs |
| Isolation voltage | V_{isol} | 1 min, $f = 50 \text{ Hz}$ | | 10200 | V |
| Junction temperature | T_{vj} | | | 125 | °C |
| Junction operating temperature | $T_{vj(op)}$ | | -40 | 125 | °C |
| Case temperature | T_c | | -40 | 125 | °C |
| Storage temperature | T_{stg} | | -40 | 125 | °C |
| Mounting torques ²⁾ | M_s | Base-heatsink, M6 screws | 4 | 6 | Nm |
| | M_{t1} | Main terminals, M8 screws | 8 | 10 | |
| | M_{t2} | Auxiliary terminals, M4 screws | 2 | 3 | |

¹⁾ Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747

²⁾ For detailed mounting instructions refer to ABB Document No. 5SYA2039

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



查询"5SNA1200G3301"供应商
IGBT characteristic values³⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|--|-------------------------|---|------|---|-----|---------------|
| Collector (-emitter) breakdown voltage | $V_{(BR)CES}$ | $V_{GE} = 0 \text{ V}, I_C = 10 \text{ mA}, T_{vj} = 25 \text{ }^\circ\text{C}$ | 3300 | | | V |
| Collector-emitter ⁴⁾ saturation voltage | $V_{CE \text{ sat}}$ | $I_C = 1200 \text{ A}, V_{GE} = 15 \text{ V}$ | | 3.1 | | V |
| | | $T_{vj} = 25 \text{ }^\circ\text{C}$ | | | | V |
| | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 3.5 | 3.85 | 4.3 | V |
| Collector cut-off current | I_{CES} | $V_{CE} = 3300 \text{ V}, V_{GE} = 0 \text{ V}$ | | | 12 | mA |
| | | $T_{vj} = 25 \text{ }^\circ\text{C}$ | | | | mA |
| | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | | | 120 | mA |
| Gate leakage current | I_{GES} | $V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}, T_{vj} = 125 \text{ }^\circ\text{C}$ | -500 | | 500 | nA |
| Gate-emitter threshold voltage | $V_{GE(TO)}$ | $I_C = 240 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25 \text{ }^\circ\text{C}$ | 5.5 | | 7.5 | V |
| Gate charge | Q_{ge} | $I_C = 1200 \text{ A}, V_{CE} = 1800 \text{ V}, V_{GE} = -15 \text{ V} \dots 15 \text{ V}$ | | 10.9 | | μC |
| Input capacitance | C_{ies} | $V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 1 \text{ MHz}, T_{vj} = 25 \text{ }^\circ\text{C}$ | | 187 | | nF |
| Output capacitance | C_{oes} | | | 11.6 | | |
| Reverse transfer capacitance | C_{res} | | | 2.22 | | |
| Turn-on delay time | $t_{d(on)}$ | $V_{CC} = 1800 \text{ V}, I_C = 1200 \text{ A}, R_G = 1.5 \text{ } \Omega,$ | | $T_{vj} = 25 \text{ }^\circ\text{C}$ $T_{vj} = 125 \text{ }^\circ\text{C}$ | | ns |
| | | | | 530 | | |
| Rise time | t_r | $V_{GE} = \pm 15 \text{ V}, L_\sigma = 125 \text{ nH}, \text{ inductive load}$ | | $T_{vj} = 25 \text{ }^\circ\text{C}$ $T_{vj} = 125 \text{ }^\circ\text{C}$ | | ns |
| | | | | 230 | | |
| Turn-off delay time | $t_{d(off)}$ | $V_{CC} = 1800 \text{ V}, I_C = 1200 \text{ A}, R_G = 1.5 \text{ } \Omega,$ | | $T_{vj} = 25 \text{ }^\circ\text{C}$ $T_{vj} = 125 \text{ }^\circ\text{C}$ | | ns |
| | | | | 1200 | | |
| Fall time | t_f | $V_{GE} = \pm 15 \text{ V}, L_\sigma = 125 \text{ nH}, \text{ inductive load}$ | | $T_{vj} = 25 \text{ }^\circ\text{C}$ $T_{vj} = 125 \text{ }^\circ\text{C}$ | | ns |
| | | | | 1330 | | |
| Turn-on switching energy | E_{on} | $V_{CC} = 1800 \text{ V}, I_C = 1200 \text{ A}, V_{GE} = \pm 15 \text{ V}, R_G = 1.5 \text{ } \Omega, L_\sigma = 125 \text{ nH}, \text{ inductive load}$ | | $T_{vj} = 25 \text{ }^\circ\text{C}$ $T_{vj} = 125 \text{ }^\circ\text{C}$ | | mJ |
| | | | | 1260 | | |
| Turn-off switching energy | E_{off} | $V_{CC} = 1800 \text{ V}, I_C = 1200 \text{ A}, V_{GE} = \pm 15 \text{ V}, R_G = 1.5 \text{ } \Omega, L_\sigma = 125 \text{ nH}, \text{ inductive load}$ | | $T_{vj} = 25 \text{ }^\circ\text{C}$ $T_{vj} = 125 \text{ }^\circ\text{C}$ | | mJ |
| | | | | 1340 | | |
| Short circuit current | I_{SC} | $t_{psc} \leq 10 \text{ } \mu\text{s}, V_{GE} = 15 \text{ V}, T_{vj} = 125 \text{ }^\circ\text{C}, V_{CC} = 2500 \text{ V}, V_{CEM \text{ CHIP}} \leq 3300 \text{ V}$ | | 5100 | | A |
| Module stray inductance | $L_{\sigma \text{ CE}}$ | | | 18 | | nH |
| Resistance, terminal-chip | $R_{CC'+EE'}$ | | | $T_C = 25 \text{ }^\circ\text{C}$ $T_C = 125 \text{ }^\circ\text{C}$ | | m Ω |
| | | | | 0.07 | | |
| | | | | 0.1 | | |

³⁾ Characteristic values according to IEC 60747 – 9

⁴⁾ Collector-emitter saturation voltage is given at chip level

查询"5SNA1200G3301"供应商
Diode characteristic values⁵⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-------------------------------|-----------|---|---------------------------|------|------|---------------|
| Forward voltage ⁶⁾ | V_F | $I_F = 1200 \text{ A}$ | $T_{vj} = 25 \text{ °C}$ | 2.3 | | V |
| | | | $T_{vj} = 125 \text{ °C}$ | 2.0 | 2.35 | |
| Reverse recovery current | I_{rr} | $V_{CC} = 1800 \text{ V},$ $I_F = 1200 \text{ A},$ $V_{GE} = \pm 15 \text{ V},$ $R_G = 1.5 \text{ } \Omega$ $L_{\sigma} = 125 \text{ nH}$ inductive load | $T_{vj} = 25 \text{ °C}$ | 1090 | | A |
| | | | $T_{vj} = 125 \text{ °C}$ | 1420 | | |
| Recovered charge | Q_{rr} | $V_{CC} = 1800 \text{ V},$ $I_F = 1200 \text{ A},$ $V_{GE} = \pm 15 \text{ V},$ $R_G = 1.5 \text{ } \Omega$ $L_{\sigma} = 125 \text{ nH}$ inductive load | $T_{vj} = 25 \text{ °C}$ | 710 | | μC |
| | | | $T_{vj} = 125 \text{ °C}$ | 1300 | | |
| Reverse recovery time | t_{rr} | $V_{CC} = 1800 \text{ V},$ $I_F = 1200 \text{ A},$ $V_{GE} = \pm 15 \text{ V},$ $R_G = 1.5 \text{ } \Omega$ $L_{\sigma} = 125 \text{ nH}$ inductive load | $T_{vj} = 25 \text{ °C}$ | 560 | | ns |
| | | | $T_{vj} = 125 \text{ °C}$ | 1280 | | |
| Reverse recovery energy | E_{rec} | $V_{CC} = 1800 \text{ V},$ $I_F = 1200 \text{ A},$ $V_{GE} = \pm 15 \text{ V},$ $R_G = 1.5 \text{ } \Omega$ $L_{\sigma} = 125 \text{ nH}$ inductive load | $T_{vj} = 25 \text{ °C}$ | 880 | | mJ |
| | | | $T_{vj} = 125 \text{ °C}$ | 1670 | | |

⁵⁾ Characteristic values according to IEC 60747 – 2

⁶⁾ Forward voltage is given at chip level

Package properties⁷⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---|--------------------|---|------|------------|--------|------|
| IGBT thermal resistance junction to case | $R_{th(j-c)IGBT}$ | | | | 0.0085 | K/W |
| Diode thermal resistance junction to case | $R_{th(j-c)DIODE}$ | | | | 0.017 | K/W |
| IGBT thermal resistance ²⁾ case to heatsink | $R_{th(c-s)IGBT}$ | IGBT per switch, λ grease = $1\text{W}/\text{m}^2 \text{ K}$ | | 0.009 | | K/W |
| Diode thermal resistance ⁷⁾ case to heatsink | $R_{th(c-s)DIODE}$ | Diode per switch, λ grease = $1\text{W}/\text{m}^2 \text{ K}$ | | 0.018 | | K/W |
| Partial discharge extinction voltage | V_e | $f = 50 \text{ Hz}, Q_{PD} \leq 10\text{pC}$ (acc. to IEC 61287) | 5100 | | | V |
| Comparative tracking index | CTI | | | ≥ 600 | | |


²⁾ For detailed mounting instructions refer to ABB Document No. 5SYA2039

Mechanical properties⁷⁾


| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---------------------------|-----------------------|---|----------------|------|-----|------|
| Dimensions | $L \times W \times H$ | Typical, see outline drawing | 190 × 140 × 48 | | | mm |
| Clearance distance in air | d_a | according to IEC 60664-1 and EN 50124-1 | Term. to base: | 40 | | mm |
| | | | Term. to term: | 26 | | |
| Surface creepage distance | d_s | according to IEC 60664-1 and EN 50124-1 | Term. to base: | 64 | | mm |
| | | | Term. to term: | 56 | | |
| Mass | m | | | 1760 | | g |

⁷⁾ Package and mechanical properties according to IEC 60747 – 15

查询"5SNA1200G3301"供应商
Electrical configuration

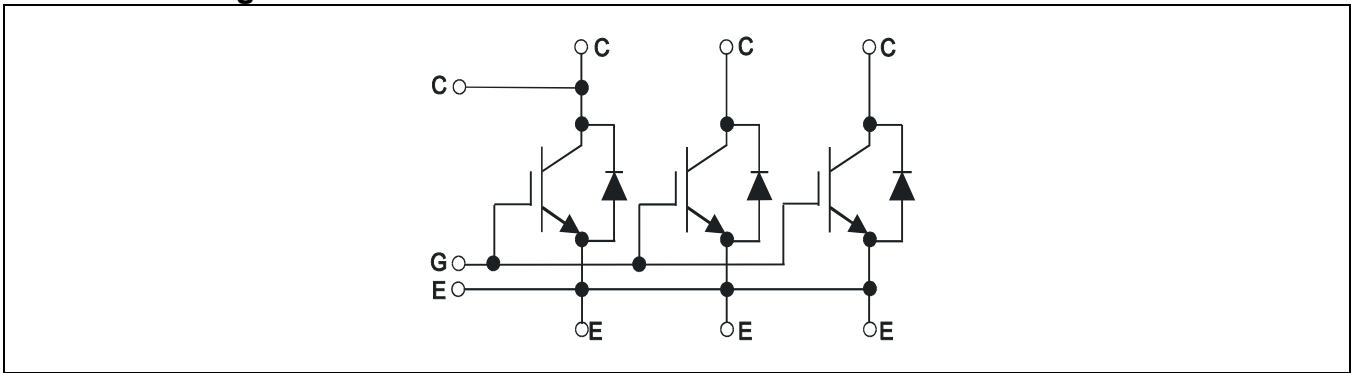

Outline drawing ²⁾

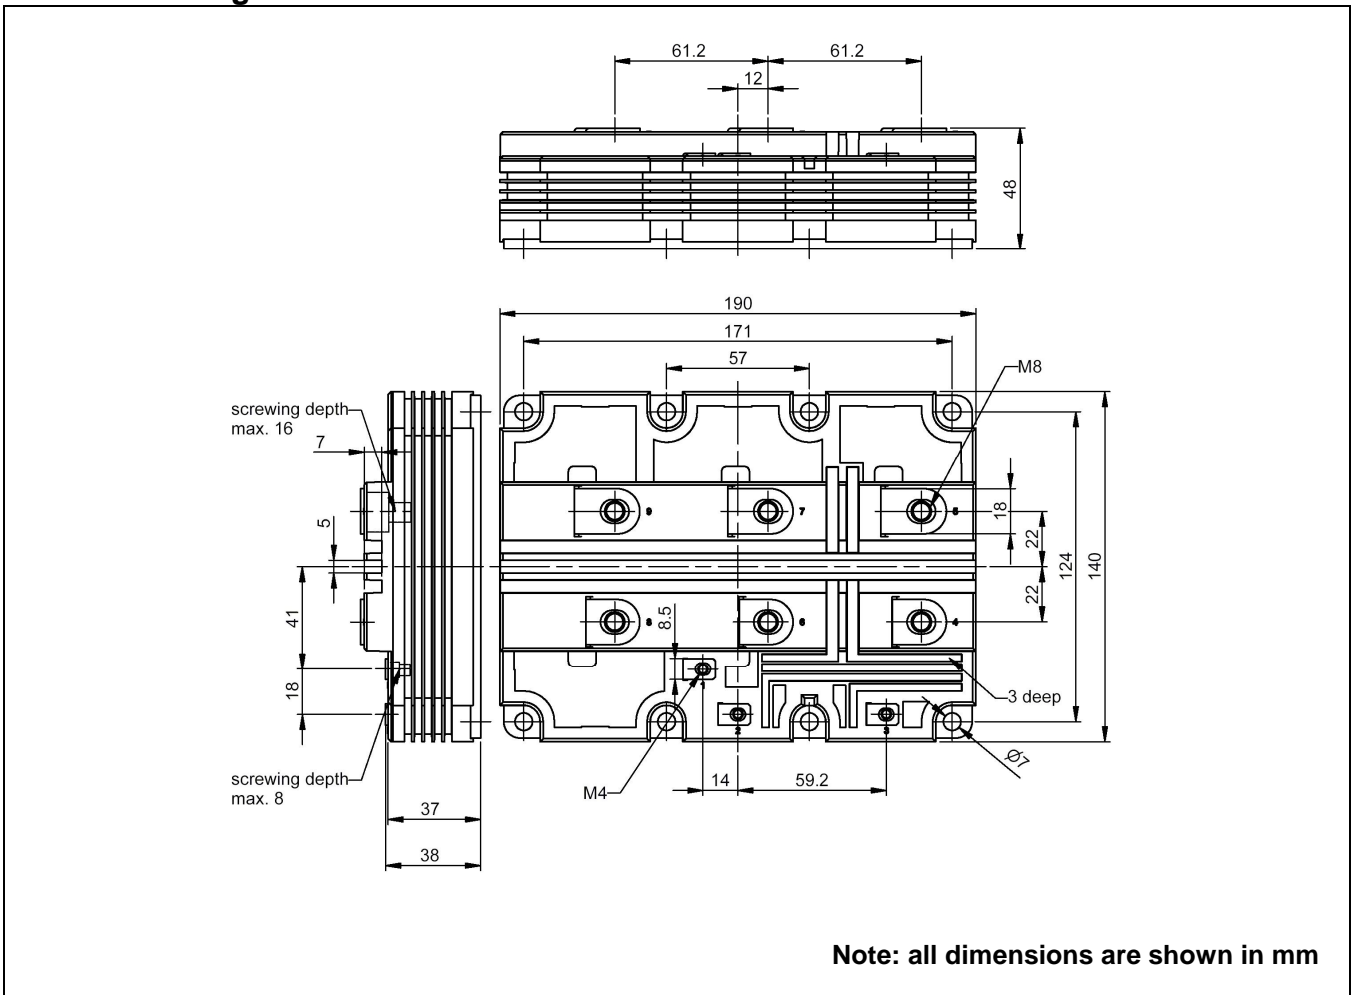

²⁾ For detailed mounting instructions refer to ABB Document No. 5SYA2039

This is an electrostatic sensitive device, please observe the international standard IEC 60747-1, chap. IX.

This product has been designed and qualified for Industrial Level.

[查询"5SNA1200G3301"供应商](#)

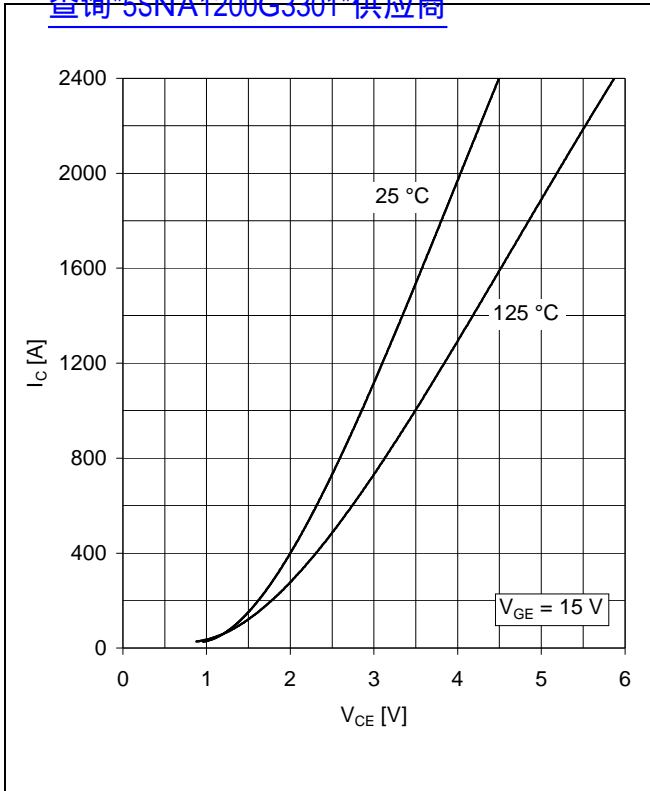


Fig. 1 Typical on-state characteristics, chip level

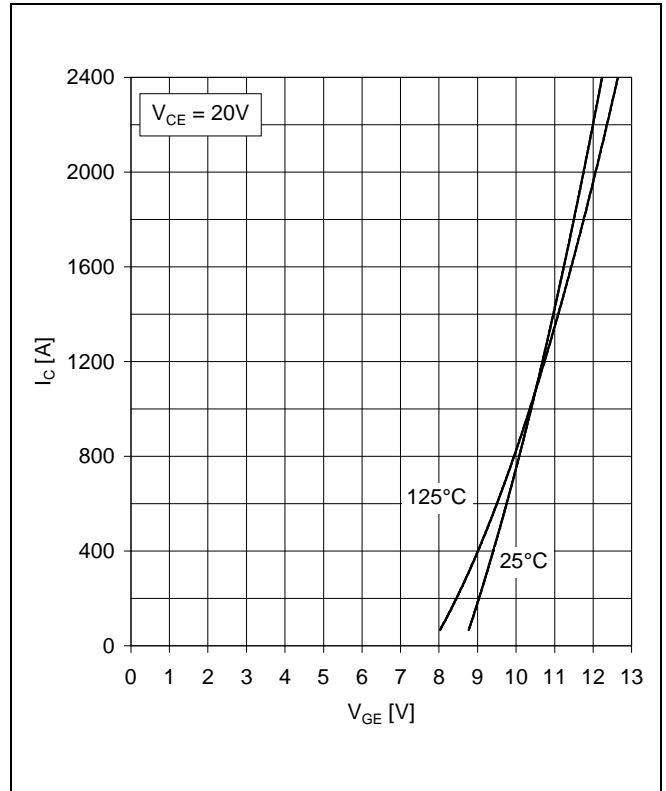


Fig. 2 Typical transfer characteristics, chip level

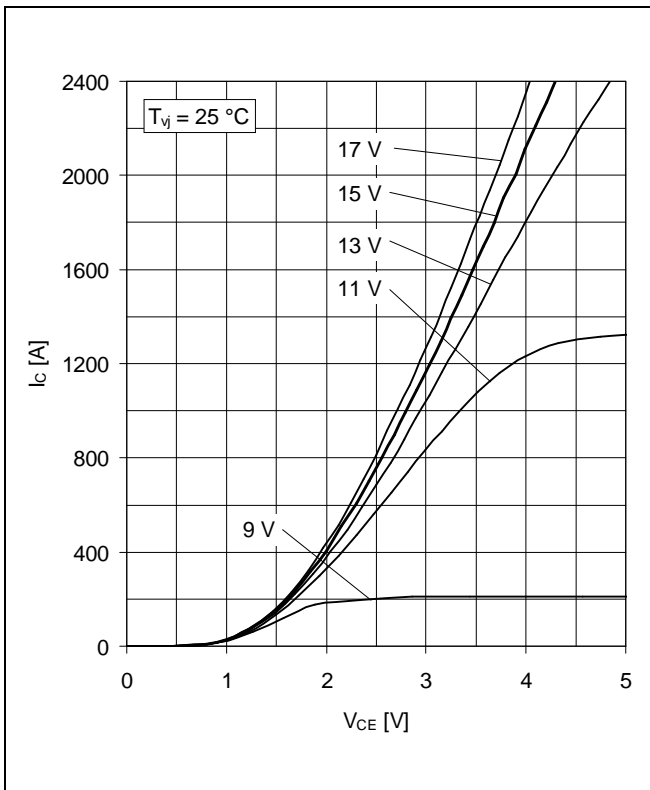


Fig. 3 Typical output characteristics, chip level

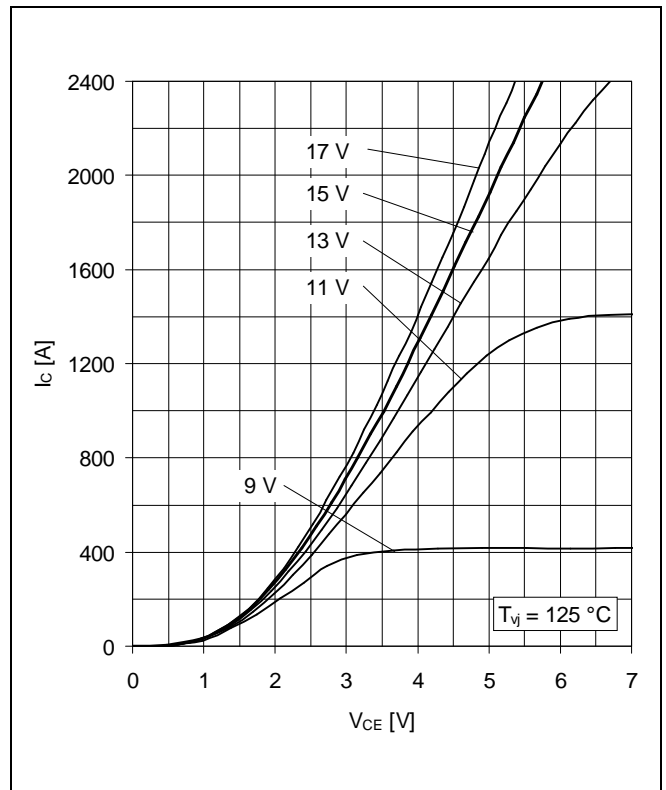


Fig. 4 Typical output characteristics, chip level

[查询"5SNA1200G3301"供应商](#)

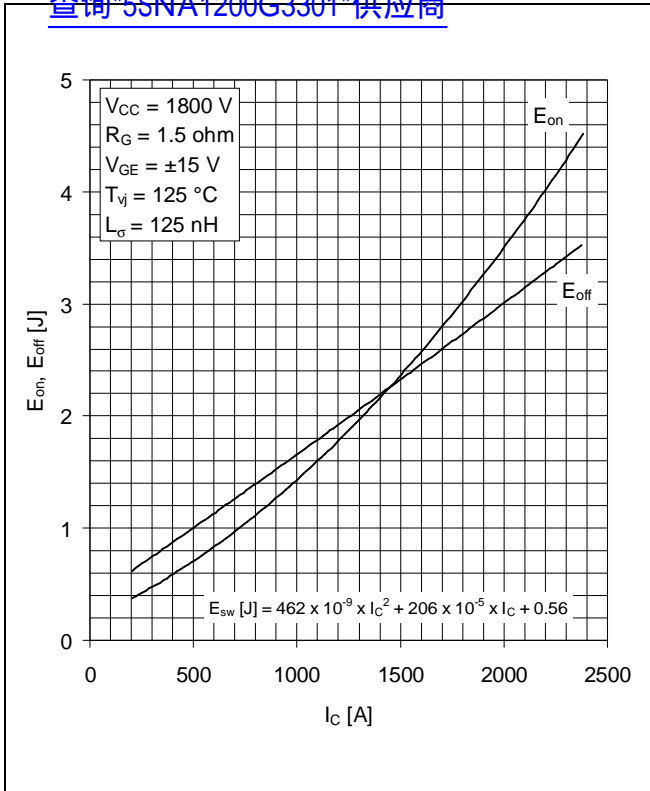


Fig. 5 Typical switching energies per pulse vs collector current

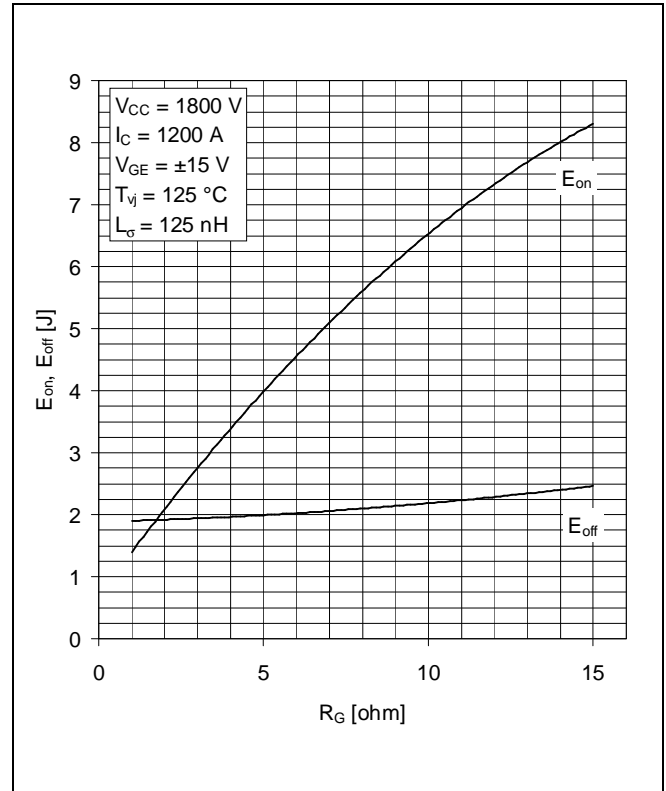


Fig. 6 Typical switching energies per pulse vs gate resistor

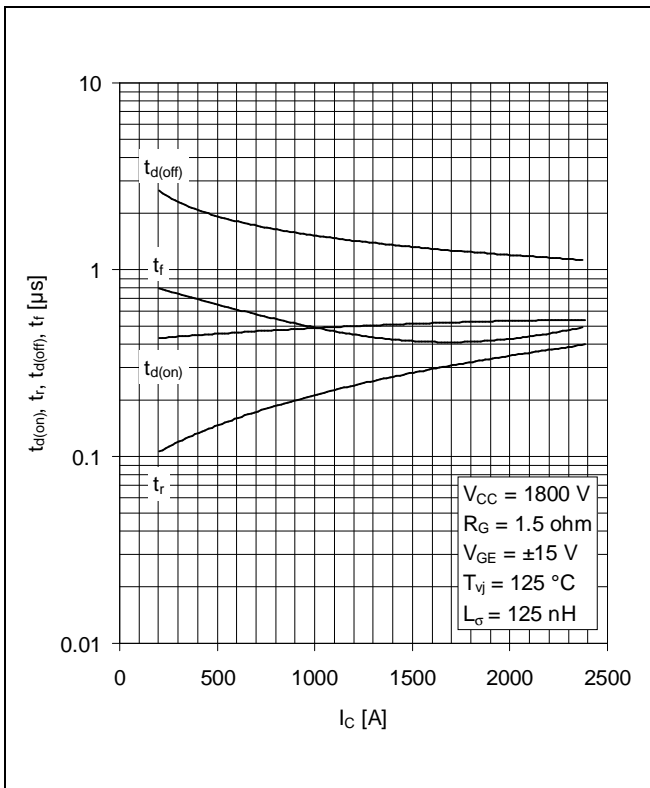


Fig. 7 Typical switching times vs collector current

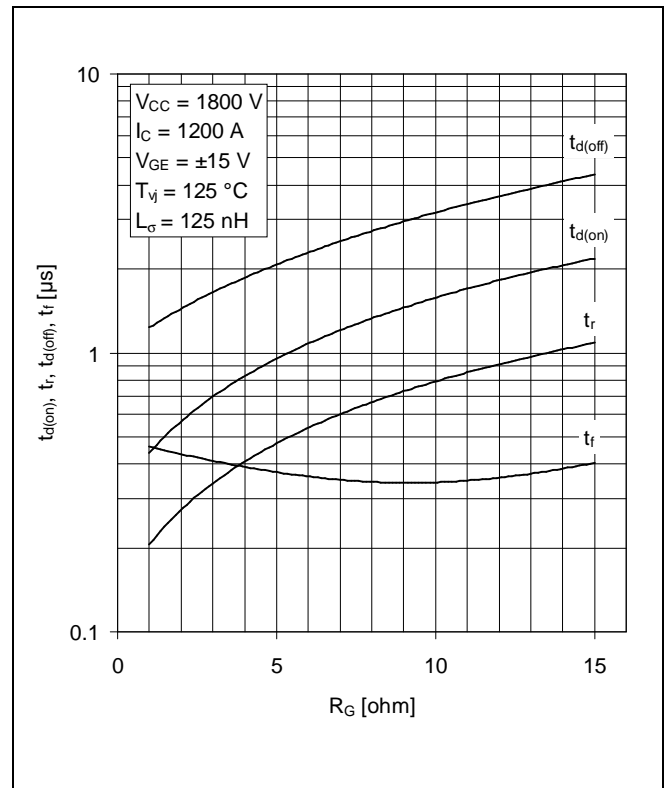


Fig. 8 Typical switching times vs gate resistor

[查询"5SNA1200G3301"供应商](#)

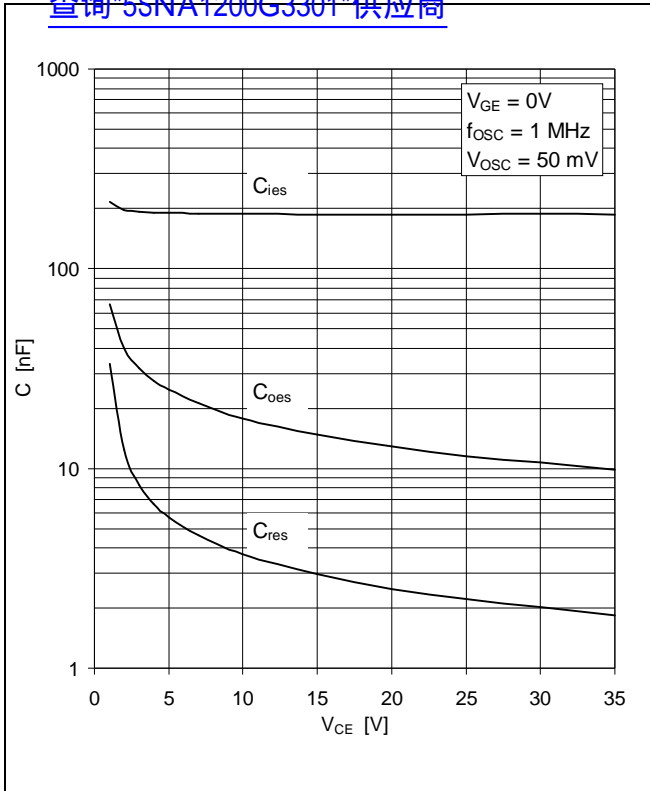


Fig. 9 Typical capacitances vs collector-emitter voltage

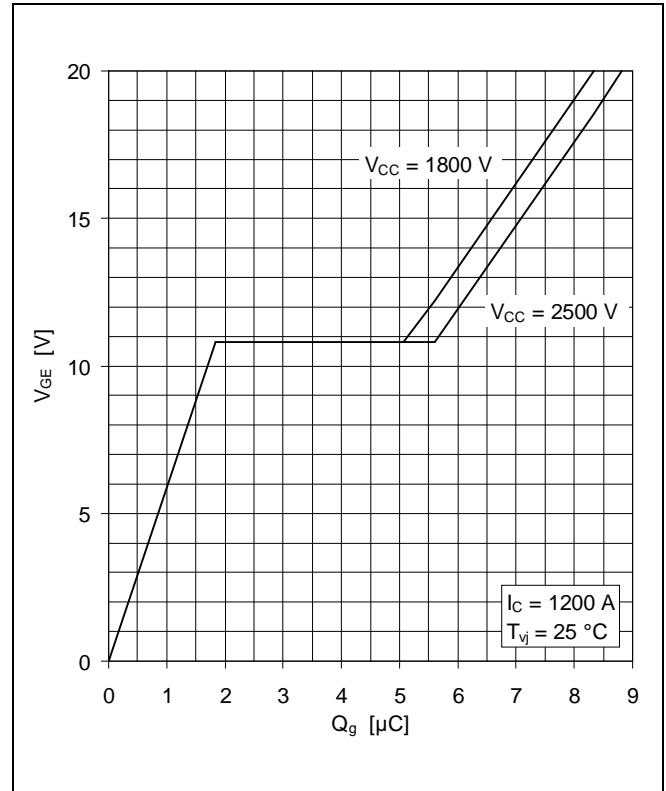


Fig. 10 Typical gate charge characteristics

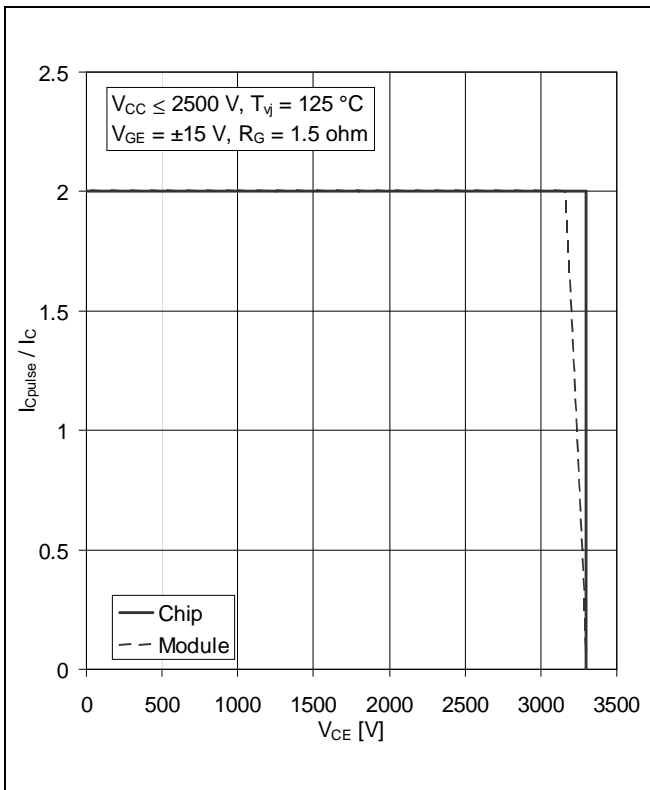


Fig. 11 Turn-off safe operating area (RBSOA)

[查询"5SNA1200G3301"供应商](#)

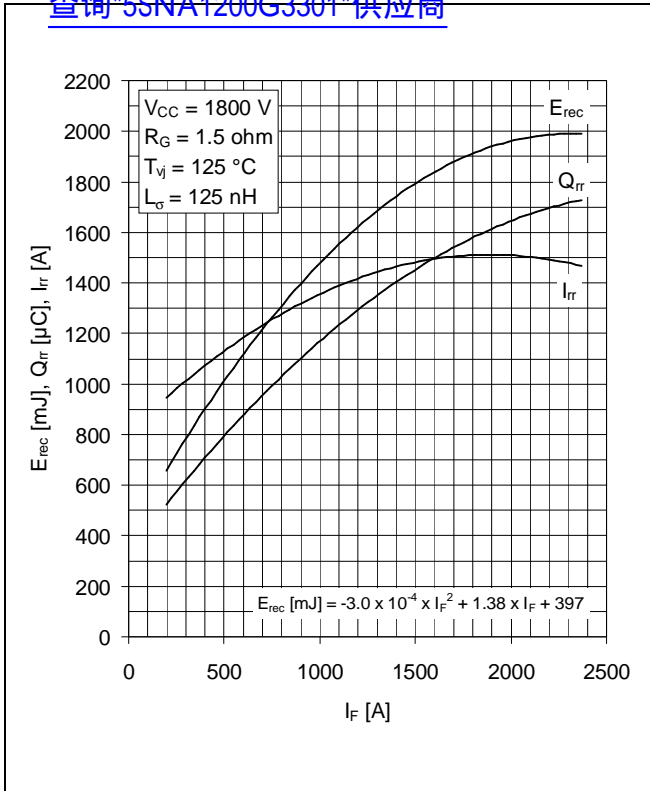


Fig. 12 Typical reverse recovery characteristics vs forward current

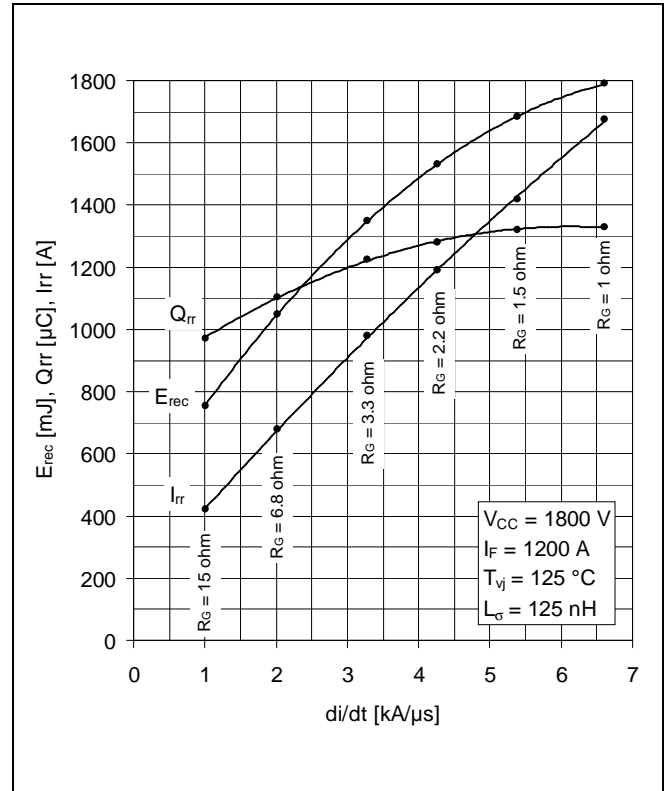


Fig. 13 Typical reverse recovery characteristics vs di/dt

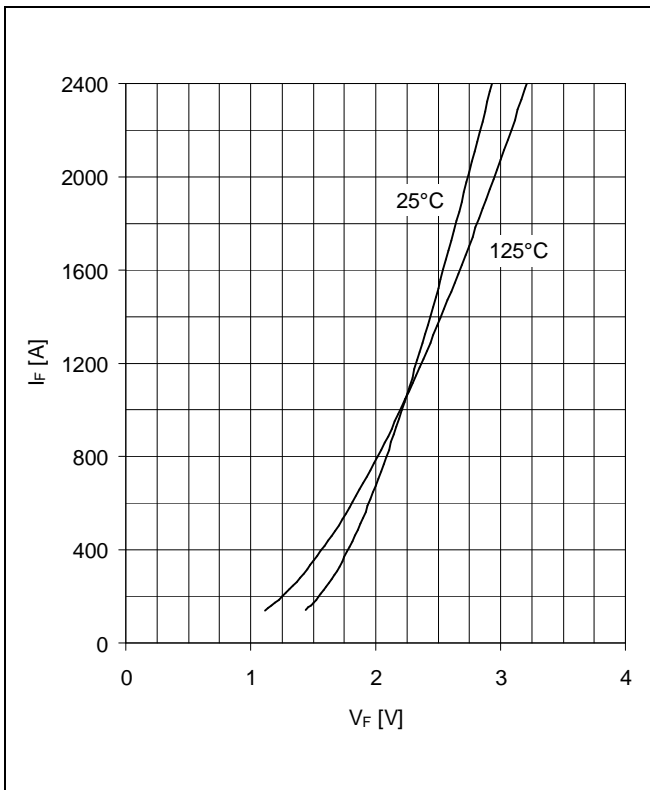


Fig. 14 Typical diode forward characteristics, chip level

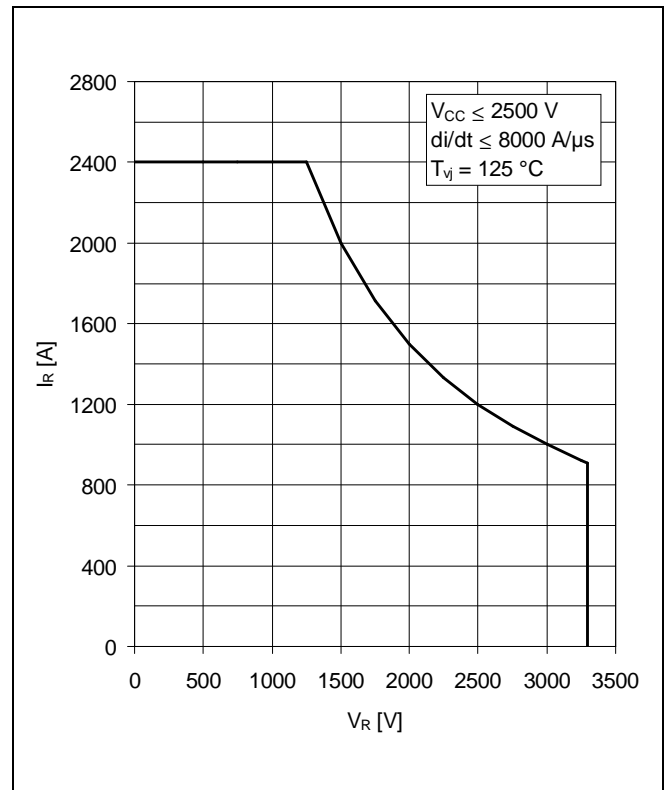


Fig. 15 Safe operating area diode (SOA)

[查询"5SNA1200G3301"供应商](#)

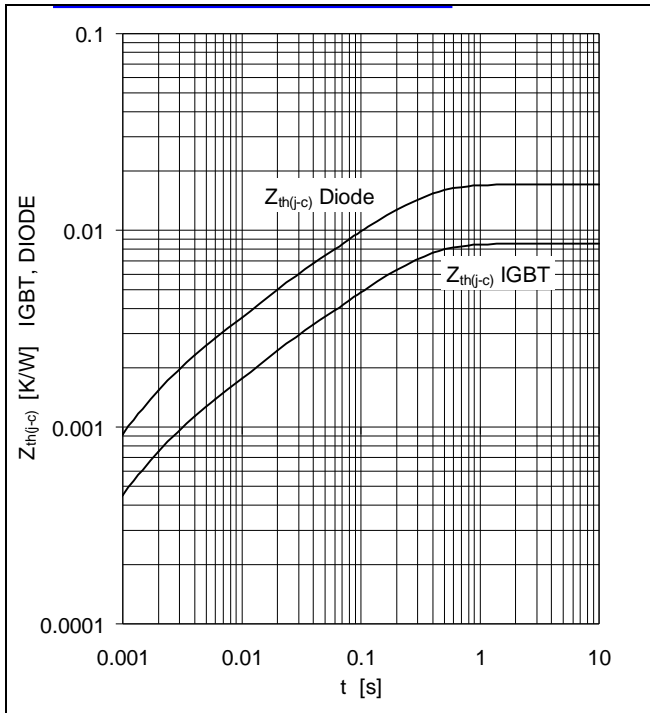


Fig. 16 Thermal impedance vs time

Analytical function for transient thermal impedance:

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

| | | | | | | |
|-------|-----------------------|------|------|-------|-------|---|
| | i | 1 | 2 | 3 | 4 | 5 |
| IGBT | R _i (K/kW) | 5.85 | 1.38 | 0.641 | 0.632 | |
| | τ _i (ms) | 207 | 30.1 | 7.55 | 1.57 | |
| DIODE | R _i (K/kW) | 11.5 | 2.89 | 1.23 | 1.3 | |
| | τ _i (ms) | 204 | 30.1 | 7.53 | 1.57 | |

For detailed information refer to:

- 5SYA 2042-02 Failure rates of HiPak modules due to cosmic rays
- 5SYA 2043-01 Load – cycle capability of HiPaks
- 5SZK 9120-00 Specification of environmental class for HiPak

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



ABB Switzerland Ltd
Semiconductors
 Fabrikstrasse 3
 CH-5600 Lenzburg, Switzerland

Doc. No. 5SYA1563-00 Apr.06

Telephone +41 (0)58 586 1419
 Fax +41 (0)58 586 1306
 Email abbsem@ch.abb.com
 Internet www.abb.com/semiconductors