


SPECIFICATION FOR APPROVAL

REF: 查询"SB2206331KL"供应商



PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB2206□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :

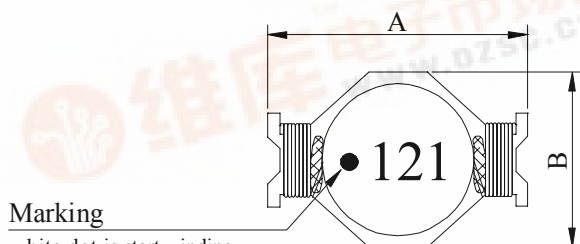

A	: 22.0 ±0.3	m/m
B	: 15.0 ±0.3	m/m
C	: 6.8 ±0.5	m/m
D	: 15.0 (typ.)	m/m
E	: 2.3 (typ.)	m/m
F	: 8.0 (typ.)	m/m

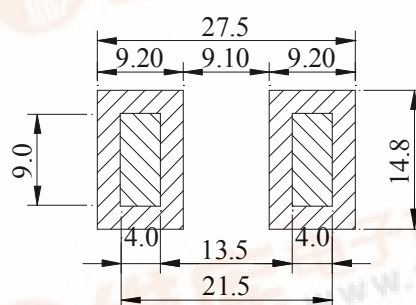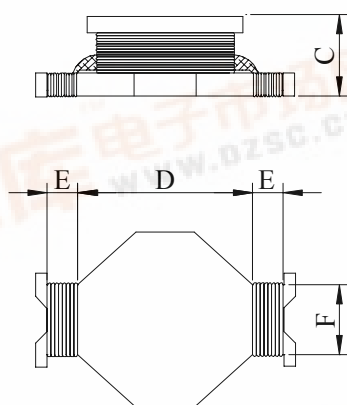

(PCB Pattern)

II . SCHEMATIC DIAGRAM :




III . MATERIALS :


- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire (class F)
- c . Base : Hitachi phenolic CP-J-8700
- d . Adhesive : Epoxy resin
- e . Terminal : Cu/Sn
- f . Remark : Products comply with RoHS' requirements

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C max.
- b . Storage temp. : -40°C ~ +125°C
- c . Operating temp. : -40°C ~ +105°C
- d . Resistance to solder heat : 260°C. 10 secs.

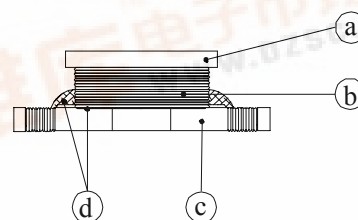

Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

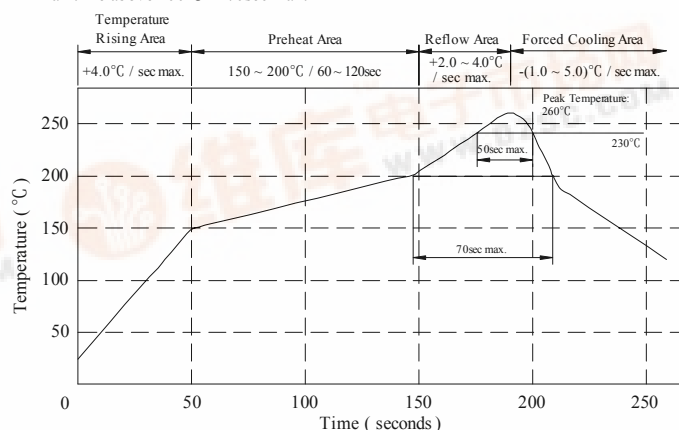

AE-001A



千如電子集團
ABC ELECTRONICS GROUP.



SPECIFICATION FOR APPROVAL

REF 查询"SB2206331KL"供应商

PAGE: 2


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB2206□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :


DWG NO.	Inductance (μ H) 0.1V/100KHz	Q ref.	SRF (MHz) nom.	RDC (m Ω) max.	Irms (A) max. $\Delta T = 40^{\circ}\text{C}$	IpK (A) typ. $\Delta L / L0A = 10\%$
SB2206121KL□-□□□	120 $\pm$ 10%	20	5.00	230	1.60	3.0
SB2206151KL□-□□□	150 $\pm$ 10%	19	4.87	250	1.50	2.6
SB2206181KL□-□□□	180 $\pm$ 10%	17	4.65	300	1.30	2.5
SB2206221KL□-□□□	220 $\pm$ 10%	19	3.97	380	1.20	2.4
SB2206271KL□-□□□	270 $\pm$ 10%	22	3.37	470	1.10	2.2
SB2206331KL□-□□□	330 $\pm$ 10%	20	3.15	560	1.00	1.9
SB2206391KL□-□□□	390 $\pm$ 10%	21	3.00	680	0.90	1.7
SB2206471KL□-□□□	470 $\pm$ 10%	25	2.55	850	0.82	1.4
SB2206561KL□-□□□	560 $\pm$ 10%	23	2.40	1000	0.78	1.3
SB2206681KL□-□□□	680 $\pm$ 10%	25	2.50	1100	0.72	1.2
SB2206821KL□-□□□	820 $\pm$ 10%	25	1.97	1400	0.64	1.1
SB2206102KL□-□□□	1000 $\pm$ 10%	25	1.60	1800	0.56	1.0

- 1). □ : Packaging information... ☐ Bulk ☐ Taping Reel
- 2). "- □□□":Reference code
- 3). Irms base on Temp. rise 40°C max.
- 4). IpK base on $\Delta L / L0A = 10\%$ typ.
- 5). L,Q Test Frequency : 100KHz / 0.1V

@ Inductance VS. DC Current Curve

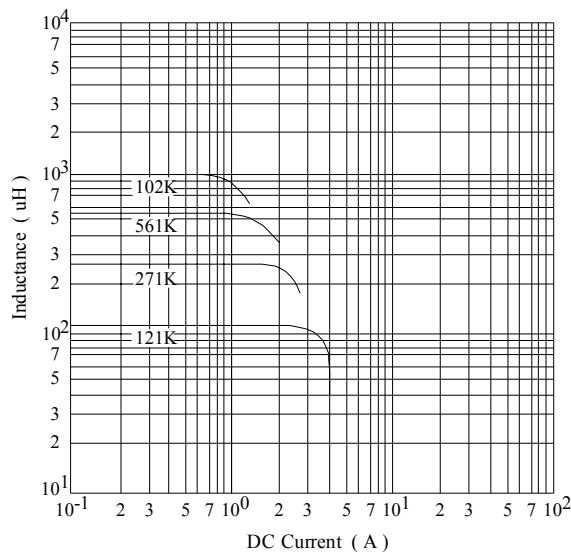

@ DC Current VS. Temp. Rise Curve

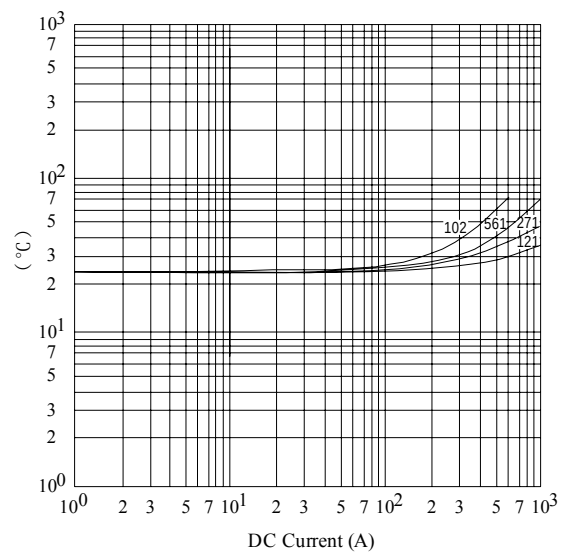

AE-001A

ABC 千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL


REF: 查询"SB2206331KL"供应商

PAGE: 3


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB2206□□□□L□-□□□
		ABC'S ITEM NO.	

VI . PACKAGING INFORMATION :

1. Configuration :

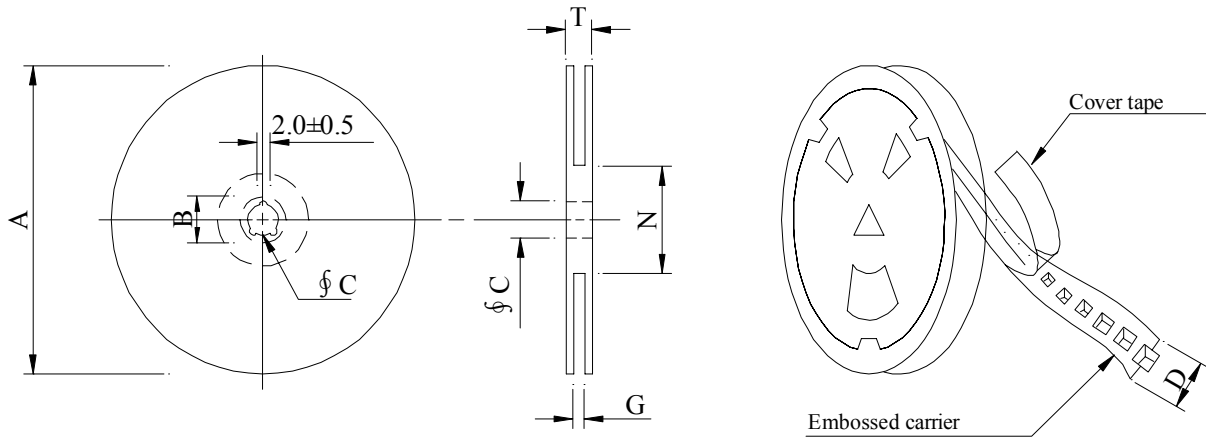

※Carrier tape width : D

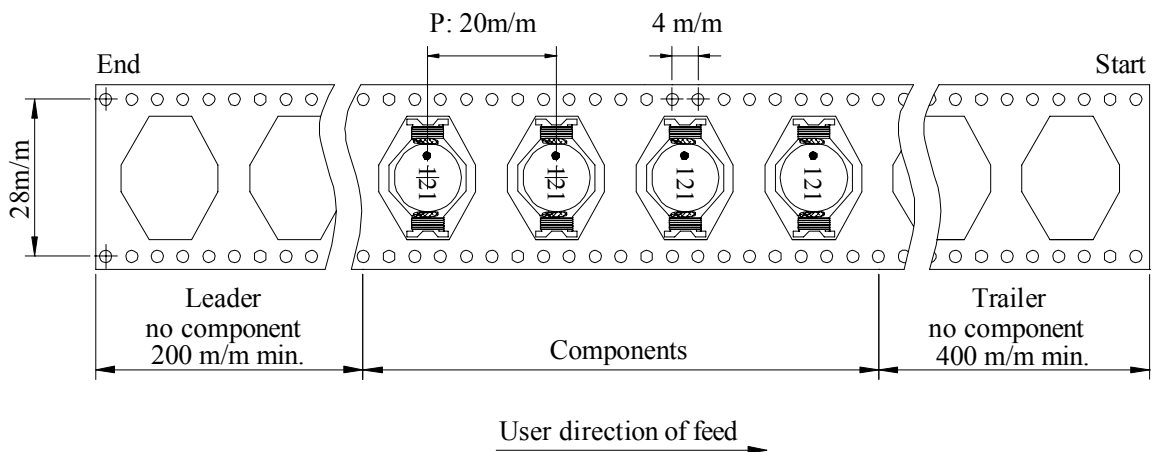

2. Dimensions : (m/m)

Style	A	B	C	D	G	N	T
13 - 32	330	21±0.8	13±0.5	32	34 ⁺⁰	100 ⁻⁰	38.4

3. Q'TY & G.W. Per package :

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (kg)	Size (cm)
SB2206	250	1,250	13 - 32	1,000	6.8	40 x 40 x 24

AE-001A


SPECIFICATION FOR APPROVAL

REF: 查询"SB2206331KL"供应商

PAGE: 4

PROD.	SMD POWER INDUCTOR	ABC'S DWG NO.	SB2206□□□□L□-□□□
NAME		ABC'S ITEM NO.	

VII . DWGING NUMBER EXPRESSION :

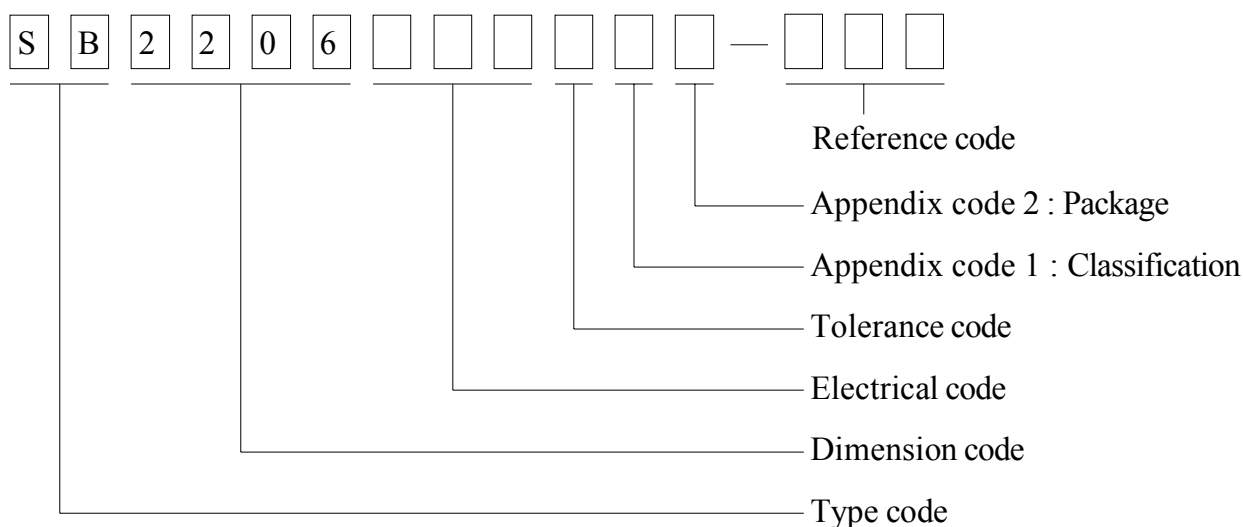

Appendix code 1 : Product Classification


L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	250 pcs	

AE-001A



SPECIFICATION FOR APPROVAL

REF 查询"SB2206331KL"供应商


PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB2206□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25°C for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 4±1 seconds
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	Room temp. 15 minutes ————→ -25±2 °C 30 minutes Room temp. 15 minutes ————→ 85±2 °C 30 minutes Total : 50 cycles
Humidity Resistance test		Temperature : 40±2°C Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours
High temp. Resistance test		Temperature : 105±2°C Applied current : Per spec. Time : 500 hours

AE-001A



SPECIFICATION FOR APPROVAL

REP 查询"SB2206331KI"供应商

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB2206□□□□L□-□□□
		ABC'S ITEM NO.	

IX . UL CARD :

OBMW2
Magnet Wire-Component
JUNG SHING WIRE CO LTD
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

September 8, 2000
E174837

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
ELAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	Polyamide	—	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	Nylon	—	MW28-C	130
UEY-2	—	Polyurethane	Polyamide	—	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signi-
fies base coated magnet wire twisted together and covered with top coat overall.
Marking: Company name or trademarks JSW or 榮星電線 , material designation or marked designation on packaed or reel, and
Recognized Component Mark.
See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2E174837
September 8 , 2000


QMFZ2
Component-Plastics
HITACHI CHEMICAL CO LTD

November 6, 1989
E42956 (R)
(F-cont. from EI card)

CP-J-8700	BK	0.48	94V-0	150	150	150	—	—	—	—	—
		0.76	94V-0	150	150	150	2	1	0	—	—
		1.60	94V-0	150	150	150	2	1	0	—	—
		3.12	94V-0	150	150	150	0	1	0	4	3

Report : March 10, 1980.
418315008 N7047 Underwriters Laboratories Inc. ® (Cont. on F1 card)
D11/0026311

AE-001A



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn