

查询"CTDO3316PF-473"供应商

CTDO3316 Series

From 1.0 μH to 1,500 μH

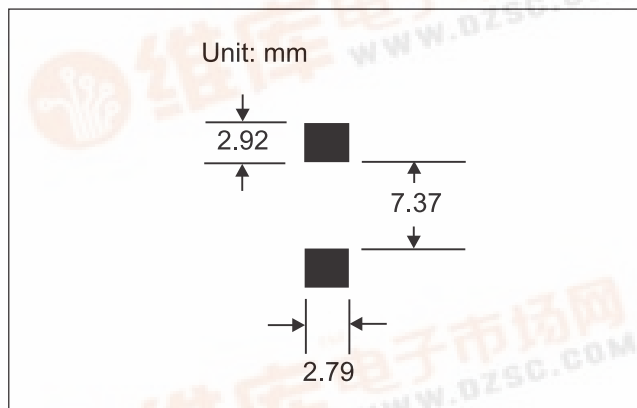
ENGINEERING KIT #8



CHARACTERISTICS

Description: SMD power inductor**Applications:** DC/DC converters, computers, LCD displays, telecommunication equipment and PDA palm tops.**Operating Temperature:** -40°C to +125°C **ΔT :** 40°C typically at I_{rms} **Inductance Tolerance:** $\pm 20\%$ **Inductance Drop:** 10% typically at I_{sat} **Testing:** Inductance is tested on an HP4285A at 100 kHz**Packaging:** Tape & Reel**Marking:** Color dots OR Inductance code**Miscellaneous:** RoHS Compliant available.**Additional Information:** Additional electrical & physical information available upon request**Samples available.** See website for ordering information.

PAD LAYOUT



SPECIFICATIONS

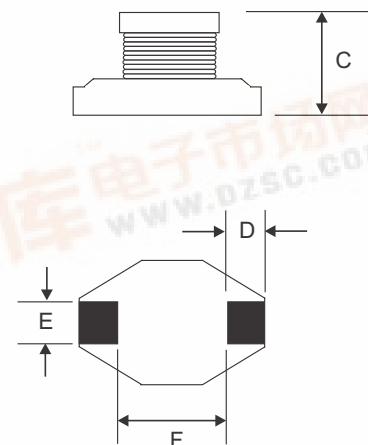
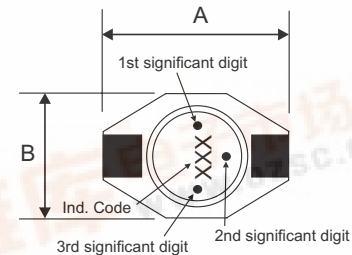
Parts are available in $\pm 20\%$ tolerance only.

CTDO3316PE Please specify "F" for RoHS compliant

Part Number	Inductance (μH)	L Test Freq. (kHz)	DCR (Ω)	SRF (MHz)	I_{sat} (A)	I_{rms} (A)
CTDO3316P_-102	1.0	100	.01	100	9.0	6.8
CTDO3316P_-152	1.5	100	.01	90	8.0	6.4
CTDO3316P_-222	2.2	100	.01	80	7.0	6.1
CTDO3316P_-332	3.3	100	.02	65	6.4	5.4
CTDO3316P_-472	4.7	100	.02	45	5.4	4.8
CTDO3316P_-682	6.8	100	.03	38	4.6	4.4
CTDO3316P_-103	10	100	.04	30	3.8	3.9
CTDO3316P_-153	15	100	.05	27	3.0	3.1
CTDO3316P_-223	22	100	.09	19	2.6	2.7
CTDO3316P_-333	33	100	.10	15	2.0	2.1
CTDO3316P_-473	47	100	.14	12	1.6	1.8
CTDO3316P_-683	68	100	.20	10	1.4	1.5
CTDO3316P_-104	100	100	.30	9.0	1.2	1.3
CTDO3316P_-154	150	100	.40	6.0	1.0	1.0
CTDO3316P_-224	220	100	.60	5.0	.80	.80
CTDO3316P_-334	330	100	1.0	4.5	.60	.60
CTDO3316P_-474	470	100	1.3	3.5	.50	.50
CTDO3316P_-684	680	100	2.0	2.5	.40	.40
CTDO3316P_-105	1000	100	3.0	2.0	.30	.30
CTDO3316P_-155	1500	100	5.0	1.0	.27	.25

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F
mm	12.95	9.4	5.2	2.54	2.54	7.62
inches	0.51	0.37	0.2	0.1	0.1	0.3

Parts will be marked with
Significant Digit Dots OR Inductance Code

12.06.05

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

