


[查询"CTCB1812F-300P"供应商](#)

CTCBF Series

Power

From 10 Ω to 1,500 Ω

ENGINEERING KIT #33

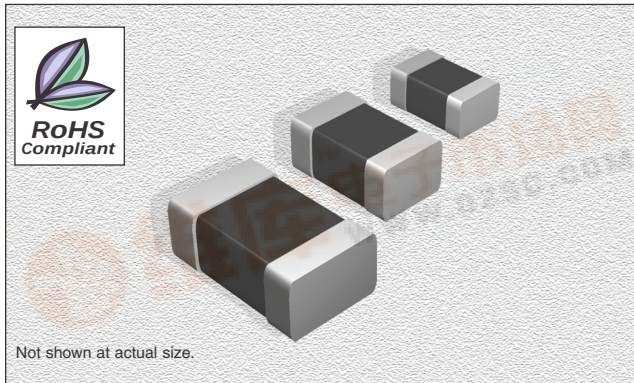

CHARACTERISTICS

Description: Power multi-layer ferrite chip beads**Applications:** Noise suppression in computer peripherals, telecommunication equipment, data communication equipment and other consumer electronics**Operating Temperature:** -55°C to +125°C**Impedance Range:**

- CTCB0402F: 10-120 Ω
- CTCB0603F: 11-1000 Ω
- CTCB0805F: 11-1000 Ω
- CTCB1206F: 19-1500 Ω
- CTCB1210F: 60-90 Ω
- CTCB1806F: 50-150 Ω
- CTCB1812F: 19-190 Ω

Testing: Impedance is tested on an HP4287A at at specified frequency.**Packaging:** Tape & Reel**Miscellaneous:** RoHS Compliant.**Marking:** Reels marked with part number**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

SPECIFICATIONS

Parts are available in $\pm 25\%$ tolerance only.

Part Number	Impedance (Ω)	Test Freq. (MHz)	DCR Max. (Ω)	IDC (mA)
CTCB0402F-100P	10	100	.03	2000
CTCB0402F-300P	30	100	.05	1700
CTCB0402F-400P	40	100	.075	1500
CTCB0402F-600P	60	100	.075	1500
CTCB0402F-700P	70	100	.09	1200
CTCB0402F-800P	80	100	.09	1200
CTCB0402F-121P	120	100	.09	1200
CTCB0603F-110P	11	100	.02	4000
CTCB0603F-190P	19	100	.03	3000
CTCB0603F-200P	20	100	.03	3000
CTCB0603F-220P	22	100	.03	3000
CTCB0603F-250P	25	100	.03	3000
CTCB0603F-300P	30	100	.03	3000
CTCB0603F-310P	31	100	.035	3000
CTCB0603F-400P	40	100	.035	3000
CTCB0603F-470P	47	100	.04	3000
CTCB0603F-500P	50	100	.04	3000
CTCB0603F-560P	56	100	.04	3000
CTCB0603F-600P	60	100	.04	3000
CTCB0603F-680P	68	100	.05	2500
CTCB0603F-700P	70	100	.05	2500
CTCB0603F-750P	75	100	.05	2500
CTCB0603F-800P	80	100	.05	2500
CTCB0603F-900P	90	100	.05	2500
CTCB0603F-101P	100	100	.05	2500
CTCB0603F-121P	120	100	.05	2500
CTCB0603F-151P	150	100	.085	2000
CTCB0603F-181P	180	100	.09	2000
CTCB0603F-201P	200	100	.095	2000
CTCB0603F-221P	220	100	.10	2000
CTCB0603F-301P	300	100	.10	2000
CTCB0603F-501P	500	100	.15	1500
CTCB0603F-601P	600	100	.20	1000
CTCB0603F-102P	1000	100	.25	800
CTCB0805F-110P	11	100	.01	6000
CTCB0805F-170P	17	100	.02	5000
CTCB0805F-300P	30	100	.02	4000
CTCB0805F-500P	50	100	.025	3000
CTCB0805F-600P	60	100	.03	3000
CTCB0805F-800P	80	100	.04	3000
CTCB0805F-121P	120	100	.04	3000
CTCB0805F-201P	200	100	.05	2500
CTCB0805F-301P	300	100	.08	2000
CTCB0805F-601P	600	100	.10	2000
CTCB0805F-102P	1000	100	.12	1500
CTCB1206F-190P	19	100	.015	6000
CTCB1206F-320P	32	100	.035	4000
CTCB1206F-500P	50	100	.02	4000
CTCB1206F-800P	80	100	.025	3000
CTCB1206F-900P	90	100	.03	2500
CTCB1206F-101P	100	100	.03	2500
CTCB1206F-301P	300	100	.06	2000
CTCB1206F-501P	500	100	.10	2000
CTCB1206F-601P	600	100	.10	1800
CTCB1206F-102P	1000	50	.15	1200
CTCB1206F-122P	1200	50	.18	1000
CTCB1206F-152P	1500	50	.20	800
CTCB1210F-600P	60	100	.03	4000
CTCB1210F-900P	90	100	.03	3000
CTCB1806F-500P	50	100	.02	6000
CTCB1806F-600P	60	100	.02	5000
CTCB1806F-800P	80	100	.03	4000
CTCB1806F-151P	150	100	.10	2000
CTCB1812F-190P	19	100	.03	6000
CTCB1812F-300P	30	100	.03	6000
CTCB1812F-470P	47	100	.03	6000
CTCB1812F-500P	50	100	.03	6000
CTCB1812F-600P	60	100	.03	6000
CTCB1812F-700P	70	100	.03	6000
CTCB1812F-800P	80	100	.03	4000
CTCB1812F-900P	90	100	.03	4000
CTCB1812F-121P	120	100	.03	4000
CTCB1812F-125P	125	100	.03	4000
CTCB1812F-151P	150	100	.03	4000
CTCB1812F-191P	190	100	.03	4000

05.30.08

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2008 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice



[查询"CTCB1812F-300P"供应商](#)


CTCBF Series

Power


PHYSICAL DIMENSIONS

Size		A	B	C	D
0402/1005	inches	0.039±0.006	0.02±0.006	0.02±0.006	0.01±0.006
	mm	1.0±0.15	0.5±0.15	0.5±0.15	0.25±0.15
0603/1608	inches	0.063±0.008	0.03±0.008	0.03±0.008	0.016±0.008
	mm	1.6±0.2	0.8±0.2	0.8±0.2	0.4±0.2
0805/2012	inches	0.08±0.008	0.047±0.008	0.035±0.008	0.02±0.012
	mm	2.0±0.2	1.2±0.2	0.9±0.2	0.5±0.3
1206/3216	inches	0.126±0.008	0.063±0.008	0.043±0.008	0.02±0.012
	mm	3.2±0.2	1.6±0.2	1.1±0.2	0.5±0.3
1210/3225	inches	0.126±0.008	0.098±0.008	0.05±0.008	0.02±0.12
	mm	3.2±0.2	2.5±0.2	1.3±0.2	0.3±0.3
1806/4516	inches	0.177±0.01	0.063±0.008	0.063±0.008	0.02±0.012
	mm	4.5±0.25	1.6±0.2	1.6±0.2	0.5±0.3
1812/4532	inches	0.177±0.008	0.126±0.008	0.05±0.008	0.02±0.012
	mm	4.5±0.2	3.2±0.2	1.5±0.2	0.5±0.3


CTCB0402F




CTCB0603F




CTCB0805F




CTCB1206F

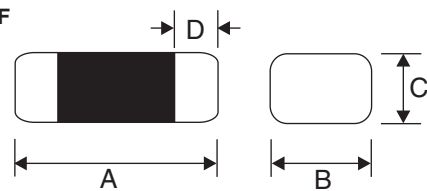


CTCB1210F

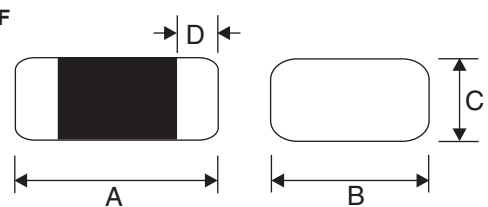

CTCB1806F

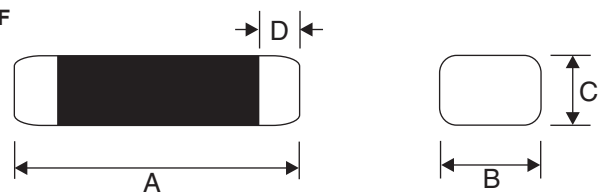

CTCB1812F

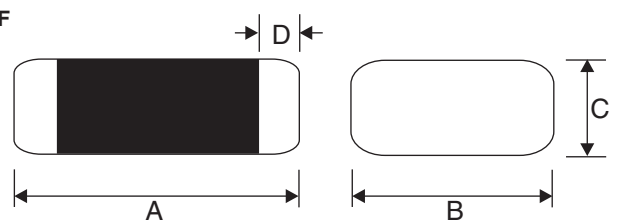

05.30.08