

4W LMT2110 32.0:1 Transformer
DESCRIPTION

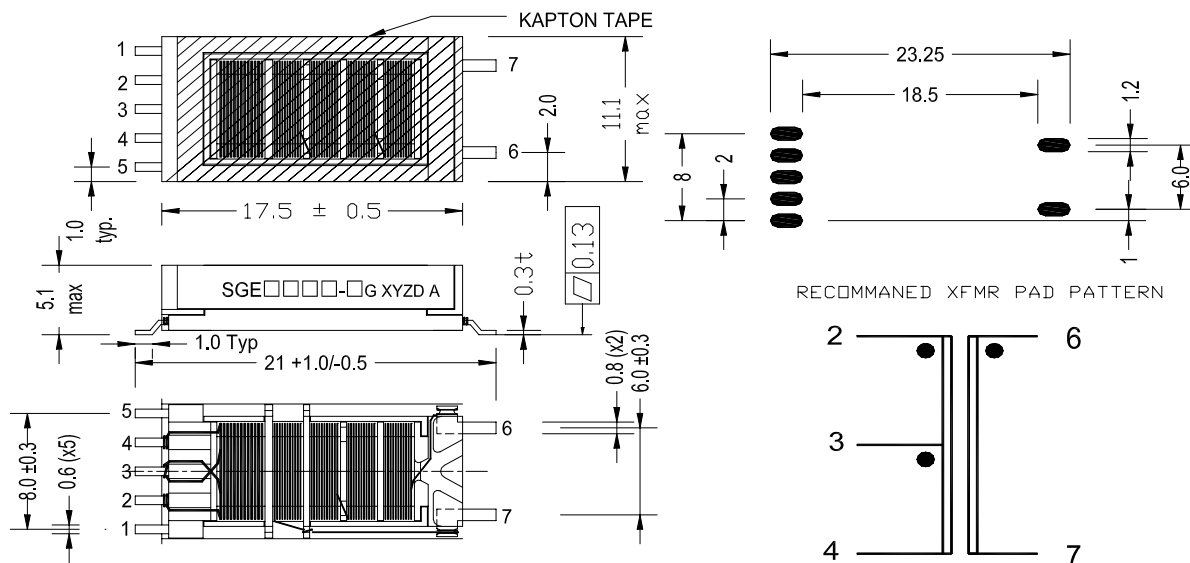
This document describes and specifies the electrical and mechanical characteristics of the SGE2682-1G high voltage transformer for CCFL inverter power supplies. SGE2682-1G is the RoHS compliant and Lead free transformer. For Reliability and Safety Specification, refer to SGE2606-3.

ELECTRICAL CHARACTERISTICS

Items	Inductance (@ 10KHz, 0.1V)			Items	DC. Resistance		
	Min	Nom	Max		Min	Nom	Max
L2-3, L3-4 (μH)	273	321	370	R _{DC} 2-3, R _{DC} 3-4(mΩ)	280	285	290
L6-7 (mH)	1024	1213	1396	R _{DC} 6-7 (Ω)	350	361	390
L _{LKG} 2-3, L _{LKG} 3-4 (μH)	Inductance (@ 100KHz, 1V)			R _{DC} 2-3 / R _{DC} 3-4	0.96	1	1.04
	12.7	14	15.3	Secondary Self Capacitance (HP4192A 1MHz C meter, 30mVrms)			
L _{LKG} 6-7 (mH)	NA	NA	NA	C ₆₋₇ (pF)	2.0	2.5	3.5
Rating				Dielectric Voltage Withstand			
Note: Max output power varies depend on operating condition.				60Hz, Arc-detect enabled, 5 sec. min. 200μA max. leakage current			
Max Open Output Voltage		1500V _{RMS} , 3sec.		Secondary to Core		2000V _{RMS} min. (60sec)	
Max Output Voltage		1000V _{RMS}		Primary to Core		1000V _{RMS} min.	
Max Output Power		4W		Primary to Secondary		1000V _{RMS} min.	

WINDING SPECIFICATIONS

	Primary		Secondary
	Pin 2 – 3	Pin 3 – 4	Pin 6 – 7
Winding Sequence	2S – 3F	3S – 4F	6S – 7F
Wire Size & Type	#33, Single Insulation, 180°C	#33, Single Insulation, 180°C	#46, Triple Insulation, 180°C
Number of Turns	25	25	1600
Winding Method	Bifilar		

PHYSICAL SPECIFICATIONS & WIRING DIAGRAM


Note : This Transformer is designed for single ended application. Pin 7 must be connected to low voltage side or ground.

PART MARKING

SGE□□□□-□G XYZD A – SGE2682-1G: MSC PN, XYZ: Datecode (X:YR, YZ=WK), D: Plant Code, A: Rev.#

PACKAGING SPEC AND ORDER INFORMATION

Packaging Order Information – SGE2682-1G (Standard for TRAY)

SGE2682-1GTR (Tape and Reel)

TAPE & REEL : Refer to SGE2604-3 specification



[查询"SGE2682-1G"供应商](#)

Specification Number
SGE2682-1G
Revision. A (090605)

4W LMT2110 32.0:1 Transformer

NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.