


# Oval Red LED Lamp (5 mm)

[查询"OVLHRKD8"供应商](#)

## OVLHRKD8

- High luminous intensity
- Defined spatial radiation
- Multiple viewing angles
- UV-resistant epoxy
- Precision optical performance


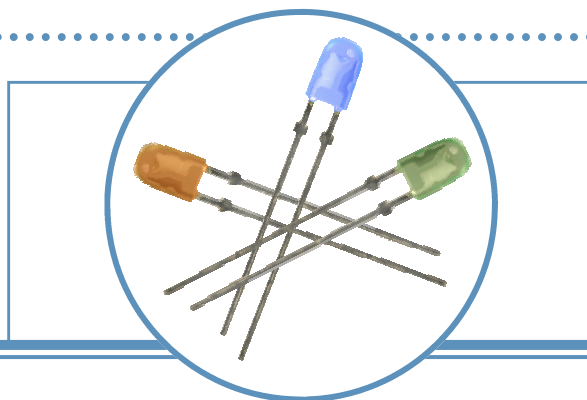


The **OVLHRKD8** is designed for superior performance in outdoor environments. Its radiation pattern matches blue (OVLHBKD8), orange (OVLHQKD8) and green (OVLHGKD8) devices in identical packages to create LED pixels for full-color video screens.

## Applications

- Variable message signs
- Indoor/outdoor advertising signage
- Traffic and highway signs
- Full-color video signs

| Part Number | Material | Emitted Color | Intensity Typ. mcd | Lens Color   |
|-------------|----------|---------------|--------------------|--------------|
| OVLHRKD8    | AlInGaP  | Red           | 950                | Red Diffused |

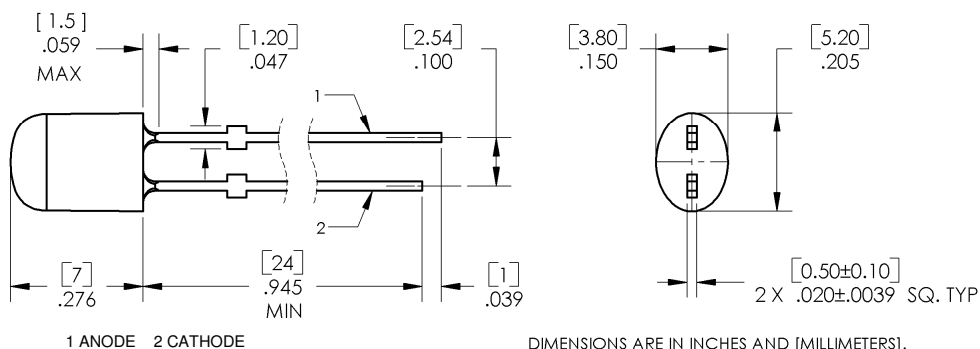

**DO NOT LOOK DIRECTLY  
AT LED WITH UNSHIELDED  
EYES OR DAMAGE TO  
RETINA MAY OCCUR.**

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# Oval Red LED Lamp (5 mm)

查询"OVLHRKD8"供应商  
OVLHRKD8

## Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$  unless otherwise noted

|                                                                               |              |
|-------------------------------------------------------------------------------|--------------|
| Storage Temperature Range                                                     | -40 ~ +100°C |
| Operating Temperature Range                                                   | -40 ~ +95°C  |
| Reverse Voltage                                                               | 5 V          |
| Continuous Forward Current <sup>2</sup>                                       | 50 mA        |
| Peak Forward Current (10% Duty Cycle, 1KHz)                                   | 200 mA       |
| Power Dissipation                                                             | 130 mW       |
| Lead Soldering Temperature (3mm from the base of the epoxy bulb) <sup>1</sup> | 260°C        |
| Electrostatic Discharge Classification (ESD) (MIL-STD-883E)                   | Class 1      |

Notes:

1. Solder time less than 3 seconds at temperature extreme.
2. For long-term performance, the drive currents between 10 mA and 30 mA are recommended. Please contact an OPTEK sales representative for more information on recommended drive conditions.


## Electrical Characteristics

$T_A = 25^\circ\text{C}$  unless otherwise noted

| SYMBOL                    | PARAMETER           | MIN  | TYP  | MAX  | UNITS         | CONDITIONS           |
|---------------------------|---------------------|------|------|------|---------------|----------------------|
| $I_V$                     | Luminous Intensity  | 550  | 900  | ---- | mcd           | $I_F = 20\text{ mA}$ |
| $V_F$                     | Forward Voltage     | ---- | 2.1  | 2.6  | V             | $I_F = 20\text{ mA}$ |
| $I_R$                     | Reverse Current     | ---- | ---- | 100  | $\mu\text{A}$ | $V_R = 5\text{ V}$   |
| $\lambda_D$               | Dominant Wavelength | 618  | 624  | 630  | nm            | $I_F = 20\text{ mA}$ |
| $2\Theta_{1/2\text{H-H}}$ | 50% Power Angle     | ---- | 110  | ---- | deg           | $I_F = 20\text{ mA}$ |
| $2\Theta_{1/2\text{V-V}}$ |                     | ---- | 50   | ---- | deg           | $I_F = 20\text{ mA}$ |

## Standard Bins ( $I_F = 20\text{mA}$ )

Lamps are sorted to luminous intensity ( $I_V$ ) and dominant wavelength ( $\lambda_D$ ) bins shown.  
Orders for OVLHRKD8 may be filled with any or all bins contained as below.

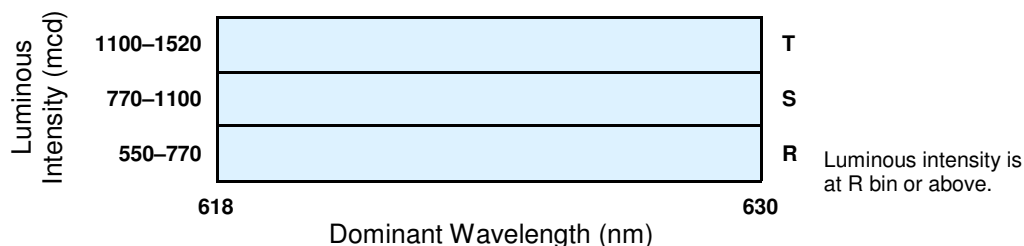

Notes:


1. All ranks will be included per delivery, rank ratio will be based on the chip distribution.
2. To designate luminous intensity ranks, please contact OPTEK.
3. Pb content <1000 PPM.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


# Oval Red LED Lamp (5 mm)

查询"OVLHRKD8"供应商  
OVLHRKD8


## Typical Electro-Optical Characteristics Curves

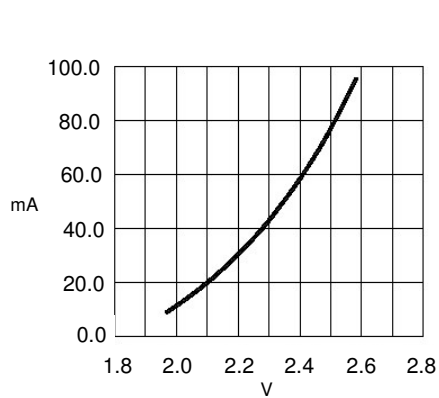


Forward Current vs Forward Voltage

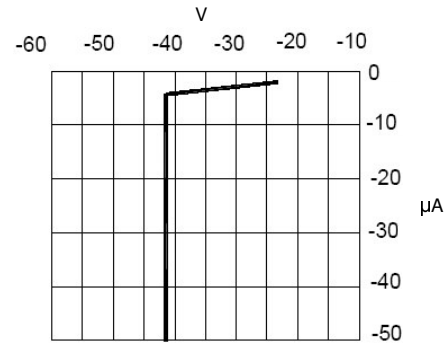


Reverse Current vs Reverse Voltage

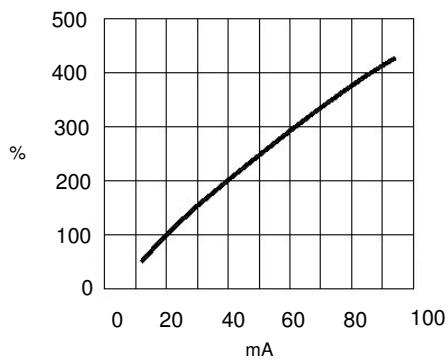


Relative Luminous Intensity vs Forward Current

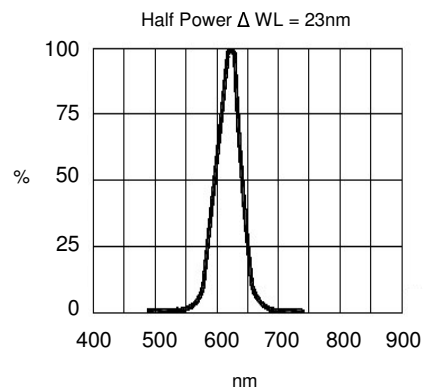

Relative Luminous Intensity vs Wavelength

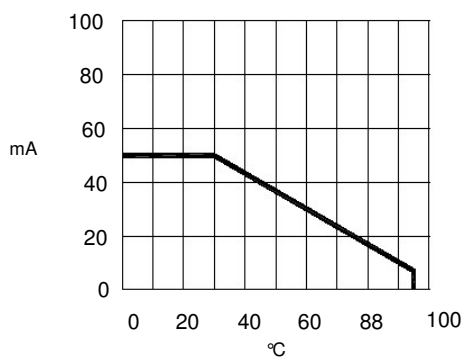

Maximum Forward DC Current vs Ambient Temperature

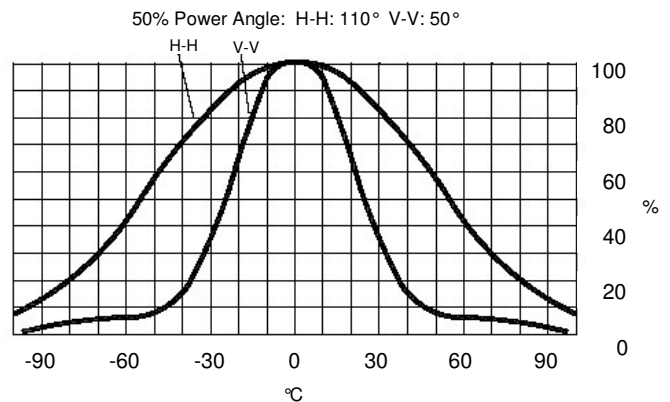

Far Field Pattern

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.