

EC2SA

SERIES

NEW



2 WATT REGULATED DC-DC CONVERTERS



Features

- 2W Isolated Output
- SIP-8 Package
- Efficiency to 83%
- 2:1 Input Range
- Regulated Outputs
- Remote On/Off Control
- 1500VDC Isolation
- Continuous Short Circuit Protection

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	CASE
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC2SA-05S33	4.5-9.0 VDC	3.3VDC	0 mA	500 mA	60 mA	458 mA	72	SIP-8
EC2SA-05S05		5VDC	0 mA	400 mA		526 mA	76	
EC2SA-05S12		12VDC	0 mA	167 mA		507 mA	79	
EC2SA-05S15		15VDC	0 mA	134 mA		503 mA	80	
EC2SA-05D05		±5VDC	±0 mA	±200 mA		526 mA	76	
EC2SA-05D12		±12VDC	±0 mA	±83 mA		498 mA	80	
EC2SA-05D15		±15VDC	±0 mA	±67 mA		503 mA	80	
EC2SA-12S33	9-18 VDC	3.3VDC	0 mA	500 mA	30 mA	186 mA	74	SIP-8
EC2SA-12S05		5VDC	0 mA	400 mA		214 mA	78	
EC2SA-12S12		12VDC	0 mA	167 mA		206 mA	81	
EC2SA-12S15		15VDC	0 mA	134 mA		204 mA	82	
EC2SA-12D05		±5VDC	±0 mA	±200 mA		208 mA	80	
EC2SA-12D12		±12VDC	±0 mA	±83 mA		202 mA	82	
EC2SA-12D15		±15VDC	±0 mA	±67 mA		204 mA	82	
EC2SA-24S33	18-36 VDC	3.3VDC	0 mA	500 mA	18 mA	90 mA	76	SIP-8
EC2SA-24S05		5VDC	0 mA	400 mA		107 mA	78	
EC2SA-24S12		12VDC	0 mA	167 mA		103 mA	81	
EC2SA-24S15		15VDC	0 mA	134 mA		102 mA	82	
EC2SA-24D05		±5VDC	±0 mA	±200 mA		107 mA	78	
EC2SA-24D12		±12VDC	±0 mA	±83 mA		102 mA	81	
EC2SA-24D15		±15VDC	±0 mA	±67 mA		102 mA	82	
EC2SA-48S33	36-75 VDC	3.3VDC	0 mA	500 mA	9 mA	46 mA	74	SIP-8
EC2SA-48S05		5VDC	0 mA	400 mA		53 mA	78	
EC2SA-48S12		12VDC	0 mA	167 mA		51 mA	82	
EC2SA-48S15		15VDC	0 mA	134 mA		50 mA	83	
EC2SA-48D05		±5VDC	±0 mA	±200 mA		53 mA	78	
EC2SA-48D12		±12VDC	±0 mA	±83 mA		50 mA	83	
EC2SA-48D15		±15VDC	±0 mA	±67 mA		51 mA	82	

NOTE: 1. Nominal Input Voltage 5, 12, 24 or 48 VDC

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....	5V.....	4.5-9V
	12V.....	9-18V
	24V.....	18-36V
	48V.....	36-75V

Input Filter.....	Capacitive
Remote on/off control :	
Module On.....	< 1.2VDC or Open Circuit
Module Off.....	5.5...15VDC
Module Off (input idle current).....	1mA max.


OUTPUT SPECIFICATIONS:

Voltage Accuracy :	±1.5% max.	
Voltage Balance(Dual)	±1.0% max.	
Cross regulation(Dual)¹.....Asymmetrical load 25%/100%.....	±5.0% max.	
Transient Response: 25% Step Load Change		
Error Band	±6% Vout nominal	
Recovery Time	< 500us	
Ripple & Noise, 20MHz BW.....	75mV pk-pk. max.	
Temperature Coefficient.....	±0.03%/°C	
Line Regulation².....	±0.5% max.	
Load Regulation³.....Single.....	±0.5% max.	
	Dual.....	±1.0% max.
Output Short Circuit Protection	Continuous	

GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage	1500VDC min.
Isolation Resistance	10 ⁹ ohm min.
Switching Frequency	100KHz min.
Operating Ambient Temperature.....	-40°C to +85°C
De-rating, Above 85°C	Linearly to Zero power at 100°C
Case Temperature⁴.....	100°C max.
Cooling.....	Natural Convection
Storage Temperature	-55°C to +125°C
Dimensions	0.86×0.36×0.44 inches(21.80×9.20×11.10 mm)
Case Material	Non-Conductive Black Plastic
Weight.....	4.8g

EC2SA Series Derating Curve

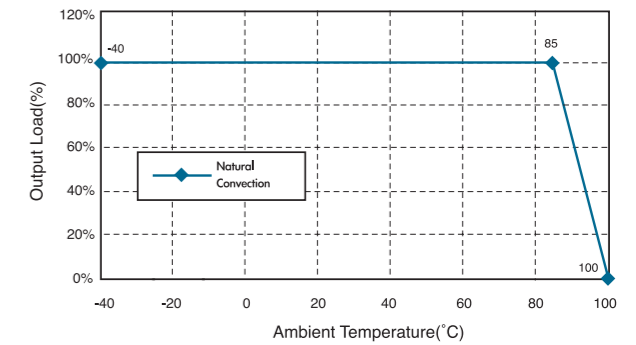

NOTE:


1. For asymmetric loading, Both channels must be at 25% load or more.
2. Measured From High Line to Low Line
3. Measured From Full Load to 10% Load
4. Maximum case temperature under any operating condition should not exceed 100°C.

PIN CONNECTION

Pin	Single Output	Dual Outputs
1	-V Input	-V Input
2	+V Input	+V Input
3	CTRL	CTRL
5	NC	NC
6	+V Output	+V Output
7	-V Output	Common
8	NC	-V Output

CASE A

All Dimensions In Inches(mm)
 Tolerance Inches: .xx= ±.02, .xxx= ±.002
 Millimeters: .x= ±.5, .xx= ±.05

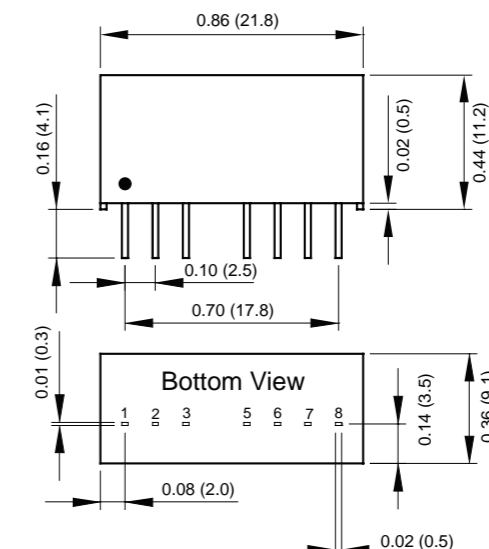

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.