

CFC0301 Series

Medium Power GaAs FETs



CFC0301 Series

Product Specifications
May 1994

(1 of 2)

Medium Power GaAs FETs

Features


- ☐ High Gain
- ☐ +23 dBm Power Output
- ☐ Ion Implanted Material
- ☐ 100 Mil Stripline Flange Package

Applications

- ☐ Point-to-Point Radios
- ☐ Satellites
- ☐ Commercial Applications
- ☐ Defense Electronics

Description

The CFC0301-P series is a family of high-gain FETs intended for driver amplifier applications in high-power systems, and output stage usage in medium power applications at power levels up to 0.25 watts. Manufactured in Celeritek's

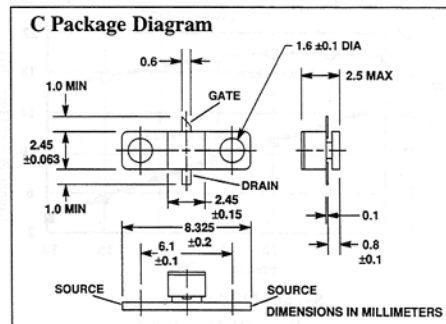

proprietary 0.25 micron ion-implanted process, this family of devices is assembled in an industry standard 100 mil flange package.

Specifications (TA = 25°C)

Parameter	Vds (V)	Bias Ids (mA)	Frequency (GHz)	Units	Performance Specifications			
					Grade	Min	Typ	Max
P _{1dB}	6.0	80.0	12.0	dBm	P1	22.5	23.0	—
					P2	22.0	22.5	—
					P3	21.5	22.5	—
G _L	6.0	80.0	12.0	dB	P1	9.5	10.0	—
					P2	9.0	9.5	—
					P3	8.0	9.0	—
IS ₂₁ ²	6.0	80.0	2.0	dB			15.5	
			10.0	dB			7.6	
			18.0	dB			-1.1	
NF _{opt}	6.0	80.0	12.0	dB			2.6	
g _m	Vds = 3.0V	Vgs = 0V		mS			120	
I _{dss}	Vds = 3.0V	Vgs = 0V		mA		120	180	240
V _p	Vds = 3.0V	Ids = 1mA		Volts		-0.7	-1.3	-2.5
BV _{gd}	Igd = 100 μA			Volts		-5.5	-8.0	
R _{th}				°C/W			100	

Absolute Maximum Ratings

Parameter	Symbol	Rating
Drain-Source Voltage	Vds	8V
Gate-Source Voltage	Vgs	-5V
Drain Current	Ids	1.6W
Continuous Dissipation	Pt	1.6W
RF Power In	Pin	+20 dBm
Channel Temperature	Tch	175°C
Storage Temperature	Tstg	-65°C to +175°C





Typical Noise Parameters (Vds = 6V, Ids = 80 mA)

Freq (GHz)	NF _{opt}	G _A (dB)	Gamma Mag	Opt Ang	Rn/50
2.0	0.34	18.4	0.88	56	0.65
4.0	0.72	18.4	0.80	103	0.43
6.0	1.11	14.8	0.73	143	0.30
8.0	1.55	13.0	0.65	179	0.24
10.0	2.06	11.2	0.58	-146	0.26
12.0	2.64	9.4	0.51	-112	0.36
14.0	3.28	7.6	0.46	-75	0.54
16.0	3.98	5.9	0.42	-34	0.79
18.0	4.75	4.2	0.40	14	1.12

CFC0301 Series

Product Specifications - May 1994
(2 of 2)

Typical Performance (TA = 25°C)

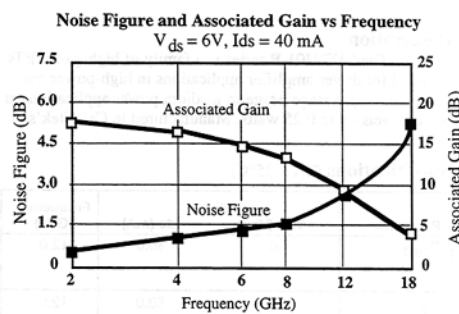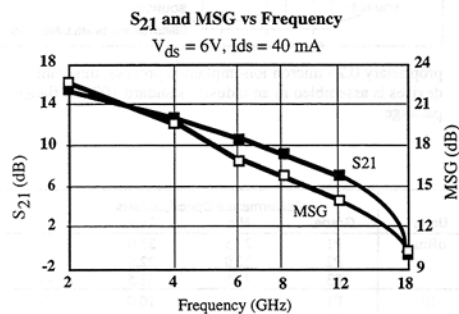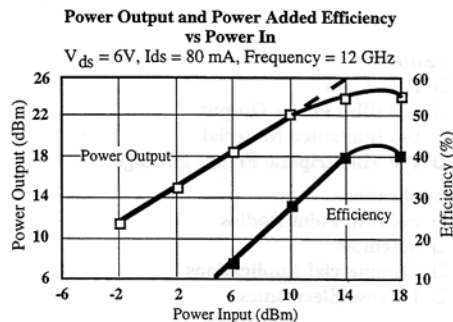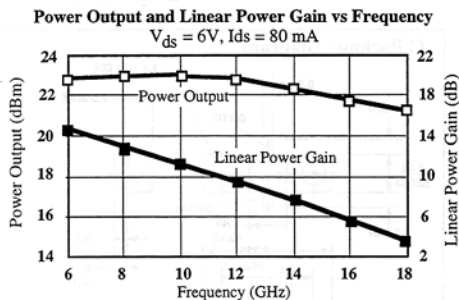

Typical Scattering Parameters (TA = 25°C, V_{ds} = 6V, I_{ds} = 80mA)

CFC0301

Frequency (GHz)	S ₁₁			S ₂₁			S ₁₂			S ₂₂			MSG (dB)
	(Mag)	(Ang)	(dB)	(Mag)	(Ang)	(dB)	(Mag)	(Ang)	(dB)	(Mag)	(Ang)	(dB)	
2.0	0.90	-81	15.5	5.97	117	-30.5	0.03	45	-30.5	0.37	-56	22.4	
4.0	0.90	-131	12.7	4.30	76	-26.0	0.05	21	-26.0	0.41	-86	19.5	
6.0	0.70	-162	10.3	3.27	43	-26.0	0.05	3	-26.0	0.42	-108	17.9	
8.0	0.69	162	8.9	2.80	11	-24.4	0.06	-12	-24.4	0.43	-129	16.7	
10.0	0.67	129	7.6	2.40	-21	-24.4	0.06	-40	-24.4	0.39	-151	15.8	
12.0	0.62	98	7.1	2.27	-54	-21.9	0.08	-57	-21.9	0.45	180	14.8	
14.0	0.53	65	6.2	2.04	-92	-20.9	0.09	-91	-20.9	0.50	148	13.5	
16.0	0.35	39	4.4	1.66	-134	-20.0	0.10	-130	-20.0	0.58	113	12.1	
18.0	0.40	35	-1.1	0.88	-177	-21.9	0.08	159	-21.9	0.65	72	10.5	

Celertek reserves the right to make changes without further notice to any products herein. Celertek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Celertek assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Celertek does not convey any license under its patent rights nor the rights of others. Celertek products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Celertek product could create a situation where personal injury or death may occur. Should Buyer purchase or use Celertek products for any such unintended or unauthorized application, Buyer shall indemnify and hold Celertek and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Celertek was negligent regarding the design or manufacture of the part. Celertek is a registered trademark of Celertek, Inc. Celertek, Inc. is an Equal Opportunity/Affirmative Action Employer.