

D TYPE CONNECTORS LOW COST

查询"DBCHDMSS44S"供应商

- 15, 26, 44, 62 or 78 way
- Stamped & Formed Contacts
- Selective Gold Plated Contacts
- Tin Plated Metal Housing
- Low cost

HIGH DENSITY SOLDER PIN STRAIGHT



SPECIFICATION

Mechanical:

Insulator: PBT +30% Glass Fibre
UL94V-0

Pin contacts: Phosphor Bronze
Gold Plated

Shell: Steel, SPCC
Nickel and Tin Plated

Electrical Data:

Rated Voltage: 350V AC

Rated Current: 5A


With stand Voltage: 500V AC(rms)

Insulation Resistance: Over 1000 MΩ


Contact Resistance: 5 MΩ at 1A

Temperature: -20 °C to 100 °C

OUTLINE DRAWING

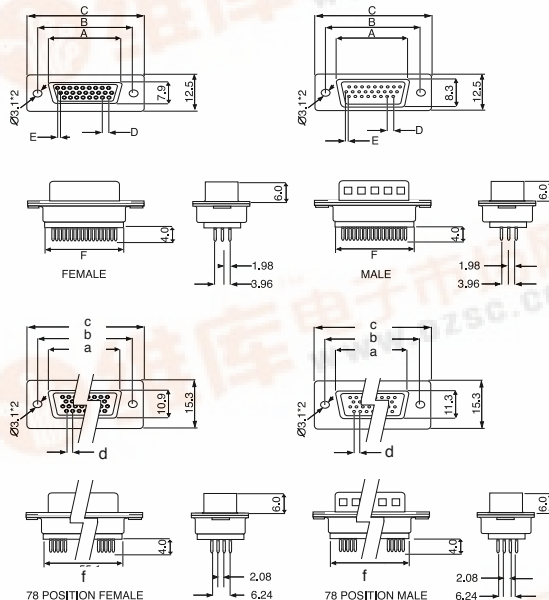

P.C.BOARD LAYOUT PATTERN

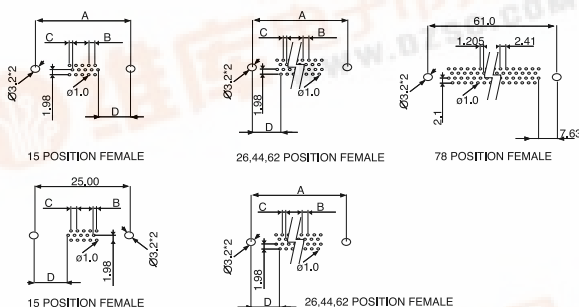

POSITION	A	B	C	D	E	F
15 F	16.30	25.00	30.8	2.29	1.14	19.2
26 F	24.60	33.30	39.2	2.29	1.14	27.7
44 F	38.30	47.10	53.1	2.29	1.14	41.1
62 F	54.80	63.50	69.4	2.41	1.20	57.3
78F	67.0	61.0	67.0	2.41	-	55.1

POSITION	A	B	C	D	E	F
15 M	16.92	25.00	30.8	2.29	1.14	19.2
26 M	25.25	33.30	39.2	2.29	1.14	27.7
44 M	38.96	47.10	53.1	2.29	1.14	41.1
62 M	55.42	63.50	69.4	2.41	1.20	57.3
78M	52.81	61.0	67.0	2.41	-	55.1

P.C.BOARD LAYOUT

POSITION	A	B	C	D	
15 M/F	25.0	2.29	1.145	7.04	
26 M/F	33.3	2.29	1.145	6.88	
44 M/F	47.1	2.29	1.145	6.88	
62 M/F	63.5	2.41	1.205	7.00	

ORDERING INFORMATION

DBC

Dubilier
Connectors

HD

Series
HD= High
Density
Stamped &
Formed

F

Connector Type
M = Male
F = Female

SS

Contact Style
SS = Solder Straight

26

N° of Ways
15 = 15ways
26 = 26ways
44 = 44ways
62 = 62ways
78 = 78ways

S

Contact
Plating
S= Selective
Plating

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn