

HIGH FREQUENCY MAGNETIC

[查询"T-1037"供应商](#)

UL 1459 Recognized



Turns Ratio ($\pm 5\%$)

1 : 1CT

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	2.3		mHy
Leakage Inductance		2.0	μ Hy
Interwinding Capacitance ($C_{w/w}$)		25	pF
Primary DC Resistance		0.98	ohms
Secondary DC Resistance		1.18	ohms
Isolation (HI-POT)	500		V _{RMS}

TEST CONDITIONS:

Oscillation Voltage = 50mV



Oscillation Frequency = 10.0 KHz

Inductance measured on Primary winding. Pins 1 - 3.

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Temperature Characteristics:
-40° C to +85° C

SCHEMATIC

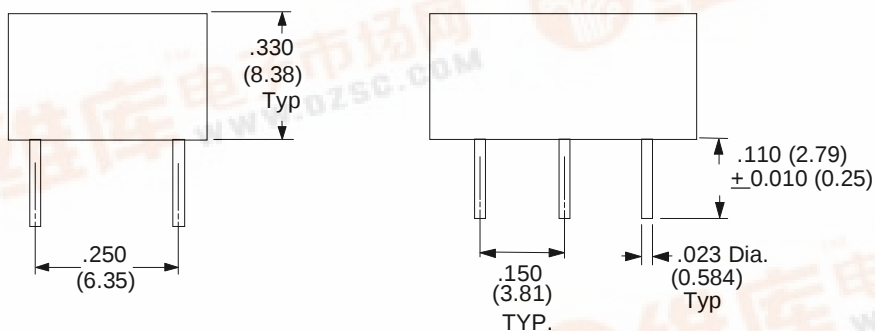

PHYSICAL DIMENSIONS

All dimensions in inches (mm):

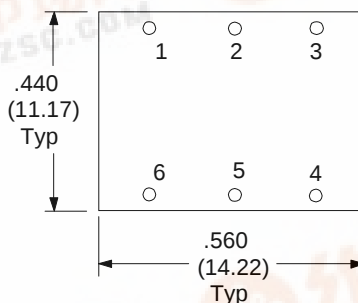

RHOMBUS P/N: **T-1474**

CUST P/N:

NAME:

DATE: **12/11/01**

SHEET: 1 OF 1



Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649

Phone: (714) 898-0960

FAX: (714) 896-0971

www.rhombus-ind.com