


Surface Mount ESD Protection Diodes



MARKING (example only)

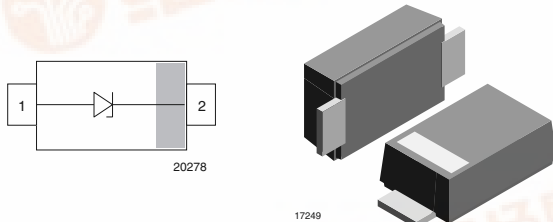

Bar = cathode marking

Y = type code (see table below)

X = date code

FEATURES

- For surface mounted applications
- Low-profile package
- Optimized for LAN protection applications
- Ideal for ESD protection of data lines in accordance with IEC 61000-4-2 (IEC 801-2)
- Ideal for EFT protection of data lines in accordance with IEC 61000-4-4 (IEC 801-4)
- ESD-protection acc. IEC 61000-4-2
± 30 kV contact discharge
± 30 kV air discharge
- Low incremental surge resistance, excellent clamping capability
- 200 W peak pulse power capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.01 %
- Very fast response time
- High temperature soldering guaranteed: 260 °C/10 s at terminals
- e3 - Sn
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



RoHS
COMPLIANT
HALOGEN
FREE

ORDERING INFORMATION

SMF5V0A-M-xx

GS08 = 3K per 7" reel (8 mm tape), 30K/box

GS18 = 10K per 13" reel (8 mm tape), 50K/box

Environmental suffix -M- defines halogen-free

Part number

PACKAGE DATA

DEVICE NAME	PACKAGE NAME	TYPE CODE	WEIGHT	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS
SMF5V0A-M	SMF	NE	15 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	260 °C/10 s at terminals
SMF6V5A-M		NK				
SMF7V0A-M		NM				
SMF7V5A-M		NP				
SMF8V0A-M		NR				
SMF8V5A-M		NT				
SMF9V0A-M		NV				
SMF10A-M		NX				
SMF11A-M		NZ				
SMF12A-M		OE				
SMF13A-M		OG				
SMF14A-M		OK				
SMF15A-M		OM				
SMF16A-M		OP				
SMF17A-M		OR				
SMF18A-M		OT				
SMF20A-M	SMF	OV	15 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	260 °C/10 s at terminals
SMF22A-M		OX				
SMF24A-M		OZ				
SMF24A-M		OZ				

SMF5V0A-M to SMF51A-M

Vishay Semiconductor

Surface Mount ESD Protection
Diodes



PACKAGE DATA						
DEVICE NAME	PACKAGE NAME	TYPE CODE	WEIGHT	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS
SMF26A-M	SMF	PE	15 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	260 °C/10 s at terminals
SMF28A-M		PG				
SMF30A-M		PK				
SMF33A-M		PM				
SMF36A-M		PP				
SMF40A-M		PR				
SMF43A-M		PT				
SMF45A-M		PV				
SMF48A-M		PX				
SMF51A-M		PZ				

ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified)				
PARAMETER	TEST CONDITIONS	SYMBOL	VALUE	UNIT
Peak pulse current	t _p = 10/1000 μs waveform acc. IEC 61000-4-5	I _{PPM}	see "Electrical Characteristics"	A
Peak pulse power	t _p = 10/1000 μs waveform acc. IEC 61000-4-5	P _{PP}	200	W
	t _p = 8/20 μs waveform acc. IEC 61000-4-5		1000	W
Peak forward surge current	8.3 ms single half sine-wave	I _{FSM}	20	A
ESD immunity	Contact discharge acc. IEC 61000-4-2; 10 pulses	V _{ESD}	± 30	kV
	Air discharge acc. IEC 61000-4-2; 10 pulses		± 30	kV
Thermal resistance	Mounted on epoxy glass PCB with 3 mm x 3 mm, Cu pads (≥ 40 μm thick)	R _{thJA}	180	K/W
Forward clamping voltage	I _F = 12 A	V _F	3.5	V
Operating temperature	Junction temperature	T _J	- 55 to + 150	°C
Storage temperature		T _{STG}	- 55 to + 150	°C

ELECTRICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)								
PART NUMBER	REVERSE BREAKDOWN VOLTAGE at I _T , t _p ≤ 5 ms	TEST CURRENT	REVERSE WORKING VOLTAGE	REVERSE CURRENT at V _{RWM}	MAXIMUM PEAK PULSE CURRENT t _p = 10/1000 s	REVERSE CLAMPING VOLTAGE at I _{PPM}	CAPACITANCE at V _R = 0 V, f = 1 MHz	PROTECTION PATHS
	V _{BR} MIN. (V)	I _T (mA)	V _{RWM} (V)	I _R (μA)	I _{PPM} (A)	V _C (V)	C _D TYP. (pF)	N _{channel}
SMF5V0A-M	6.40	10	5	400	21.7	9.2	1030	1
SMF6V0A-M	6.67	10	6	400	19.4	10.3	1010	1
SMF6V5A-M	7.22	10	6.5	250	17.9	11.2	850	1
SMF7V0A-M	7.78	10	7	100	16.7	12	750	1
SMF7V5A-M	8.33	1	7.5	50	15.5	12.9	730	1
SMF8V0A-M	8.89	1	8	25	14.7	13.6	670	1
SMF8V5A-M	9.44	1	8.5	10	13.9	14.4	660	1
SMF9V0A-M	10	1	9	5	13.5	15.4	620	1
SMF10A-M	11.1	1	10	2.5	11.8	17	570	1
SMF11A-M	12.2	1	11	2.5	11	18.2	460	1
SMF12A-M	13.3	1	12	2.5	10.1	19.9	440	1
SMF13A-M	14.4	1	13	1	9.3	21.5	420	1
SMF14A-M	15.6	1	14	1	8.6	23.2	370	1
SMF15A-M	16.7	1	15	1	8.2	24.4	350	1
SMF16A-M	17.8	1	16	1	7.7	26	340	1
SMF17A-M	18.9	1	17	1	7.2	27.6	310	1

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified)								
PART NUMBER	REVERSE BREAKDOWN VOLTAGE at I_T , $t_p \leq 5\text{ ms}$	TEST CURRENT	REVERSE WORKING VOLTAGE	REVERSE CURRENT at V_{RWM}	MAXIMUM PEAK PULSE CURRENT $t_p = 10/1000\text{ s}$	REVERSE CLAMPING VOLTAGE at I_{PPM}	CAPACITANCE at $V_R = 0\text{ V}$, $f = 1\text{ MHz}$	PROTECTION PATHS
	$V_{BR}\text{ MIN. (V)}$	$I_T\text{ (mA)}$	$V_{RWM}\text{ (V)}$	$I_R\text{ (}\mu\text{A)}$	$I_{PPM}\text{ (A)}$	$V_C\text{ (V)}$	$C_D\text{ TYP. (pF)}$	$N_{channel}$
SMF18A-M	20	1	18	1	5.8	29.2	305	1
SMF20A-M	22.2	1	20	1	6.2	32.4	207	1
SMF22A-M	24.4	1	22	1	5.6	35.5	265	1
SMF24A-M	26.7	1	24	1	5.1	38.9	240	1
SMF26A-M	28.9	1	26	1	4.8	42.1	225	1
SMF28A-M	31.1	1	28	1	4.4	45.4	210	1
SMF30A-M	33.3	1	30	1	4.1	48.4	205	1
SMF33A-M	36.7	1	33	1	3.8	53.3	190	1
SMF36A-M	40	1	36	1	3.4	58.1	180	1
SMF40A-M	44.4	1	40	1	3.1	64.5	165	1
SMF43A-M	47.8	1	43	1	2.9	69.4	160	1
SMF45A-M	50	1	45	1	2.8	72.7	155	1
SMF48A-M	53.3	1	48	1	2.6	77.4	150	1
SMF51A-M	56.7	1	51	1	2.4	82.4	145	1

TYPICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified)

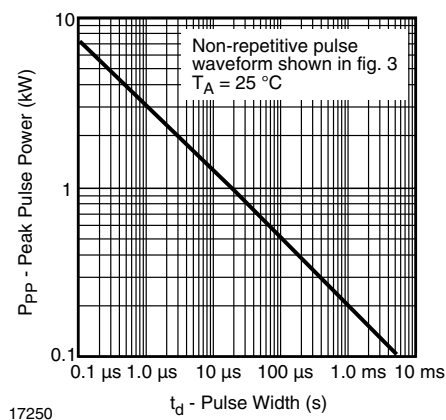


Fig. 1 - Peak Pulse Power Rating

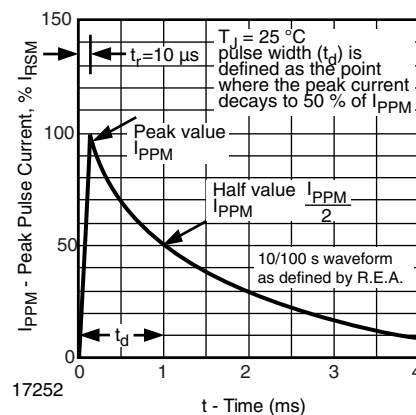


Fig. 3 - Pulse Waveform

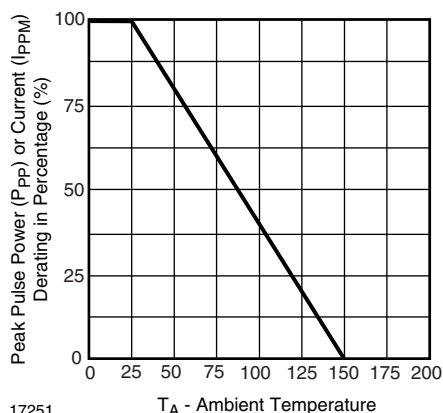


Fig. 2 - Pulse Derating Curve


SMF5V0A-M to SMF51A-M

Vishay Semiconductor


Surface Mount ESD Protection
Diodes



PACKAGE DIMENSIONS in millimeters (inches): **SMF**

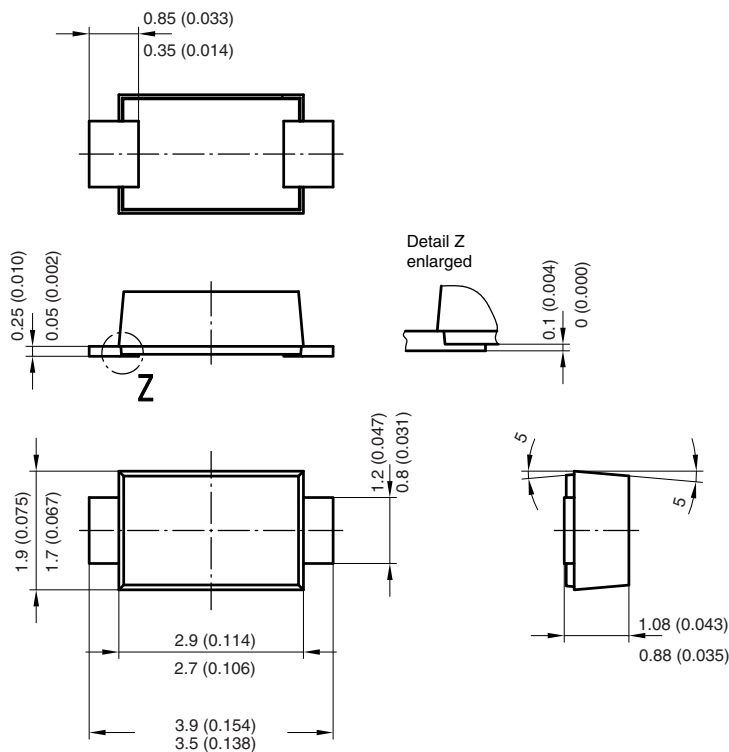


Foot print recommendation:

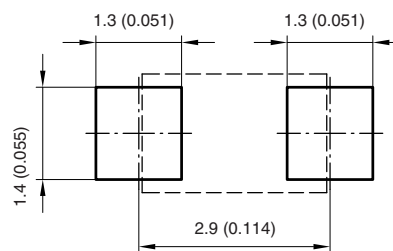

Created - Date: 15. February 2005
Rev. 3 - Date: 13. March 2007
Document no.: S8-V-3915.01-001 (4)
17247

BLISTERTAPE DIMENSIONS in millimeters (inches)

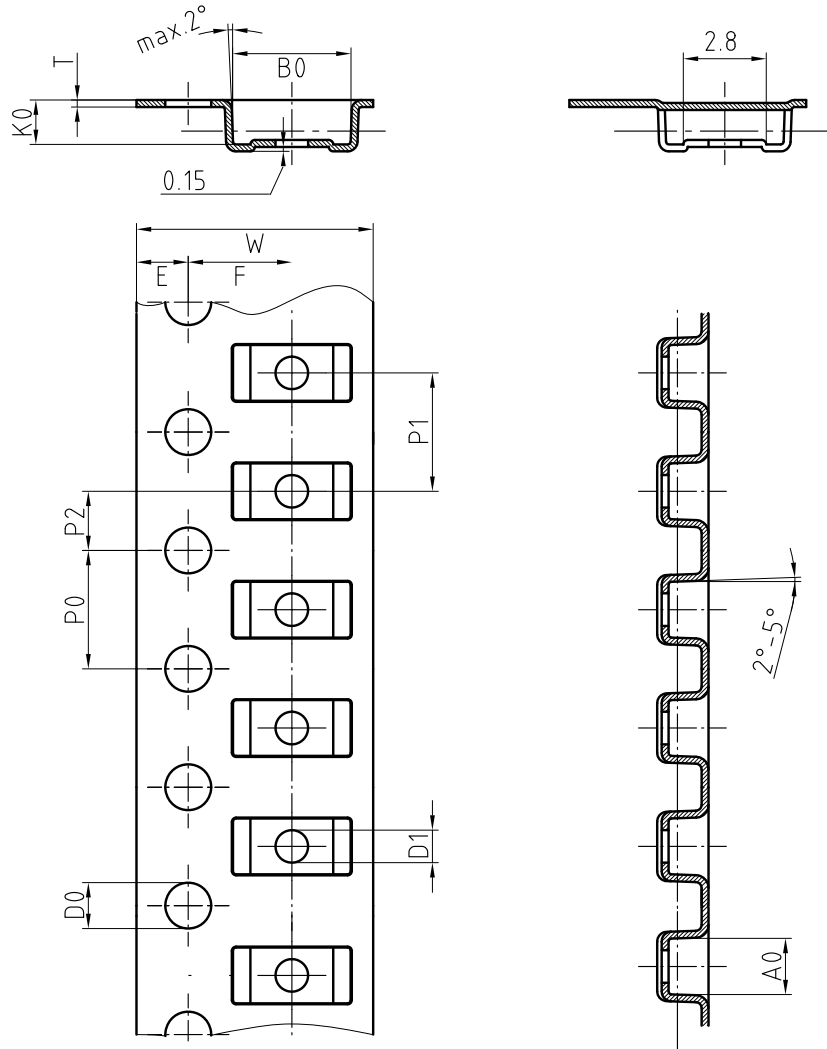

Mat:	A0	B0	K0	W	T	P0	P2	P1	D0	D1	E	F
PS	1.9	4.0	1.5	8.0	0.235	4.0	2.0	4.0	1.5	1	1.75	3.5

Document-No.: S8-V-3717.02-001 (3)

18513

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.