


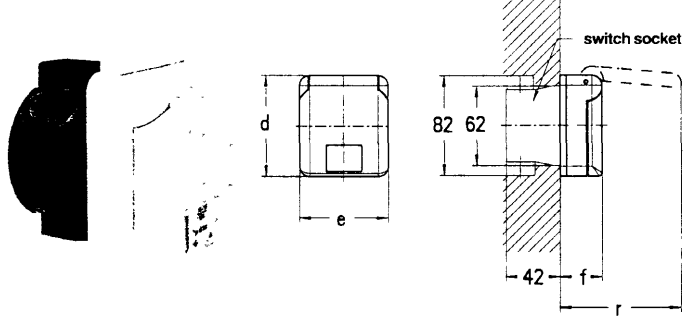





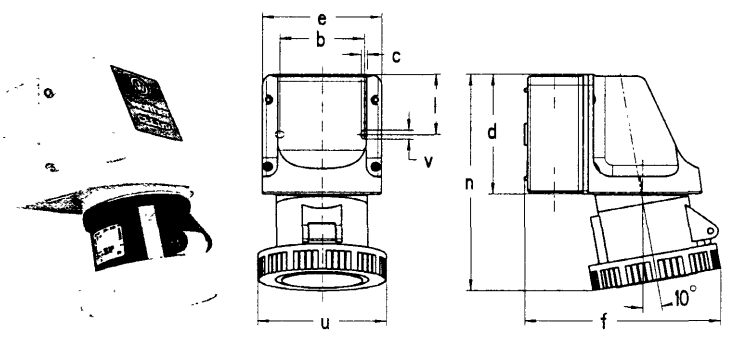




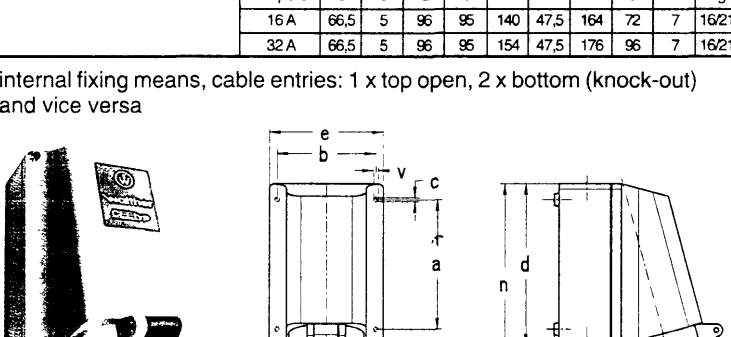





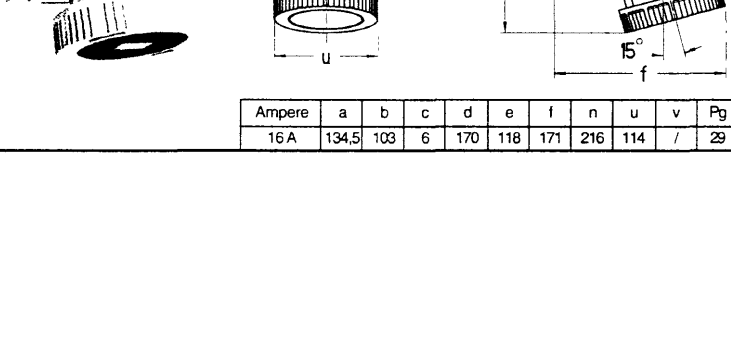






723 2410.
723 2457.

查询"119406"供应商

Amp	Volt	Hz	Ident. colour + h	Part No.	Wall socket outlets	2 P + 	IEC/EN 60 309		g	EAN-No 4015609...																																		
<p> IP44</p>					<p>mondo small version, flush-type, RAL 1013 pearl white with flush-type socket outlet, with plaster thickness adjustment</p>																																							
16	230	50/60	6	418 306						EAN-No 4015609...																																		
	110	50/60	4	418 304																																								
	400	50/60	9	418 309																																								
230	50/60	6	418 306RW	RW = clear white, RAL 9010																																								
230	50/60	6	418 306LG	LG = light grey, RAL 7035																																								
					<table border="1"> <thead> <tr> <th>Ampère</th> <th>d</th> <th>e</th> <th>f</th> <th>r</th> </tr> </thead> <tbody> <tr> <td>16 A</td> <td>80</td> <td>70</td> <td>33</td> <td>96</td> </tr> </tbody> </table>		Ampère	d	e	f	r	16 A	80	70	33	96																												
Ampère	d	e	f	r																																								
16 A	80	70	33	96																																								
<p> IP67</p>					<p>internal fixing means, 2 cable entries both, top and bottom (knock-out)</p>																																							
16	230	50/60	6	119 306						EAN-No 4015609...																																		
	110	50/60	4	119 304																																								
	400	50/60	9	119 309																																								
<p>cable gland Pg 16 enclosed</p>																																												
32	230	50/60	6	139 306						EAN-No 4015609...																																		
	110	50/60	4	139 304																																								
	400	50/60	9	139 309																																								
<p>cable gland Pg 21 enclosed</p>																																												
					<table border="1"> <thead> <tr> <th>Ampère</th> <th>b</th> <th>c</th> <th>d</th> <th>e</th> <th>f</th> <th>l</th> <th>n</th> <th>u</th> <th>v</th> <th>Pg</th> </tr> </thead> <tbody> <tr> <td>16 A</td> <td>66,5</td> <td>5</td> <td>96</td> <td>95</td> <td>140</td> <td>47,5</td> <td>164</td> <td>72</td> <td>7</td> <td>16/21</td> </tr> <tr> <td>32 A</td> <td>66,5</td> <td>5</td> <td>96</td> <td>95</td> <td>154</td> <td>47,5</td> <td>176</td> <td>96</td> <td>7</td> <td>16/21</td> </tr> </tbody> </table>		Ampère	b	c	d	e	f	l	n	u	v	Pg	16 A	66,5	5	96	95	140	47,5	164	72	7	16/21	32 A	66,5	5	96	95	154	47,5	176	96	7	16/21					
Ampère	b	c	d	e	f	l	n	u	v	Pg																																		
16 A	66,5	5	96	95	140	47,5	164	72	7	16/21																																		
32 A	66,5	5	96	95	154	47,5	176	96	7	16/21																																		
<p> IP67</p>					<p>internal fixing means, cable entries: 1 x top open, 2 x bottom (knock-out) and vice versa</p>																																							
63	230	50/60	6	169 306						EAN-No 4015609...																																		
	110	50/60	4	169 304																																								
	400	50/60	9	169 309																																								
					<table border="1"> <thead> <tr> <th>Ampère</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> <th>e</th> <th>f</th> <th>n</th> <th>u</th> <th>v</th> <th>Pg</th> </tr> </thead> <tbody> <tr> <td>16 A</td> <td>134,5</td> <td>103</td> <td>6</td> <td>170</td> <td>118</td> <td>171</td> <td>216</td> <td>114</td> <td>/</td> <td>29</td> </tr> </tbody> </table>		Ampère	a	b	c	d	e	f	n	u	v	Pg	16 A	134,5	103	6	170	118	171	216	114	/	29																
Ampère	a	b	c	d	e	f	n	u	v	Pg																																		
16 A	134,5	103	6	170	118	171	216	114	/	29																																		