

QUADRATURE HYBRID MODEL SMQ-CA38

OPTIMIZED BANDWIDTH


127.72 MHz

SPECIFICATIONS

Operating Frequency:	127.72 MHz	Input Power Rating:	100 mW (Max)
Insertion Loss:	0.2 dB (Typ)/0.4 dB (Max)	Impedance:	50 Ohms
Amplitude Unbalance:	0.2 dB (Max)	VSWR :	1.3:1 (Typ)
Phase Unbalance:	2° (Max)	Operating Temp. Range:	-30° to +85°C
Isolation:	20 dB (Typ)/17 dB (Min)		



MECHANICAL OUTLINE: 129

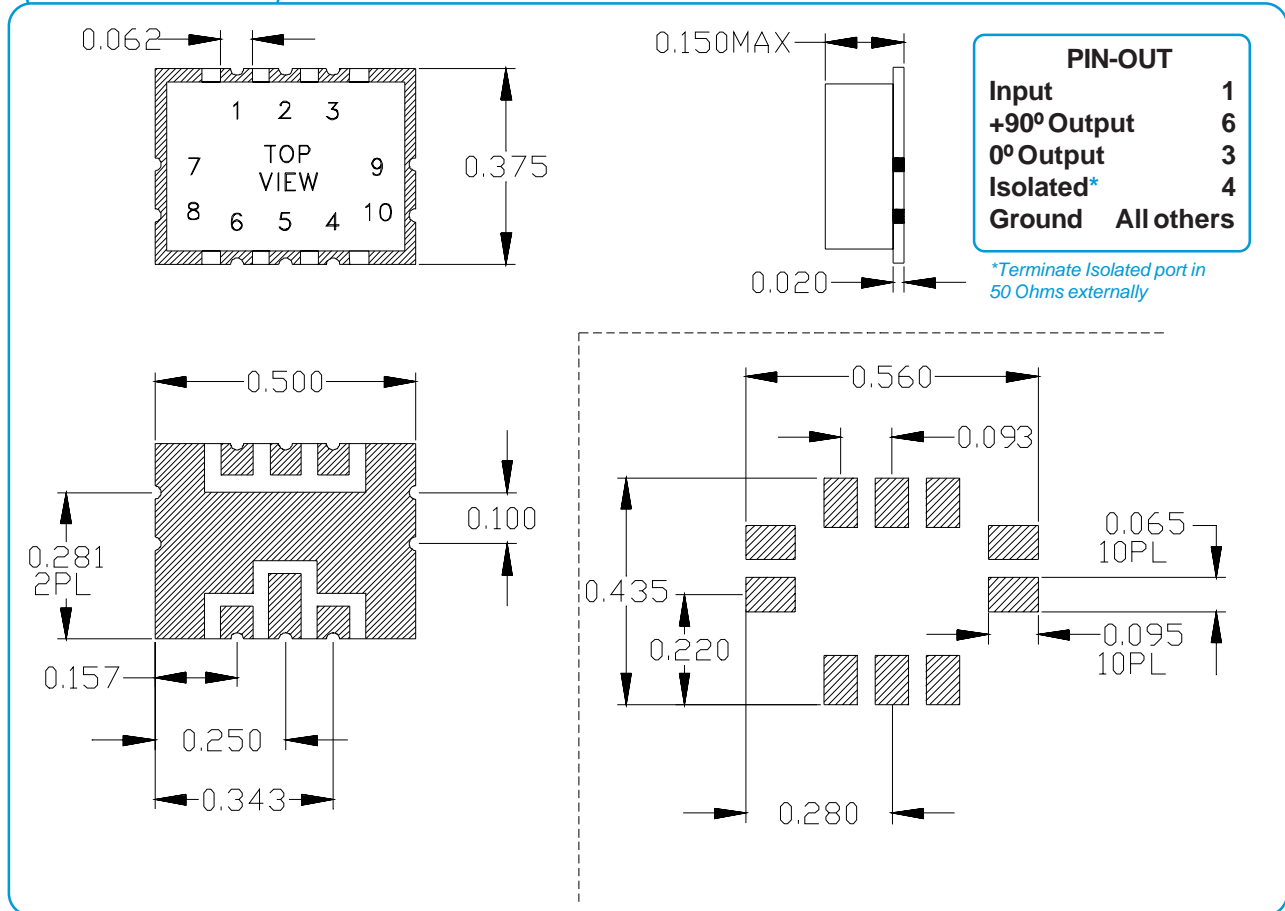

QUADRATURE HYBRID MODEL SMQ-CA38

OPTIMIZED BANDWIDTH

127.72 MHz

PERFORMANCE PLOTS

