

#### INTRODUCTION:

Adam Tech ADC Series DC Power Jacks are a complete line of miniature and sub-miniature power jacks primarily used for the transmission of wall current transformed to DC power, for detached and hand held instruments. Adam Tech power jacks are manufactured with a variety of center pin sizes for all standard applications including 1.00mm, 1.30mm, 2.00mm and 2.50mm. Our contact is designed using a wide spring grade plated copper alloy for exceptional plug retention and low contact resistance.

#### FEATURES:

- Low Profile designs
- Superior contact system
- Exceptional plug retention
- Choice of Center pin sizes
- Hi Temp Versions
- Hi Current Versions

#### MATING PLUGS:

All industry standard 1.00mm, 1.30mm, 2.00mm, 2.35mm and 2.50mm Plugs.

#### SPECIFICATIONS:

##### Material:

Standard insulator: PBT Glass reinforced, rated UL94V-0  
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0  
Insulator Color: Black  
Center Pin: Brass, Nickel plated  
Contacts: Copper alloy

##### Contact Plating:

Silver over nickel underplate

##### Electrical:

Operating voltage: 12V DC max.  
Current rating: 1 Amp max.  
Contact resistance: 30 mΩ max. initial  
Insulation resistance: 50 MΩ min.  
Dielectric withstanding voltage: 250V AC for 1 minute

##### Mechanical:

Insertion force: 3 kg max.  
Withdrawal force: 0.3 kg min  
Mating durability: 5000 cycles min.

##### Temperature Rating:

Operating temperature: -25°C to +85°C  
Soldering process temperature:  
Standard insulator: 235°C  
Hi-Temp insulator: 260°C


#### PACKAGING:

Anti-ESD plastic bags or Tape and Reel



#### APPROVALS AND CERTIFICATIONS:

UL Recognized File No. E224053  
CSA Certified File No. LR1578596

**HI-TEMP  
INSULATOR  
AVAILABLE**

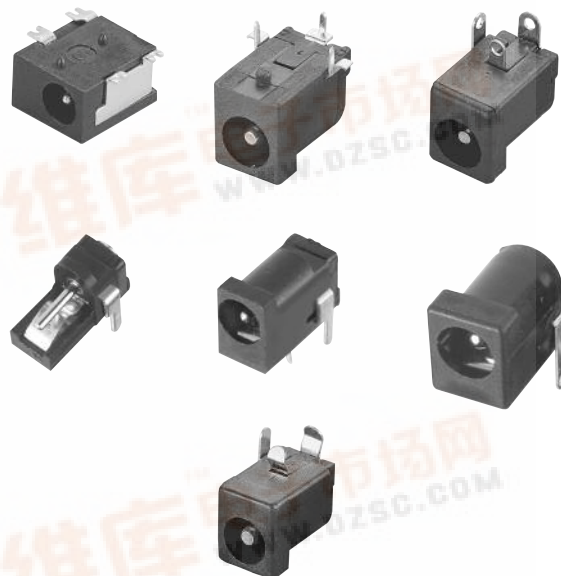

#### ORDERING INFORMATION

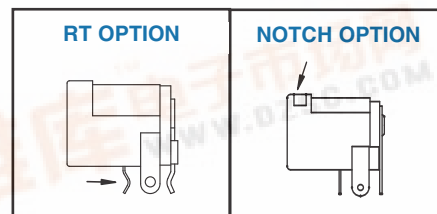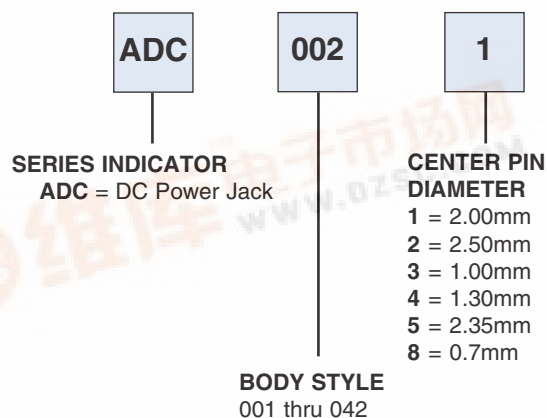

#### OPTIONS:

Add designator(s) to end of part number

**RT** = PC Board Retention Feature  
(Type 007 & 009 only)

**HT** = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C

**N** = Notch option, (ADC-002 only)

**ADCH** = DC Power Jack Hi-Current 5 Amp Version

