


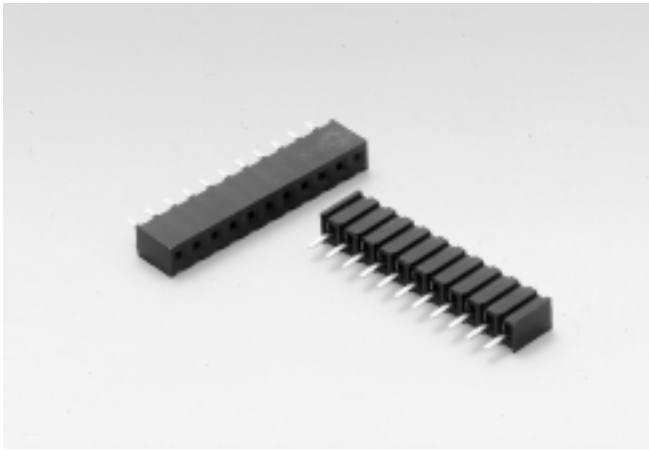


200130FS Series

Mates With SUYIN 200110, 200111 Series

Specifications:

- **2-40 Circuits**
- **Insulator Material** : Black High Temp. Plastic
- **Max Processing Temp.** : -40°C to +105°C
- **Terminal Material** : Pho. bronze
- **Plating** : Contact-Selective Gold Plated or Full Gold Plated
- **Max. Current Rating** : 1.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

2.0
mm

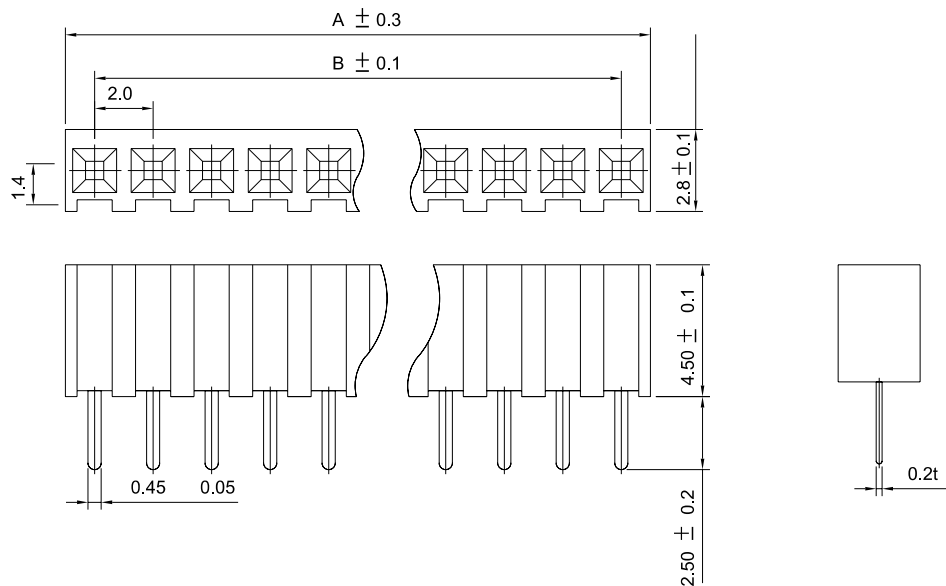

Order Information

200130FS□□□□00ZU
1 2 3 4 5

1. 'S' : Straight DIP Type
 2. No. of Pins
 3. Plating
 4. Color 'Z' : Black
 5. Package
- 'U' : Tube Package Without CAP
- Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200130FS002□□00ZU	4.0	2.0	200130FS012□□00ZU	24.0	22.0
200130FS003□□00ZU	6.0	4.0	200130FS013□□00ZU	26.0	24.0
200130FS004□□00ZU	8.0	6.0	200130FS014□□00ZU	28.0	26.0
200130FS005□□00ZU	10.0	8.0	200130FS015□□00ZU	30.0	28.0
200130FS006□□00ZU	12.0	10.0	200130FS016□□00ZU	32.0	30.0
200130FS007□□00ZU	14.0	12.0	200130FS020□□00ZU	40.0	38.0
200130FS008□□00ZU	16.0	14.0	200130FS024□□00ZU	48.0	46.0
200130FS009□□00ZU	18.0	16.0	200130FS030□□00ZU	60.0	58.0
200130FS010□□00ZU	20.0	18.0	200130FS034□□00ZU	68.0	66.0
200130FS011□□00ZU	22.0	20.0	200130FS040□□00ZU	80.0	78.0

Recommended P.C.B Layout

