

查询"NJM3404AD"供应商 SINGLE SUPPLY DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION


The NJM3404A is high performance single supply dual operational amplifier. The NJM3404A is a half type of the NJM3403A, quad operational amplifier.

The NJM3404A is improved version of the NJM2904 on slew rate & cross-over distortion.

■ FEATURES

- Single Supply
- Operating Voltage (+4V ~ +36V)
- Low Operating Current (2.0mA typ.)
- Slew Rate (1.2V/μs typ.)
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

■ PACKAGE OUTLINE




NJM3404AD



NJM3404AM




NJM3404AV




NJM3404AL

*S-Type (SIP-9) available

■ PIN CONFIGURATION



NJM3404AD
NJM3404AM
NJM3404AV




NJM3404AL

PIN FUNCTION

1. A OUTPUT
2. A-INPUT
3. A+INPUT
4. V-
5. B+INPUT
6. B-INPUT
7. B OUTPUT
8. V+

■ EQUIVALENT CIRCUIT (1/2 Shown)

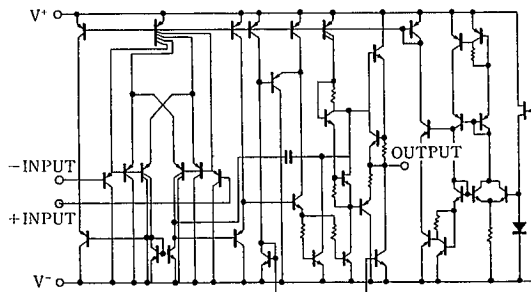

4

查询"NJM3404AD"供应商

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*(V+/V-)	36V(or ±18)	V
Differential Input Voltage	V _{ID}	36	V
Input Voltage	V _{IC}	-0.3 ~ 36	V
Power Dissipation	P _D	(DIP8) 500	mW
		(DMP8) 300	mW
		(SSOP8) 250	mW
		(SIP8) 800	mW
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C







■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, V+/V- = ±15V)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S = 0Ω	—	2	5	mV
Input Offset Current	I _{IO}		—	5	50	nA
Input Bias Current	I _B		—	70	200	nA
Large Signal Voltage Gain	A _V	R _L > 2KΩ	88	100	—	dB
Maximum Output Voltage Swing	V _{OM}	R _L = 2kΩ	±13	±14	—	V
Input Common Mode Voltage Range	V _{ICM}		-15 ~ +13	—	—	V
Common Mode Rejection Ratio	CMR	DC	70	90	—	dB
Supply Voltage Rejection Ratio	SVR		80	94	—	dB
Operating Current	I _{CC}	R _L = ∞	—	2.0	3.5	mA
Output Source Current	I _{SOURCE}	V _{IN+} = 1V, V _{IN-} = 0V	20	30	—	mA
Output Sink Current	I _{SINK}	V _{IN+} = 0V, V _{IN-} = 1V	10	20	—	mA
Slew Rate	SR		—	1.2	—	V/μS
Unity Gain Bandwidth	f _T	—	—	1.2	—	MHz

[查询"NJM3404AD"供应商](#)

■ TYPICAL CHARACTERISTICS

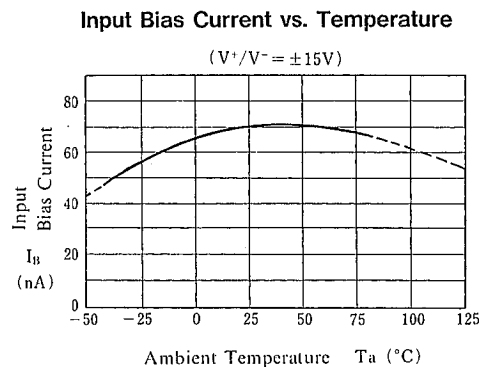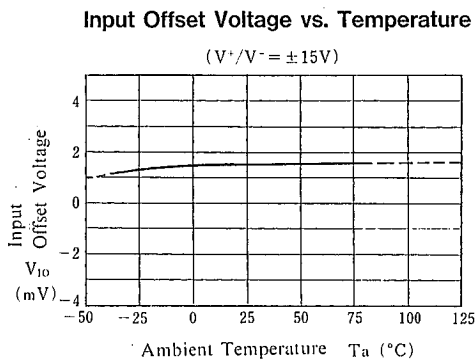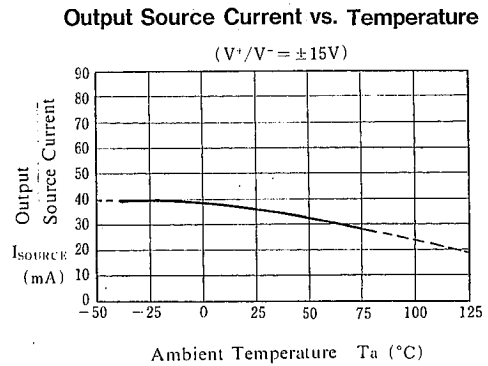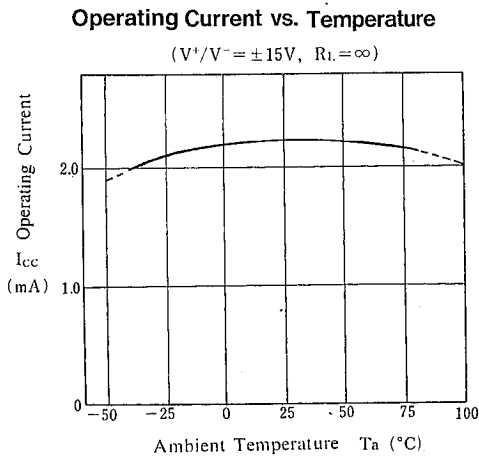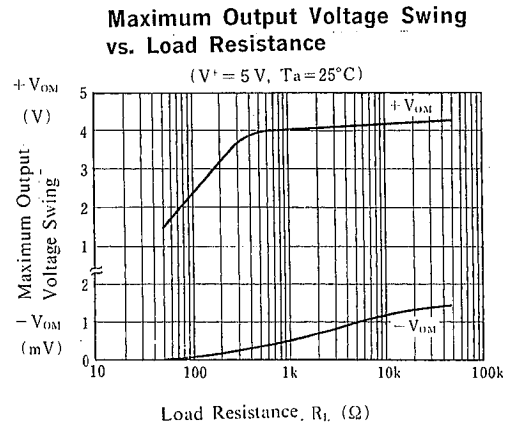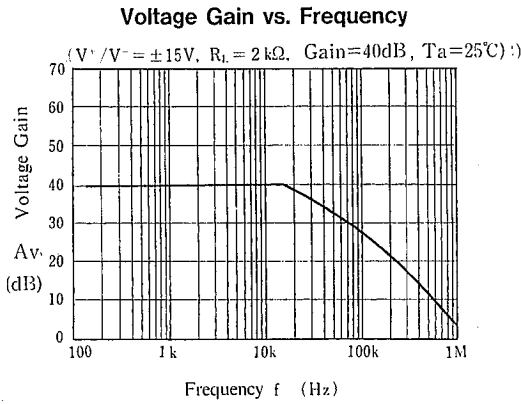


[查询"NJM3404AD"供应商](#)


■ TYPICAL CHARACTERISTICS

**Output Source Current
Output Sink Current
vs. Output Voltage Swing**

($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

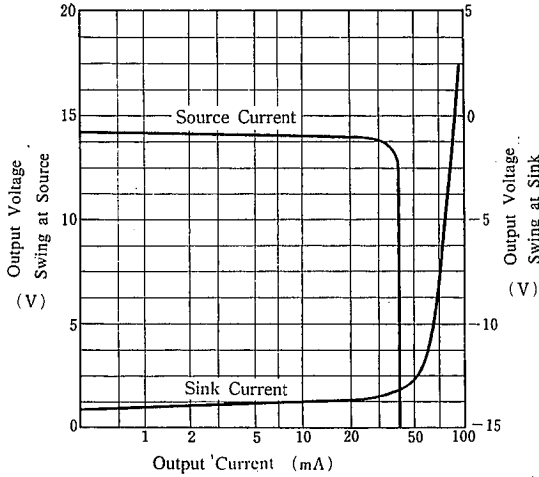


**Operating Current
vs. Operating Voltage**

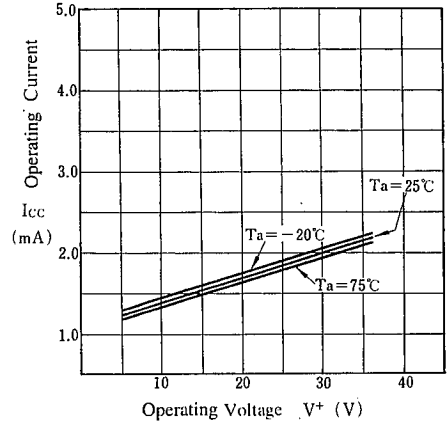


Output Voltage Swing vs. Operating Voltage

($R_L = 2k\Omega$, $T_a = 25^\circ C$)

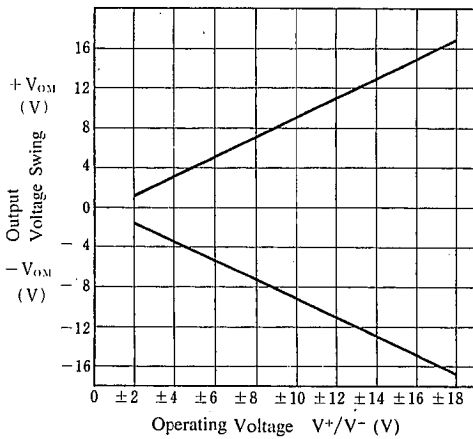


Pulse Response

($V^+/V^- = \pm 15V$, $R_L > 2k\Omega$, $A_v = 1$, $T_a = 25^\circ C$)

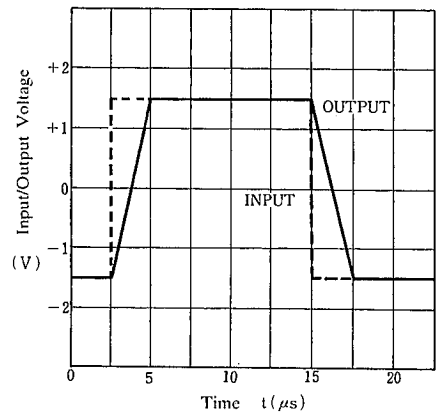


Maximum Output Voltage vs. Frequency

($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $T_a = 25^\circ C$)

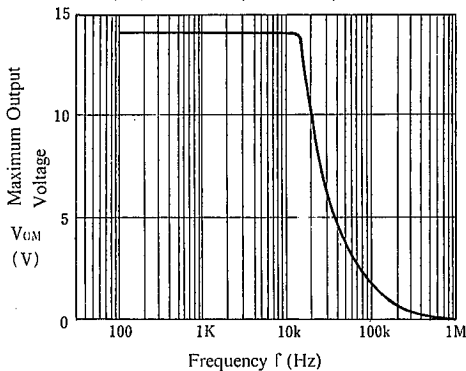

Maximum Output Voltage vs. Temperature


($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$)

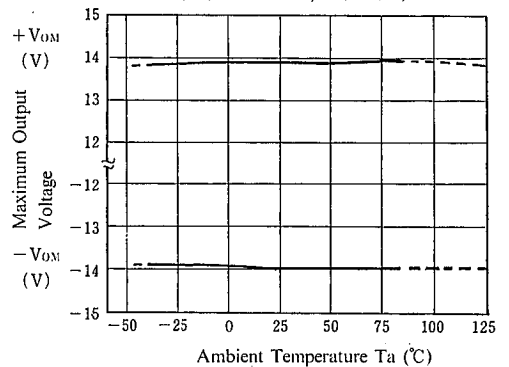


[查询"NJM3404AD"供应商](#)

■ TYPICAL APPLICATIONS

Square Wave Oscillator

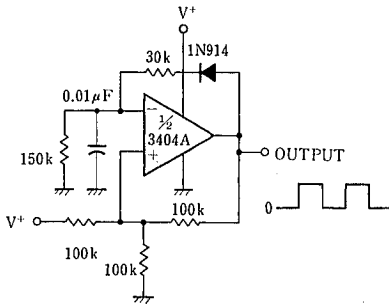

Bandpass Filter

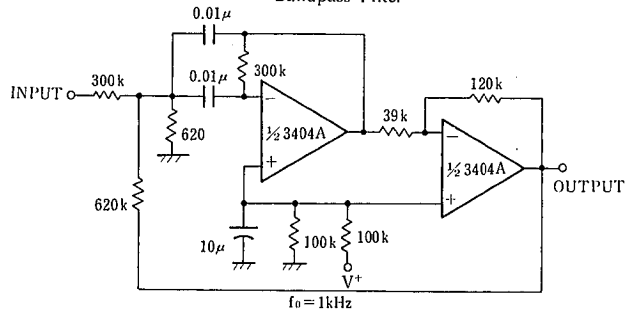

NJM3404A

[查询"NJM3404AD"供应商](#)

MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.