

UL 1459 Recognized



File No. E150444
查询 T-10148 供应商

Turns Ratio ($\pm 5\%$)

1:2CT & 1:2CT

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5		mH
Leakage Inductance		0.5	μ H
Capacitance ($C_{w/w}$)		35	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		1.4	ohms
ET Product	10		V μ S

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 33 pieces per tube


Surface mount version of this part available. Part# T-11048

Primary Pins 14-12 & 5-7

PHYSICAL DIMENSIONS All dimensions in inches (mm):

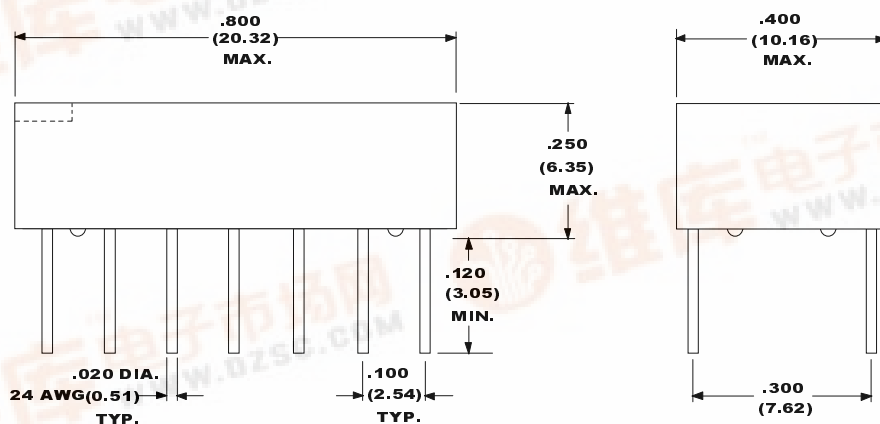

SCHEMATIC DIAGRAM:

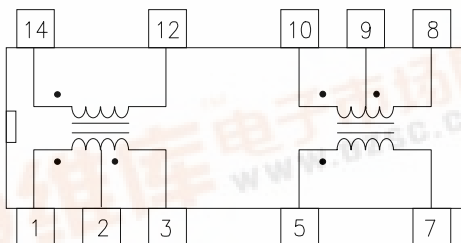

Unused pins not provided

RHOMBUS P/N: **T-10148**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1



Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649

Phone: (714) 898-0960

FAX: (714) 896-0971

www.rhombus-ind.com

