



[查询"BSS84T/R13"供应商](#)

P-CHANNEL ENHANCEMENT MODE MOSFET

This is a P-channel, enhancement-mode MOSFET, housed in the industry-standard, SOT-23 package. This device is ideal for portable applications where board space is at a premium.


FEATURES

- Low On-Resistance
- Low Gate Threshold Voltage
- Fast Switching
- Available in lead-free plating (100% matte tin finish)

APPLICATIONS

- Switching Power Supplies
- Hand-Held Computers, PDAs

MARKING CODE: 84L

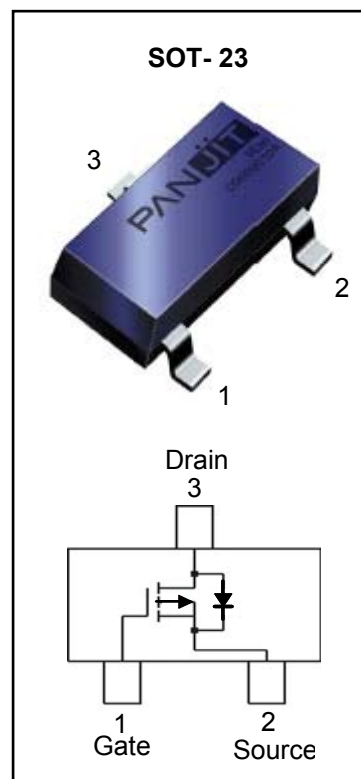

MAXIMUM RATINGS

$T_J = 25^{\circ}\text{C}$ Unless otherwise noted

Rating	Symbol	Value	Units
Drain-Source Voltage	V_{DSS}	- 50	V
Drain-Gate Voltage (Note 1)	V_{DGR}	- 50	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current	I_D	130	mA
Total Power Dissipation (Note 2)	P_D	200	mW
Operating Junction Temperature Range	T_J	-55 to +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$

Note 1. $R_{GS} < 20\text{K ohms}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Units
Thermal Resistance, Junction to Ambient (Note 2)	R_{thja}	625	$^{\circ}\text{C/W}$

Note 2. FR-5 board 1.0 x 0.75 x 0.062 inch with minimum recommended pad layout

[查询"BSS84T/R13"供应商](#)**ELECTRICAL CHARACTERISTICS** $T_J = 25^\circ\text{C}$ Unless otherwise noted**OFF CHARACTERISTICS (Note 3)**

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D = -250\mu\text{A}$, $V_{GS} = 0\text{V}$	-50	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -50\text{V}$, $V_{GS} = 0\text{V}$, $T_J = 25^\circ\text{C}$	-	-	-15	μA
		$V_{DS} = -50\text{V}$, $V_{GS} = 0\text{V}$, $T_J = 125^\circ\text{C}$	-	-	-60	
		$V_{DS} = -25\text{V}$, $V_{GS} = 0\text{V}$, $T_J = 25^\circ\text{C}$	-	-	-0.1	
Gate-Body Leakage	I_{GSS}	$V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$	-	-	± 10	nA

ON CHARACTERISTICS (Note 3)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = -1\text{mA}$	-0.8	-1.44	-2.0	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS} = -5\text{V}$, $I_D = -0.1\text{A}$	-	3.8	10	Ohms
Forward Transconductance	g_{FS}	$V_{DS} = -25\text{V}$, $I_D = -0.1\text{A}$	0.05	-	-	S

DYNAMIC CHARACTERISTICS

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input Capacitance	C_{iss}	$V_{DS} = -25\text{V}$, $V_{GS} = 0\text{V}$, $f = 1.0\text{MHz}$	-	-	45	pF
Output Capacitance	C_{oss}		-	-	25	pF
Reverse Transfer Capacitance	C_{rss}		-	-	12	pF

SWITCHING CHARACTERISTICS

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Turn-On Delay Time	$t_{D(ON)}$	$V_{DD} = -30\text{V}$, $I_D = -0.27\text{A}$, $R_{GEN} = 50\text{ohm}$, $V_{GS} = -10\text{V}$	-	7.5	-	ns
Turn-Off Delay Time	$t_{D(OFF)}$		-	25	-	ns

Note 3. Short duration test pulse used to minimize self-heating



ELECTRICAL CHARACTERISTIC CURVES

$T_J = 25^\circ\text{C}$ Unless otherwise noted

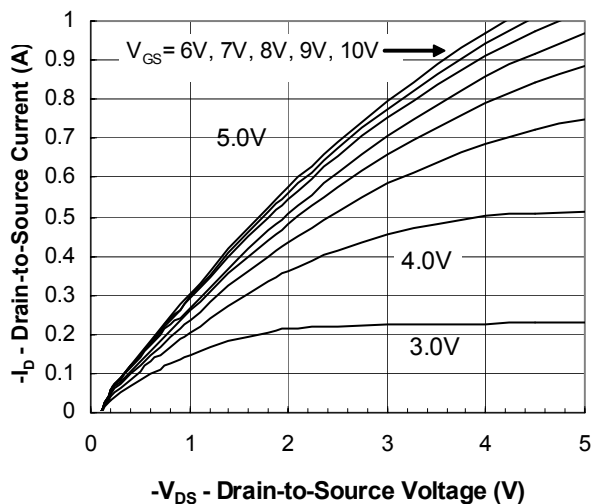


Fig. 1. Output Characteristics

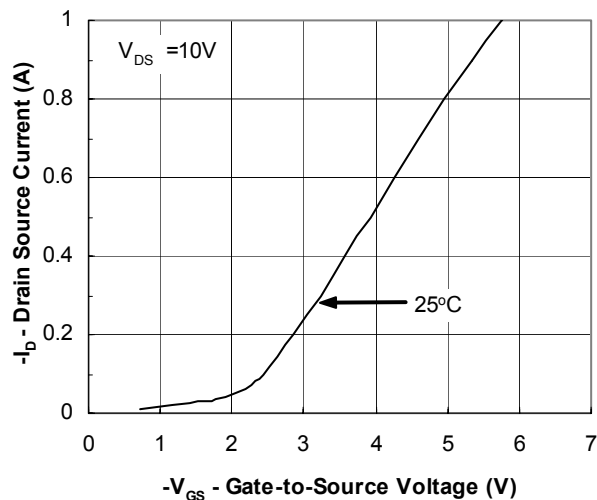


Fig. 2. Transfer Characteristics

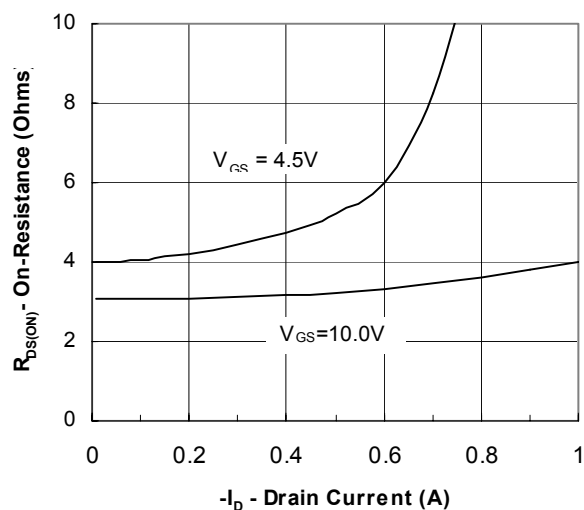


Fig. 3. On-Resistance vs. Drain Current

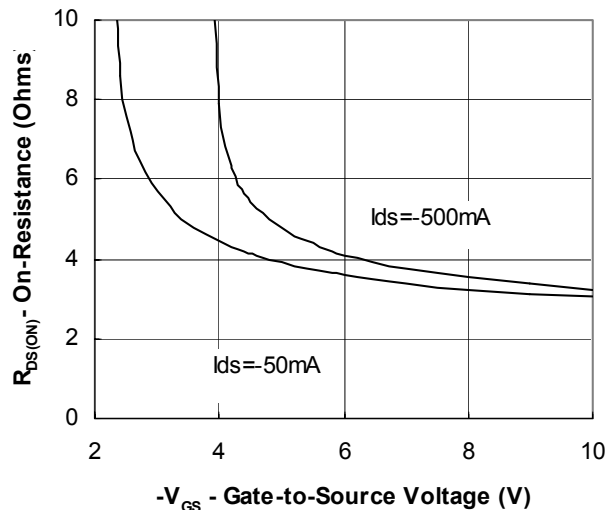


Fig. 4. On-Resistance vs. G-S Voltage

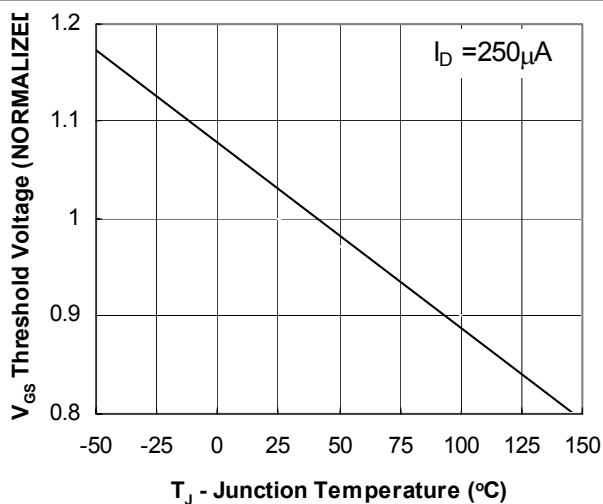


Fig. 5. Threshold Voltage vs. Temperature



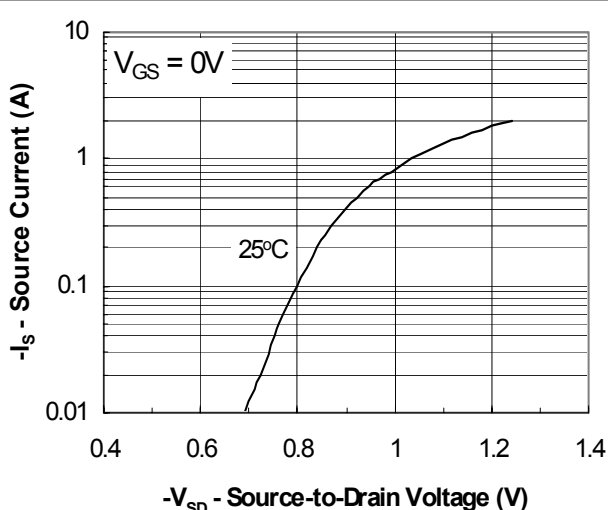


Fig. 6. Source-Drain Diode Forward Voltage

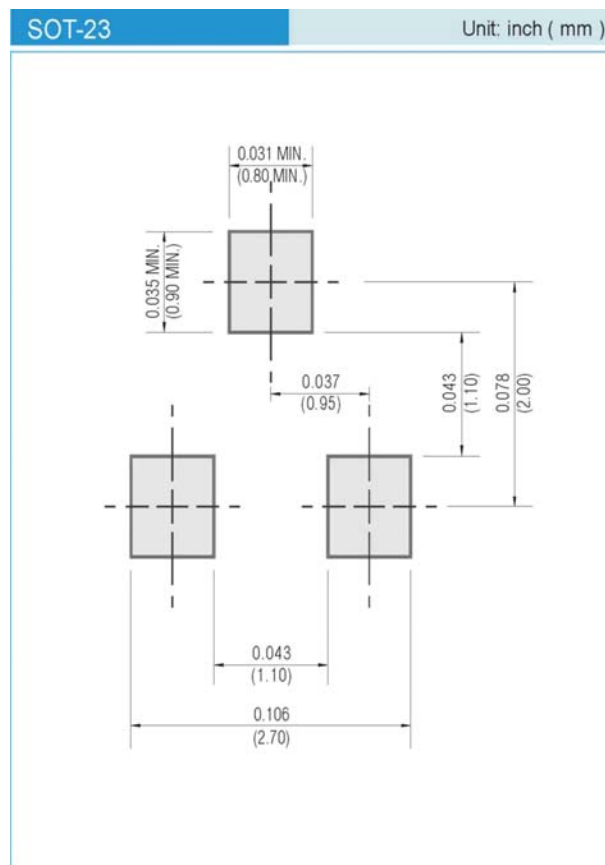

[查询"BSS84T/R13"供应商](#)

PACKAGE LAYOUT AND SUGGESTED PAD DIMENSIONS

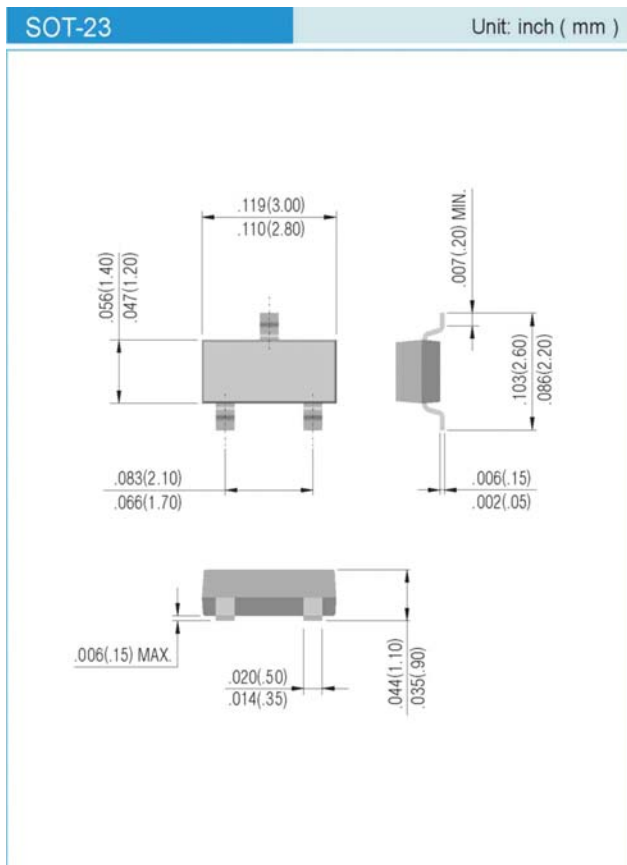

ORDERING INFORMATION

BSS84 T/R7 - 7 inch reel, 3K units per reel

BSS84 T/R13 - 13 inch reel, 10K units per reel

Copyright PanJit International, Inc 2005

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.