
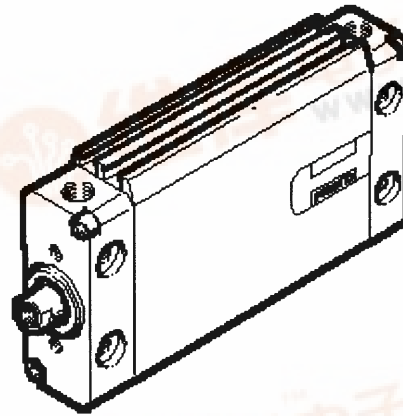


[查询"164032"供应商](#)

Detail view

Double acting flat
piston cylinder,
non-rotating piston
rod
164032
DZF-25-100-P-A



Criterion	Feature
Mode of operation	Double acting
Shape piston	Oval
Shape of piston rod	Round
Sensing type	Magnetic
Type of cushioning	Internal cushioning ring (non-adjustable)
Protection against torsion	Piston shape
Piston, nominal size	25 ---
Stroke	100 mm
Piston rod diameter	10 mm
End of piston rod	Female thread
KK Piston rod thread	M 5
Operating pressure min.	1 bar
Operating pressure max.	10 bar
Minimum ambient temperature	-20 °C
Maximum ambient temperature	80 °C

[查询"164032"供应商](#)

Air connection type bearing cap (EE)	Female thread
EE Connecting thread for bearing cap	M 5
Material of cap	Kneaded aluminium alloy
Material of seals	FPM, TPE-U(PU)
Material of piston rod	Stainless high-alloy steel
Material of barrel/housing	Kneaded aluminium alloy
Total weight at 0 mm stroke	0,168 kg
Additional weight per 10 mm stroke	0,018 kg
Weight of moving load at 0 mm stroke	0,04 kg
Weight of moving load per 10 mm stroke	0,006 kg
Air connection type cover cap	Female thread
EE Connecting thread for end cap	M 5
Effective force (theor.) at 6 bar, adv.	295 N
Effect. force (theor.) at 6 bar, return	247 N
Torque max.	0,5 Nm
Air consumpt.at 6 bar per advance stroke	0,344 l
Air consumpt. at 6 bar per return stroke	0,289 l
Medium	Dried air, lubricated or unlubricated

© 2001 Festo AG & Co.