

DESCRIPTION


The LLV0603-FH Series is a multilayer ceramic chip inductor with high-Q characteristics in an EIA standard 0201 footprint (0.6mm x 0.3mm) and a low profile of only 0.33mm maximum. Manufactured with a proprietary ceramic material and process, these lead-free chip inductors are ideal for use in RF modules and embedded subassemblies where space is limited and printed stripline inductors are impractical.

FEATURES


- Inductance range: 1.0-47nH
- Miniature size: 0201 footprint (0.6mm x 0.3mm)
- Q: 21 ~ 32 typical (at 1800MHz)
- Temperature coefficient of inductance: +250ppm/°C
- Temperature range: -55°C to +125°C
- S-parameter data available upon request
- Packaged on tape and reel in 15,000 piece quantity
- Reflow solderable
- Lead-free terminations

DIMENSIONS

Length L (mm)	Width W (mm)	Thickness T (mm)	Electrode width A (mm)
0.6±0.03	0.3±0.03	0.3±0.03	0.1-0.2



PART NUMBERING

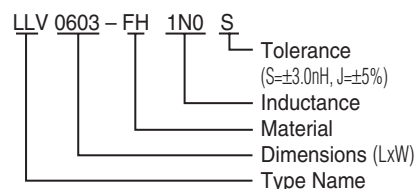

ELECTRICAL SPECIFICATIONS

TYPE LLV0603-FH


TOKO Part Number	Inductance & Tolerance		Q min.	Q (typ.)							SRF (MHz) min.	RDC (Ω) max.	IDC (mA) max.
	at 100MHz												
	Lo (nH)	L Tol.*		100 MHz	100 MHz	300 MHz	500 MHz	800 MHz	1 GHz	1.8 GHz			
LLV0603-FH1N0S	1.0	S	4	6	11	14	19	22	31	38	13000	0.14	300
LLV0603-FH1N2S	1.2	S	4	6	11	14	19	22	31	38	13000	0.14	300
LLV0603-FH1N5S	1.5	S	4	6	11	14	19	21	30	37	11000	0.16	300
LLV0603-FH1N8S	1.8	S	4.5	6	11	15	19	22	31	37	8500	0.18	300
LLV0603-FH2N2S	2.2	S	5	6	11	15	19	22	31	36	8500	0.20	250
LLV0603-FH2N7S	2.7	S	5	7	12	15	20	23	32	38	6000	0.23	250
LLV0603-FH3N3S	3.3	S	5	7	12	16	20	23	32	38	5000	0.25	250
LLV0603-FH3N9S	3.9	S	5	7	12	16	20	23	32	38	5000	0.28	250
LLV0603-FH4N7S	4.7	S	5.5	7	12	16	20	23	32	36	4000	0.30	250
LLV0603-FH5N6S	5.6	S	6	7	12	16	20	22	31	34	4000	0.35	220
LLV0603-FH6N8J	6.8	J	6	7	12	16	20	22	30	33	3500	0.40	220
LLV0603-FH8N2J	8.2	J	6	8	12	16	20	22	29	30	3000	0.50	220
LLV0603-FH10NJ	10	J	6	8	12	16	20	23	28	27	2500	0.60	220
LLV0603-FH12NJ	12	J	6	8	13	17	21	23	27	25	2500	0.65	180
LLV0603-FH15NJ	15	J	6	8	13	16	20	22	24	18	2000	0.75	180
LLV0603-FH18NJ	18	J	6.5	8	13	16	19	21	21	13	2000	0.85	150
LLV0603-FH22NJ	22	J	7	8	14	17	20	22	22	—	2000	1.70	100
LLV0603-FH27NJ	27	J	7	8	14	17	20	21	—	—	1700	1.80	50
LLV0603-FH33NJ	33	J	7	8	14	17	19	20	—	—	1400	2.00	50
LLV0603-FH39NJ	39	J	6	7	12	14	15	14	—	—	1300	2.30	50
LLV0603-FH47NJ	47	J	6	7	12	14	13	11	—	—	1100	2.70	50

* Part number tolerance: S=±0.3nH, J = ±5%


Testing Conditions: (1) L,Q: Agilent 4291A/B (Test fixture Agilent 16196C) (2) SRF: Agilent 8719D, 8720D (3) RDC: Agilent 4338A/B

TYPICAL CHARACTERISTICS

Q vs Frequency

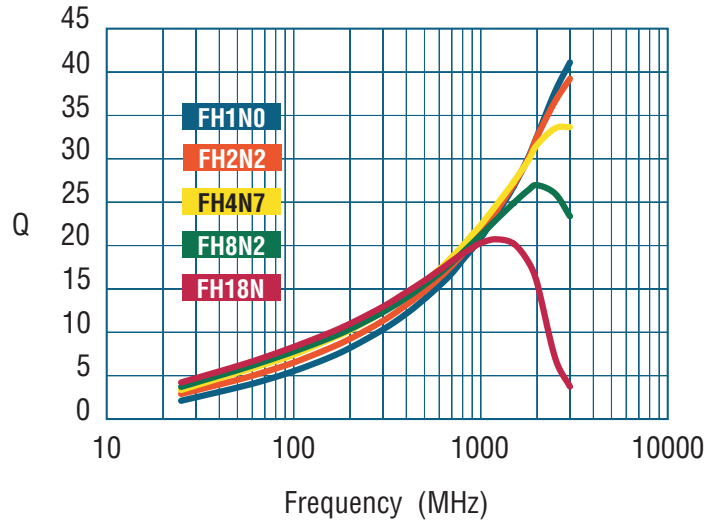

Inductance vs Frequency

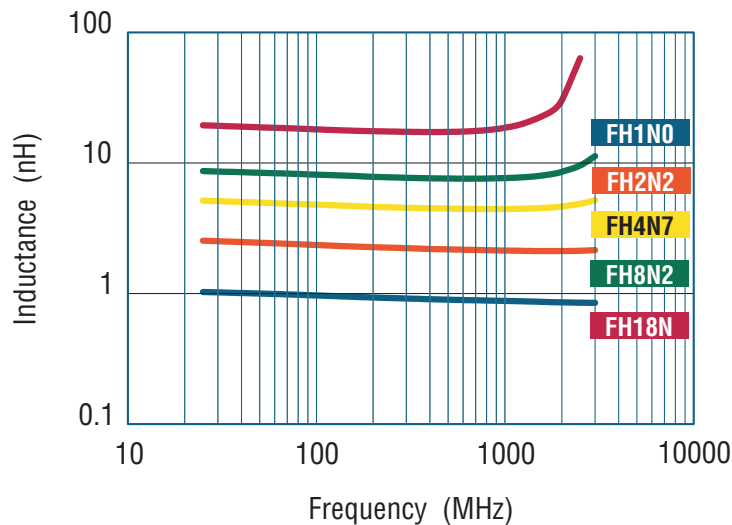

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.