

● 搜索"LM108/BPAJC"供应商

MOTOROLA SEMICONDUCTOR

TECHNICAL DATA

LM108, LM108A LM208, LM208A LM308, LM308A

2


PRECISION OPERATIONAL AMPLIFIERS

The LM108/LM208/LM308 Series operational amplifiers provide high input impedance, low input offsets and temperature drifts, and low noise. These characteristics are made possible by use of a special Super Beta processing technology. This series of amplifiers is particularly useful for applications where high-accuracy and low-drift performance are essential. In addition high-speed performance may be improved by employing feed-forward compensation techniques to maximize slew rate without compromising other performance criteria.

The LM108A/LM208A/LM308A Series offers extremely low input offset voltage and drift specifications allowing usage in even the most critical applications without external offset nulling.

- Operation From a Wide Range of Power Supply Voltages
- Low Input Bias and Offset Currents
- Low Input Offset Voltage and Guaranteed Offset Voltage Drift Performance
- High Input Impedance

FREQUENCY COMPENSATION



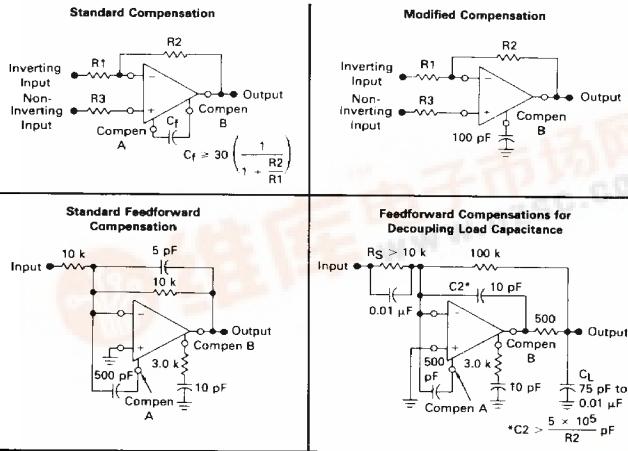


ORDERING INFORMATION

Device	Temperature Range	Package
LM108AH, H LM108AJ, J, AJ-8, J-8	-55 to +125°C	Metal Can Ceramic DIP
LM208AH, H LM208AJ, J, AJ-8, J-8 LM208AN, N LM208AD, D	25 to -85°C	Metal Can Ceramic DIP Plastic DIP SO-8
LM308H, H LM308AJ, J, AJ-8, J-8 LM308AN, N LM308AD, D	0 to +70°C	Metal Can Ceramic DIP Plastic DIP SO-8

SUPER GAIN OPERATIONAL AMPLIFIERS

SILICON MONOLITHIC
INTEGRATED CIRCUIT

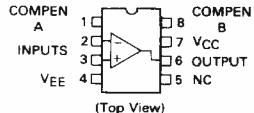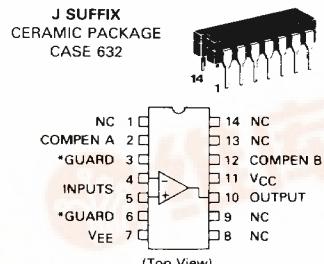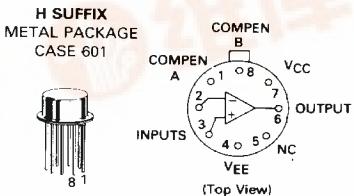

*Unused pin (no internal connection) to allow for input anti-leakage guard ring on printed circuit board layout.

LM108, LM108A, LM208, LM208A, LM308, LM308A

MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$ unless otherwise noted.)

Rating	Symbol	Value			Unit
		LM108, LM108A	LM208, LM208A	LM308, LM308A	
Power Supply Voltage	V_{CC}, V_{EE}	±20	±20	±18	Vdc
Input Voltage (See Note 1)	V_I	—	±15	—	Volts
Input Differential Current (See Note 2)	I_{ID}	—	±10	—	mA
Output Short-Circuit Duration	t_S	—	Indefinite	—	
Operating Ambient Temperature Range	T_A	−55 to +125	−25 to +85	0 to +70	°C
Storage Temperature Range	T_{STG}	—	−65 to +150	—	°C
Junction Temperature Metal, Ceramic Package Plastic Package	T_J	—	+175	—	°C
		—	+150	—	

Note 1. For supply voltages less than ±15 V, the maximum input voltage is equal to the supply voltage.

Note 2. The inputs are shunted with back-to-back diodes for over-voltage protection. Therefore, excessive current will flow if a differential input voltage in excess of 1.0 V is applied between the inputs unless some limiting resistance is used.

ELECTRICAL CHARACTERISTICS (Unless otherwise noted these specifications apply for supply voltages of $+5.0 \text{ V} \leq V_{CC} \leq +20 \text{ V}$ and $-5.0 \text{ V} \geq V_{EE} \geq -20 \text{ V}$, $T_A = +25^\circ\text{C}$.)

Characteristic	Symbol	LM108A LM208A			LM108 LM208			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V_{IO}	—	0.3	0.5	—	0.7	2.0	mV
Input Offset Current	I_{IO}	—	0.05	0.2	—	0.005	0.2	nA
Input Bias Current	I_{IB}	—	0.8	2.0	—	0.8	2.0	nA
Input Resistance	r_i	30	70	—	30	70	—	Megohms
Power Supply Currents $V_{CC} = +20 \text{ V}$, $V_{EE} = -20 \text{ V}$	$I_{CC,IEE}$	—	±0.3	±0.6	—	±0.3	±0.6	mA
Large Signal Voltage Gain $V_{CC} = V_{EE} = +15 \text{ V}$, $V_O = \pm 10 \text{ V}$, $R_L \geq 10 \text{ k}\Omega$	A_{VOL}	80	300	—	50	300	—	V/mV

The following specifications apply over the operating temperature range.

Input Offset Voltage	V_{IO}	—	—	1.0	—	—	3.0	mV
Input Offset Current	I_{IO}	—	—	0.4	—	—	0.4	nA
Average Temperature Coefficient of Input Offset Voltage $T_A(\text{min}) \leq T_A \leq T_A(\text{max})$	$\Delta V_{IO}/\Delta T$	—	1.0	5.0	—	3.0	15	$\mu\text{V}/^\circ\text{C}$
Average Temperature Coefficient of Input Offset Current	$\Delta I_{IO}/\Delta T$	—	0.5	2.5	—	0.5	2.5	$\text{pA}/^\circ\text{C}$
Input Bias Current	I_{IB}	—	—	3.0	—	—	3.0	nA
Large Signal Voltage Gain $V_{CC} = V_{EE} = +15 \text{ V}$, $V_O = \pm 10 \text{ V}$, $R_L = 10 \text{ k}\Omega$	A_{VOL}	40	—	—	25	—	—	V/mV
Input Voltage Range $V_{CC} = V_{EE} = +15 \text{ V}$	V_{IR}	±13.5	—	—	±13.5	—	—	V
Common-Mode Rejection Ratio	CMRR	96	110	—	85	100	—	dB
Power Supply Voltage Rejection Ratio	PSRR	96	100	—	80	96	—	dB
Output Voltage Range $V_{CC} = V_{EE} = +15 \text{ V}$, $R_L = 10 \text{ k}\Omega$	V_{OR}	±13	±14	—	±13	±14	—	V
Supply Current ($T_A = T_A(\text{max})$)	$I_{CC,IEE}$	—	±0.15	±0.4	—	±0.15	±0.4	mA

LM108, LM108A, LM208, LM208A, LM308, LM308A

ELECTRICAL CHARACTERISTICS (Unless otherwise noted these specifications apply for supply voltages of $+5.0 \text{ V} \leq V_{CC} \leq +15 \text{ V}$ and $-5.0 \text{ V} \geq V_{EE} \geq -15 \text{ V}$, $T_A = +25^\circ\text{C}$.)


查询“108/BPAJC”供应商

Characteristic	Symbol	LM308A			LM308			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V_{IO}	—	0.3	0.5	—	2.0	7.5	mV
Input Offset Current	I_{IO}	—	0.2	1.0	—	0.2	1.0	nA
Input Bias Current	I_{IB}	—	1.5	7.0	—	1.5	7.0	nA
Input Resistance	r_i	10	40	—	10	40	—	Megohms
Power Supply Currents $V_{CC} = +15 \text{ V}$, $V_{EE} = -15 \text{ V}$	I_{CC}/I_{EE}	—	± 0.3	± 0.8	—	± 0.3	± 0.8	mA
Large Signal Voltage Gain $V_{CC} = +15 \text{ V}$, $V_{EE} = -15 \text{ V}$, $V_O = \pm 10 \text{ V}$, $R_L \geq 10 \text{ k}\Omega$	AVOL	80	300	—	25	300	—	V/mV

The following specifications apply over the operating temperature range.

Input Offset Voltage	V_{IO}	—	—	0.73	—	—	10	mV
Input Offset Current	I_{IO}	—	—	1.5	—	—	1.5	nA
Average Temperature Coefficient of Input Offset Voltage $T_A(\text{min}) \leq T_A \leq T_A(\text{max})$	$\Delta V_{IO}/\Delta T$	—	1.0	5.0	—	6.0	30	$\mu\text{V}/^\circ\text{C}$
Average Temperature Coefficient of Input Offset Current	$\Delta I_{IO}/\Delta T$	—	2.0	10	—	2.0	10	pA/ $^\circ\text{C}$
Input Bias Current	I_{IB}	—	—	10	—	—	10	nA
Large Signal Voltage Gain $V_{CC} = +15 \text{ V}$, $V_{EE} = -15 \text{ V}$, $V_O = \pm 10 \text{ V}$, $R_L \geq 10 \text{ k}\Omega$	AVOL	60	—	—	15	—	—	V/mV
Input Voltage Range $V_{CC} = +15 \text{ V}$, $V_{EE} = -15 \text{ V}$	V_{IR}	± 14	—	—	± 14	—	—	V
Common-Mode Rejection Ratio $R_S \leq 50 \text{ k}\Omega$	CMRR	96	110	—	80	100	—	dB
Supply Voltage Rejection Ratio $R_S \leq 50 \text{ k}\Omega$	PSRR	96	110	—	80	96	—	dB
Output Voltage Range $V_{CC} = +15 \text{ V}$, $V_{EE} = -15 \text{ V}$, $R_L = 10 \text{ k}\Omega$	V_{OR}	± 13	± 14	—	± 13	± 14	—	V

REPRESENTATIVE CIRCUIT SCHEMATIC

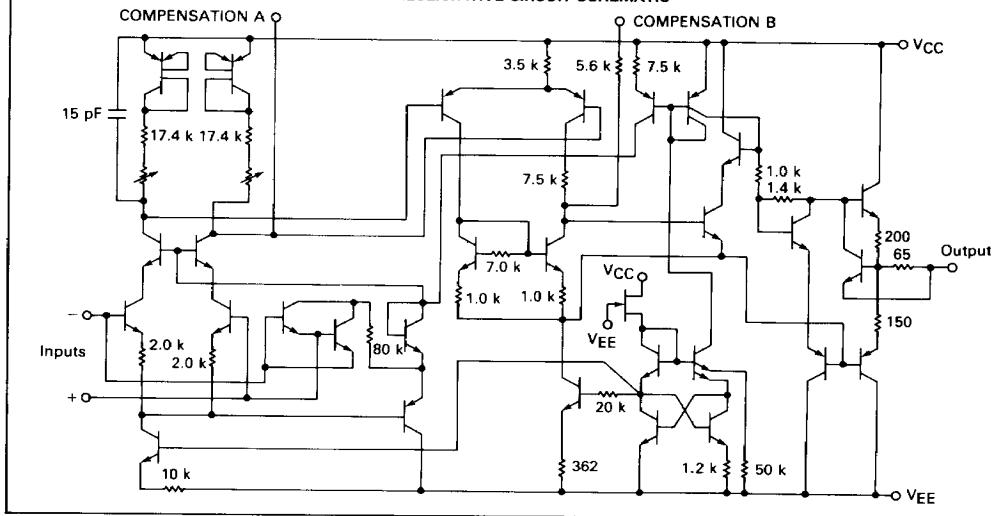







MOTOROLA LINEAR/INTERFACE DEVICES

LM108, LM108A, LM208, LM208A, LM308, LM308A

TYPICAL CHARACTERISTICS

2

[查询"108/BPAJC"供应商](#)

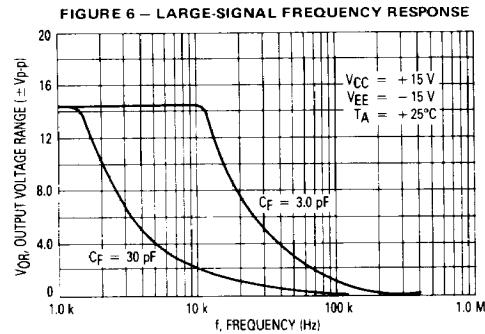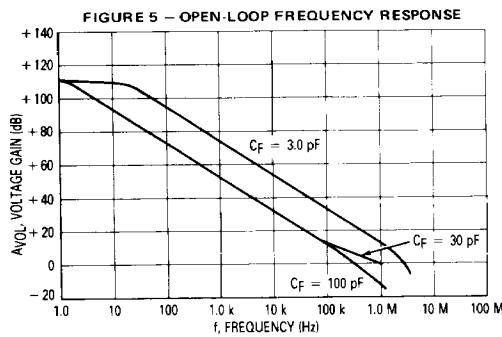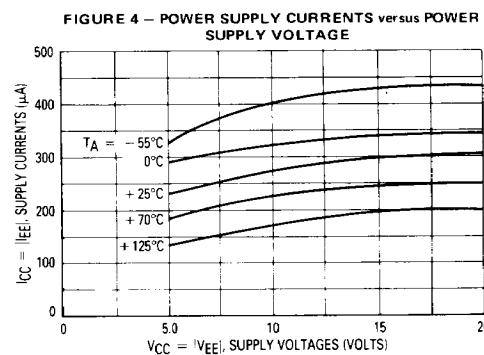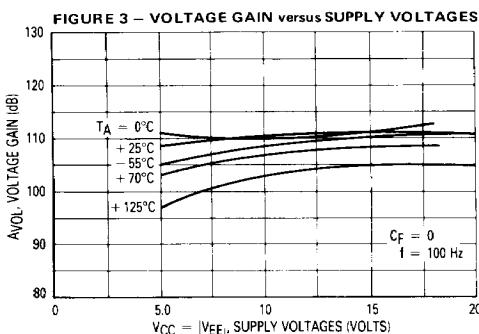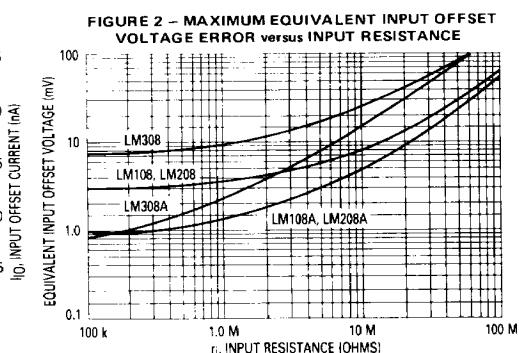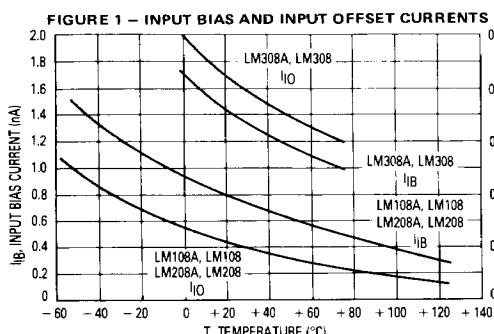

LM140,A, LM340,A

查询"108/BPAJC"供应商

LM140A/340A — 5.0

ELECTRICAL CHARACTERISTICS ($V_{in} = 10$ V, $I_O = 1.0$ A, $T_J = T_{low}$ to T_{high} (Note 1), unless otherwise noted).

3

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage ($T_J = +25^\circ\text{C}$) $I_O = 5.0$ mA to 1.0 A	V_O	4.9	5.0	5.1	Vdc
Line Regulation (Note 2) 7.5 to 20 Vdc, $I_O = 500$ mA 7.3 to 20 Vdc ($T_J = +25^\circ\text{C}$) 8.0 to 12 Vdc 8.0 to 12 Vdc ($T_J = +25^\circ\text{C}$)	Regline	—	—	10	mV
		—	3.0	10	
		—	—	12	
		—	—	4.0	
Load Regulation (Note 2) 5.0 mA $\leq I_O \leq 1.0$ A 5.0 mA $\leq I_O \leq 1.5$ A ($T_J = +25^\circ\text{C}$) 250 mA $\leq I_O \leq 750$ mA ($T_J = +25^\circ\text{C}$)	Regload	—	—	25	mV
		—	—	25	
		—	—	15	
Output Voltage $7.5 \leq V_{in} \leq 20$ Vdc, 5.0 mA $\leq I_O \leq 1.0$ A, $P_D \leq 15$ W	V_O	4.8	—	5.2	Vdc
Quiescent Current ($T_J = +25^\circ\text{C}$)	I_B	—	—	6.5	mA
Quiescent Current Change 5.0 mA $\leq I_O \leq 1.0$ A, $V_{in} = 10$ V 8.0 $\leq V_{in} \leq 25$ Vdc, $I_O = 500$ mA 7.5 $\leq V_{in} \leq 20$ Vdc, $I_O = 1.0$ A ($T_J = +25^\circ\text{C}$)	ΔI_B	—	—	0.5	mA
		—	—	0.8	
		—	—	0.8	
Ripple Rejection 8.0 $\leq V_{in} \leq 18$ Vdc, $f = 120$ Hz $I_O = 500$ mA $I_O = 1.0$ A ($T_J = +25^\circ\text{C}$)	RR	—	—	—	dB
		68	—	—	
		68	80	—	
Dropout Voltage	$V_{in} - V_O$	—	1.7	—	Vdc
Output Resistance ($f = 1.0$ kHz)	r_O	—	2.0	—	$\text{m}\Omega$
Short-Circuit Current Limit ($T_J = +25^\circ\text{C}$)	I_{sc}	—	2.0	—	mA
Output Noise Voltage ($T_A = +25^\circ\text{C}$) 10 Hz $\leq f \leq 100$ kHz	V_n	—	40	—	μV
Average Temperature Coefficient of Output Voltage $I_O = 5.0$ mA	TCV_O	—	± 0.6	—	mV°C
Peak Output Current ($T_J = +25^\circ\text{C}$)	I_O	—	2.4	—	A
Input Voltage to Maintain Line Regulation ($T_J = +25^\circ\text{C}$)		7.3	—	—	Vdc

NOTES:

- $T_{low} = -55^\circ\text{C}$ for LM140A $T_{high} = +150^\circ\text{C}$ for LM140A
= 0°C for LM340A = $+125^\circ\text{C}$ for LM340A
- Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.