

INTERNATIONAL RECTIFIER


[查询"1N3086"供应商](#)

1N3085, 1N3111, 1N5162 SERIES

150 Amp Avg Silicon Rectifier Diodes

Major Ratings and Characteristics



	1N3111	1N3085	1N5162	Units
$I_F(AV)$		150*		A
@ Max. T_C		150*		°C
I_{FSM} @ 50 Hz		2,850		A
@ 60 Hz		3,000*		
I^2t @ 50 Hz		41,000		A ² s
@ 60 Hz		37,500		
I^2V/t		580,000		A ² V/°C
V_{RRM} Range	50	100 – 1000	1200	V

*JEDEC registered value

Description and Features

- Alloy junction for soft recovery characteristics
- Rugged device for duty cycle applications
- Reverse voltage ratings up to 1200 volts
- Applications include power rectification in extreme environmental conditions

CASE STYLE AND DIMENSIONS

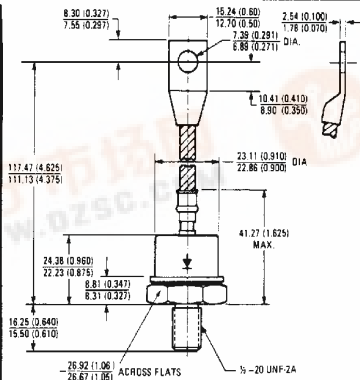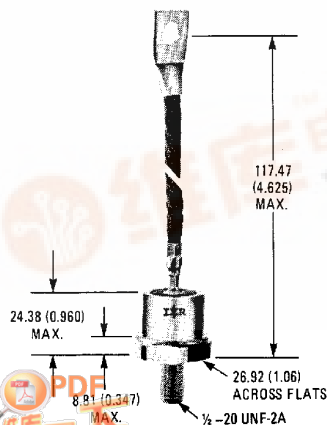

Conforms to JEDEC Outline DO-205AC (DO-36)
All dimensions in Millimeters and (Inches)

VOLTAGE RATINGS

Part Number	查询 "1N3085" 快应商 V_{RRM} Max. Reverse Peak Repetitive Voltage (V)		V_R Max. Direct Reverse Voltage (V)	$I_R(AV)$ Max. Average Reverse Current at Max. Rated $I_F(AV)$ and V_{RRM}, $T_C = 150^\circ C$ 1 Phase Operation (mA)
	$T_C = -65^\circ C$ to $200^\circ C$		$T_C = -65^\circ C$ to $200^\circ C$	
1N3111	50*		40*	25*
1N3085	100*		80*	25*
1N3086	200*		160*	17*
1N3087	300*		240*	17*
1N3088	400*		320*	17*
1N3089	500*		400*	17*
1N3090	600*		480*	17*
1N3091	800*		640*	16*
1N3092	1000*		800*	12*
1N5162	1200*		960*	10*

ELECTRICAL SPECIFICATIONS

		1N3111, 1N3085, 1N5162 Series	Units	Conditions
$I_F(AV)$	Max. average forward current	150*	A	180° sinusoidal conduction Max. $T_C = 150^\circ C$
I_{FSM}	Max. peak one-cycle non-repetitive surge current	2,850	A	Half cycle 50 Hz sine wave or 6 ms rectangular pulse Following any rated load condition and with rated V_{RRM} applied
		3,000*		Half cycle 60 Hz sine wave or 5 ms rectangular pulse
		3,400		Half cycle 80 Hz sine wave or 5 ms rectangular pulse
		3,550		Half cycle 80 Hz sine wave or 5 ms rectangular pulse Following any rated load condition and with V_{RRM} applied following surge = 0
I^2t	Max. I^2t for fusing	41,000	A ² s	$t = 10$ ms With rated V_{RRM} applied following surge, initial $T = 200^\circ C$.
		37,500		$t = 8.3$ ms
	Max. I^2t for individual device fusing	58,000		$t = 10$ ms With $V_{RRM} = 0$ following surge, initial $T = 200^\circ C$
		53,000		$t = 8.3$ ms
I_A^2/t	Max. I_A^2/t for individual device fusing ①	580,000	A ² /s	$t = 0.1$ to 10 ms, $V_{RRM} = 0$ following surge.
V_{FM}	Max. peak forward voltage	1.2*	V	$I_F(AV) = 150$ A (471 A peak), $T_C = 150^\circ C$

THERMAL-MECHANICAL SPECIFICATIONS

T_C	Max. operating case temperature range	-65° to 200°	$^\circ C$	
T_{stg}	Max. storage temperature range	-65° to 200°	$^\circ C$	
R_{thJC}	Max. internal thermal resistance, junction-to-case	0.25*	deg C/W	DC operation
R_{thCS}	Thermal resistance, case-to-sink	0.10	deg C/W	Mounting surface flat, smooth, and greased
T	Mounting torque Min.	14.1 (125)	Nm (lbf-in)	
	Max.	17.0 (150)		
wt	Approximate weight	91 (3.2)	g (oz)	
*	Case style	DO-205AC (DO-30)		JEDEC

① Basic part number indicates cathode-to-case. For anode-to-case, add "R" to part number, e.g. 1N3086R.

*JEDEC registered values.

② I^2t for time $t_x = I_A^2 \sqrt{t} \cdot \sqrt{t_x}$

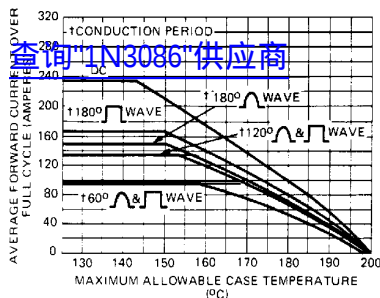


Fig. 1 - Average Forward Current Vs. Maximum Allowable Case Temperature

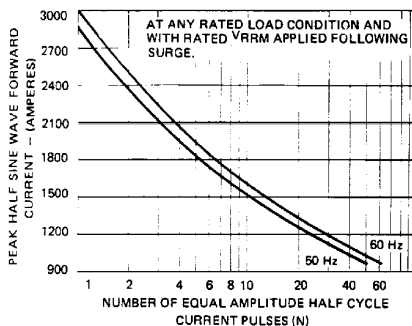


Fig. 3 - Maximum Non-Repetitive Surge Current Vs. Number of Current Pulses

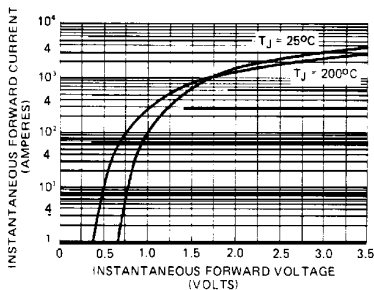


Fig. 4 - Maximum Forward Voltage Vs. Forward Current

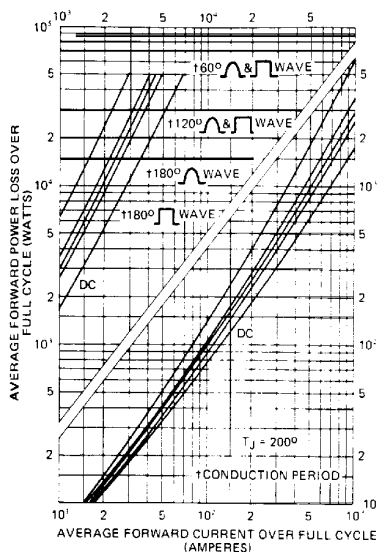


Fig. 2 - Maximum Forward Power Loss Vs. Average Forward Current

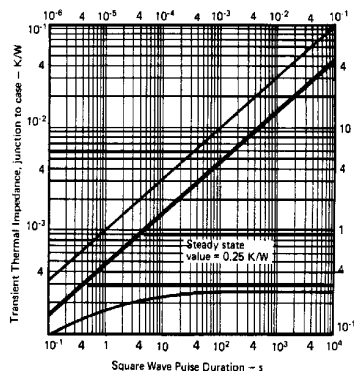


Fig. 5 - Maximum Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration