



T-46-07-11

DM54ALS374/DM74ALS374

Octal TRI-STATE® D-Type Edge-Triggered Flip-Flop

General Description

These 8-bit registers feature totem-pole TRI-STATE outputs designed specifically for driving highly-capacitive or relatively low-impedance loads. The high-impedance state and increased high-logic-level drive provide these registers with the capability of being connected directly to and driving the bus lines in a bus-organized system without need for interface or pull-up components. They are particularly attractive for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The eight flip-flops of the ALS374 are edge-triggered D-type flip-flops. On the positive transition of the clock, the Q outputs will be set to the logic states that were set up at the D inputs.


A buffered output control input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus lines significantly.

The output control does not affect the internal operation of the flip-flops. That is, the old data can be retained or new data can be entered even while the outputs are off.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range
- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Functionally and pin-for-pin compatible with LS TTL counterpart
- Improved AC performance over LS374 at approximately half the power
- TRI-STATE buffer-type outputs drive bus lines directly

Connection Diagram

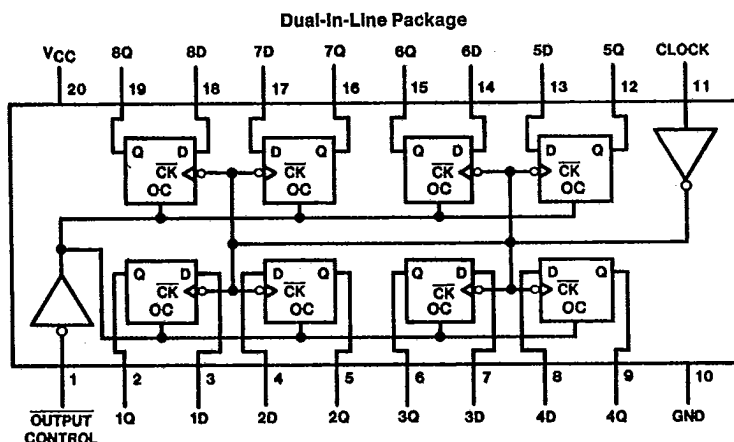

Order Number DM54ALS374J, DM74ALS374WM, DM74ALS374N or DM74ALS374SJ
See NS Package Number J20A, M20B, M20D or N20A

TL/F/6113-1

Absolute Maximum Ratings

T-46-07-11

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage 7V
Input Voltage 7V
Voltage Applied to Disabled Output 5.5V

Operating Free Air Temperature Range
DM54ALS -55°C to +125°C
DM74ALS 0°C to +70°C

Storage Temperature Range -65°C to +150°C

Typical θ_{JA}
N Package 57.0°C/W
M Package 76.0°C/W

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	DM54ALS374			DM74ALS374			Units
		Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage	4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High Level Input Voltage	2			2			V
V _{IL}	Low Level Input Voltage			0.7			0.8	V
I _{OH}	High Level Output Current			-1			-2.6	mA
I _{OL}	Low Level Output Current			12			24	mA
f _{CLOCK}	Clock Frequency	0		30	0		35	MHz
t _W	Width of Clock Pulse	High			14			ns
		Low			14			ns
t _{SU}	Data Setup Time	10 ↑			10 ↑			ns
t _H	Data Hold Time	4 ↑			0 ↑			ns
T _A	Free Air Operating Temperature	-55		125	0		70	°C

The (↑) arrow indicates the positive edge of the Clock is used for reference.

Electrical Characteristics

over recommended operating free air temperature range. All typical values are measured at V_{CC} = 5V, T_A = 25°C.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{IK}	Input Clamp Voltage	V _{CC} = 4.5V, I _I = -18 mA			-1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = 4.5V	I _{OH} = Max	2.4	3.2	V
		I _{OH} = -400 μA	54/74ALS			V
		V _{CC} = 4.5V to 5.5V	V _{CC} - 2			V
V _{OL}	Low Level Output Voltage	V _{CC} = 4.5V	54/74ALS I _{OL} = 12 mA	0.25	0.4	V
			74ALS I _{OL} = 24 mA	0.35	0.5	V
I _I	Input Current @ Max. Input Voltage	V _{CC} = 5.5V, V _{IH} = 7V			0.1	mA
I _{IH}	High Level Input Current	V _{CC} = 5.5V, V _{IH} = 2.7V			20	μA
I _{IL}	Low Level Input Current	V _{CC} = 5.5V, V _{IL} = 0.4V			-0.2	mA
I _O	Output Drive Current	V _{CC} = 5.5V 54/74ALS V _O = 2.25V	-30		-112	mA
I _{OZH}	Off-State Output Current, High Level Voltage Applied	V _{CC} = 5.5V, V _O = 2.7V			20	μA
I _{OZL}	Off-State Output Current, Low Level Voltage Applied	V _{CC} = 5.5V, V _O = 0.4V			-20	μA
I _{CC}	Supply Current	V _{CC} = 5.5V Outputs Open	Outputs High	11	19	mA
			Outputs Low	19	28	mA
			Outputs Disabled	20	31	mA

Switching Characteristics over recommended operating free air temperature range (Note 1)

查询"54ALS374E/883"供应商

Symbol	Parameter	Conditions	From	To	DM54ALS374		DM74ALS374		Units
					Min	Max	Min	Max	
f_{MAX}	Maximum Clock Frequency	$V_{CC} = 4.5V$ to $5.5V$ $R_L = 500\Omega$ $C_L = 50 pF$			30		35		MHz
t_{PLH}	Propagation Delay Time Low to High Level Output		Clock	Any Q	3	14	3	12	ns
t_{PHL}	Propagation Delay Time High to Low Level Output		Clock	Any Q	5	17	5	16	ns
t_{pZH}	Output Enable Time to High Level Output		Output Control	Any Q	5	18	5	17	ns
t_{pZL}	Output Enable Time to Low Level Output		Output Control	Any Q	6	21	7	18	ns
t_{PHZ}	Output Disable Time from High Level Output		Output Control	Any Q	2	11	2	10	ns
t_{PLZ}	Output Disable Time from Low Level Output		Output Control	Any Q	3	19	3	18	ns

Note 1: See Section 1 for test waveforms and output load.

Function Table

Output Control	Clock	D	Output Q
L	$\uparrow$	H	H
L	$\uparrow$	L	L
L	L	X	Q_0
H	X	X	Z

L = Low State, H = High State, X = Don't Care

 $\uparrow$ = Positive Edge Transition


Z = High Impedance State

 Q_0 = Previous Condition of Q

Logic Diagram

T-46-07-11

[查询"54ALS374E/887"供应商](#)

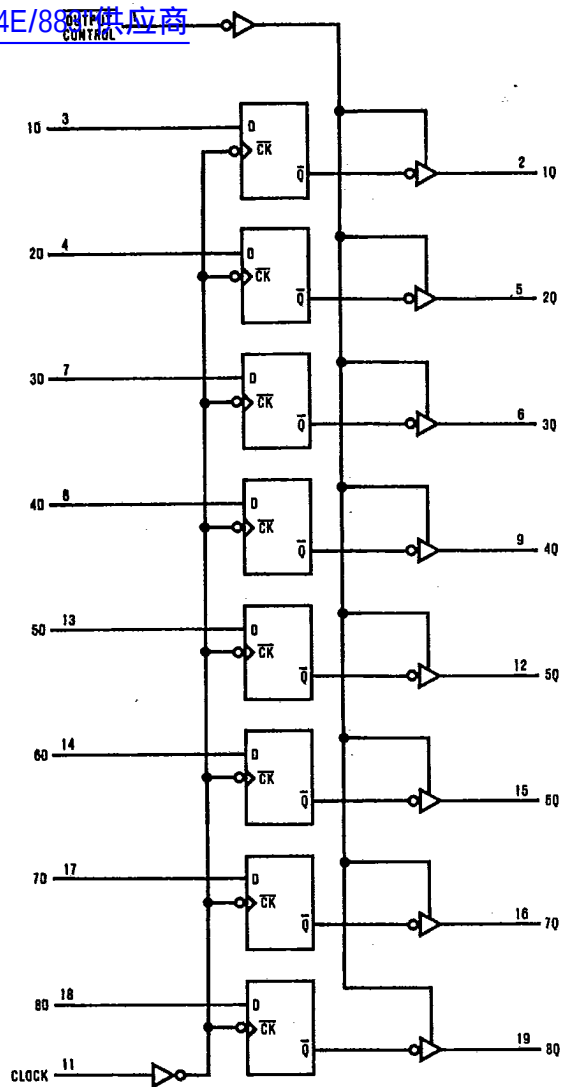

TL/F/6113-2