

[查询"SF8V006S4B"供应商](#)

PLUG IN SIM Card Connector
compatible to GSM 11.11 Standard


CONNECTOR

MB-0194-1


January 2009

SF8 Series

RoHS Compliant

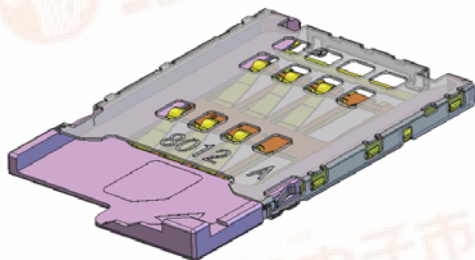

Standard

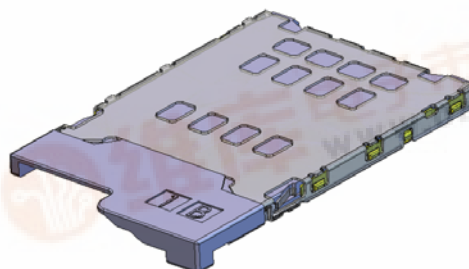

Reverse

SF8 Series is a tray type connector compatible with GSM 11.11 standard Plug in SIM card for GSM mobile phones.


(SIM: Subscriber Identification Module)

Features

- Tray type connector for GSM 11.11 standard Plug in SIM card
- Low profile structure, 1.55mm height, 16.65mm width, 19.3mm depth (26.2mm when card is inserted).
- Two types of mounting, normal (A type) and reverse (B type).
- Connector main body is provided in emboss (compatible to second reflow), tray provided in tray (tray is attached after mounting the main body).
- 4 portions of H/D ensures EMI/ESD countermeasure and gives consideration to prevention of instantaneous interruption caused by falling.
- Retention lock on tray provides click feeling when mated, and makes positioning easier and also prevents falling of tray.

General Specification

- | | |
|-------------------------------------|------------------------------|
| • No. of Contacts: 6pos. | • Rated Current: 10u A to 1A |
| • Contact Resistance: 100m ohm max. | • Insulation Resistance: |
| • Dielectric Withstanding Voltage: | 1000M ohm min. |
| AC500Vr.m.s 1minute | • Lifetime: 5000 times |
| • Operating Temperature: | |
| -40 Deg. C to +90 Deg. C | |




[查询"SF8V006S4B"供应商](#)

Materials and Finishes

Component	Material/Finish
Contact	Copper alloy/0.5u min. Au over Ni (contact area)
Housing	Glass filled LCP/none(UL94V-0)
Cover Frame	Stainless steel/none, Au plating over Ni (terminal portion only)
Tray	POM/none (UL94HB)

Ordering Information

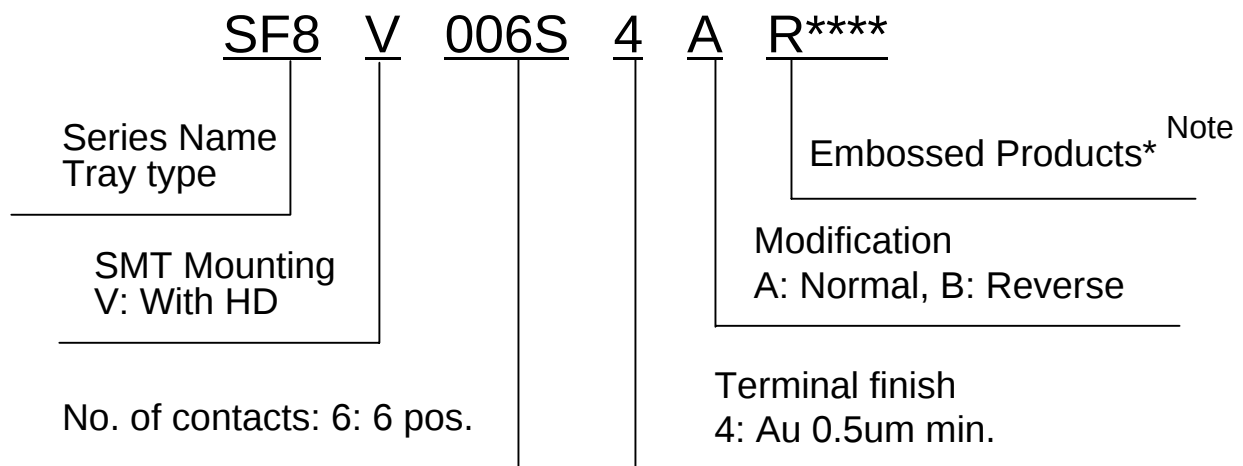



Note) Main body of connector is supplied in emboss, tray in tray packaging.
Please contact us for further information.

Please refer to JAHL-10578 for assembly and handling of connector and tray.

Part Number	SJ Drawing
SF8V006S4A (main body of connector)	SJ109314
SF8-ST51-A (Type A tray)	SJ109315

Standard Mounting Type

Unit: mm

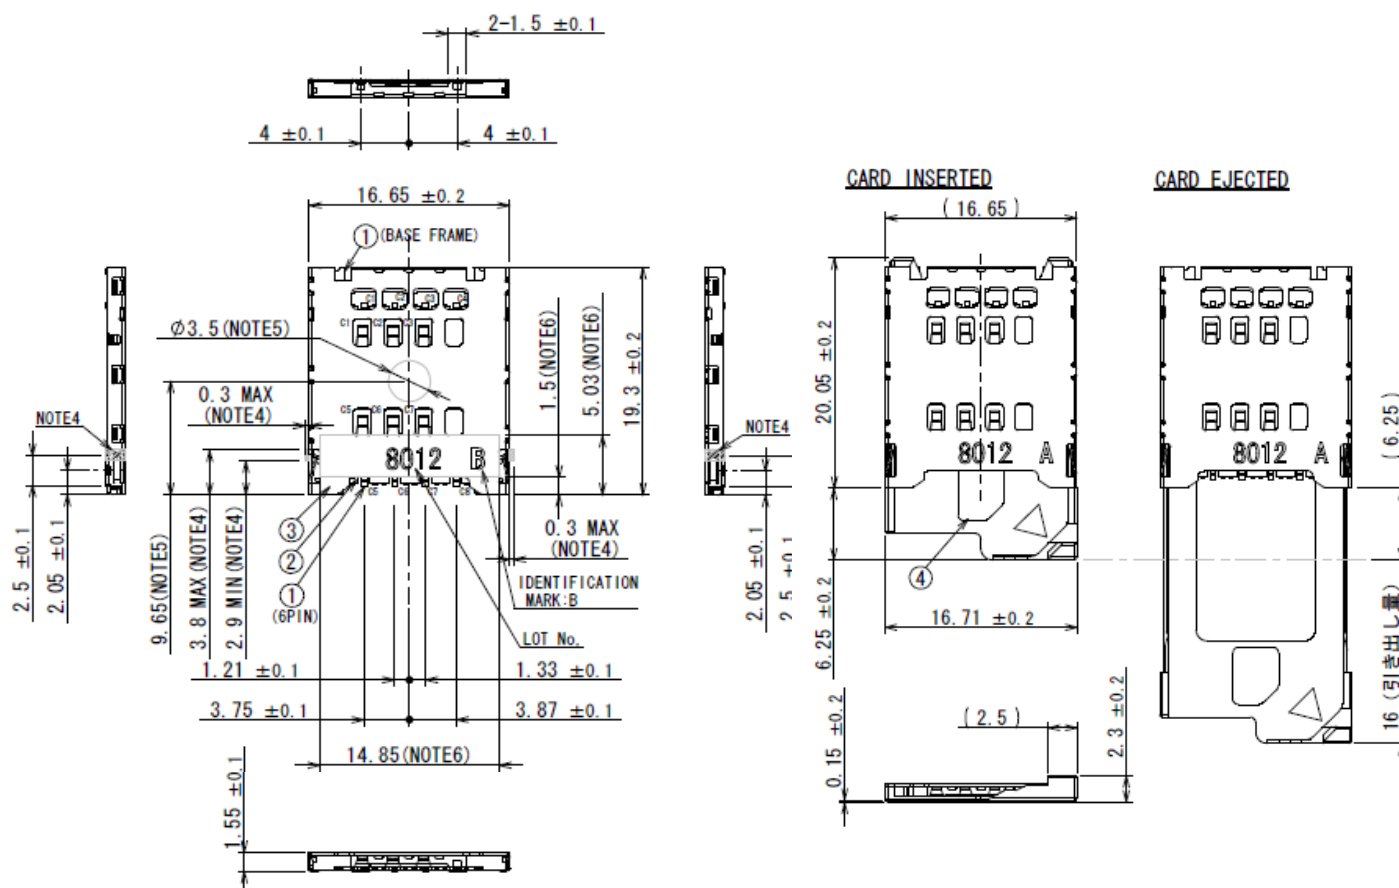

LOCATE THE PARTS (CASE)
170° MIN.
170° 以上になるように
筐体設定願います。

NOTE1. NO PATTERN AND VIA HOLE
SHOULD BE LOCATED IN THIS AREAS.
BUT PATTERN OF GND IS APPROVAL

NOTE2. NO PATTERN AND VIA HOLE
SHOULD BE LOCATED IN THIS AREAS

NOTE3. NO PATTERN, VIA HOLE AND SOLDER RESIST
IN THIS AREAS.

NOTE4. NO PARTS LOCATED IN THIS AREA.

NOTE5. VACUUM AREA

NOTE6. LOT No. & IDENTIFICATION MARK AF

NOTE8. THE THICKNESS OF REINFORCEMENT BOARD IS 0.6MIN,
WHEN THE PRODUCT WILL MOUNT ON EPC.

注1. パターン及びビアホール禁止エリアを示す。
但し、GNDのパターンは可とする

注3. パターン、ビアホール及びレジスト禁止エリアを示す。


注4. 部品搭載不可エリアを示す。

注5. 吸着エリア

注6. LOT No. 及び識別マークエリア (本品 : B)

注7. コポラナリティー0.1mm以下とする。

注8. FPC搭載時の補強板厚は0.6以上とする。

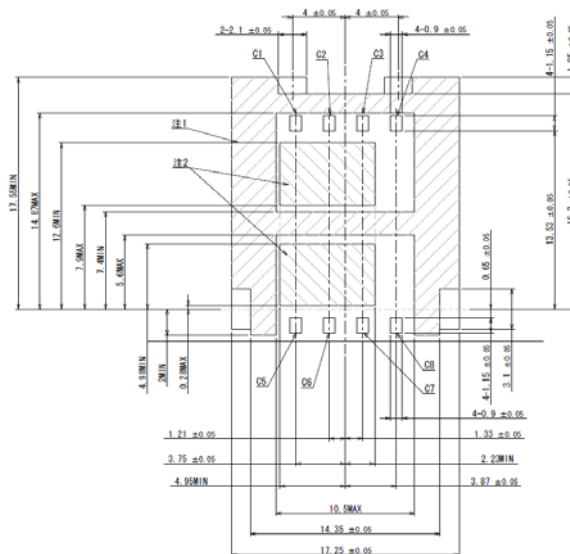

適合基板寸法（参考）




APPLICABLE P. C. B. DIMENSION (REF)

[查询"SF8V006S4B"供应商](#)

Part Number	SJ Drawing
SF8V006S4B (main body of connector)	SJ109289
SF8-STR1-B (Type B tray)	SJ109290


Reverse Mounting Type

Unit: mm

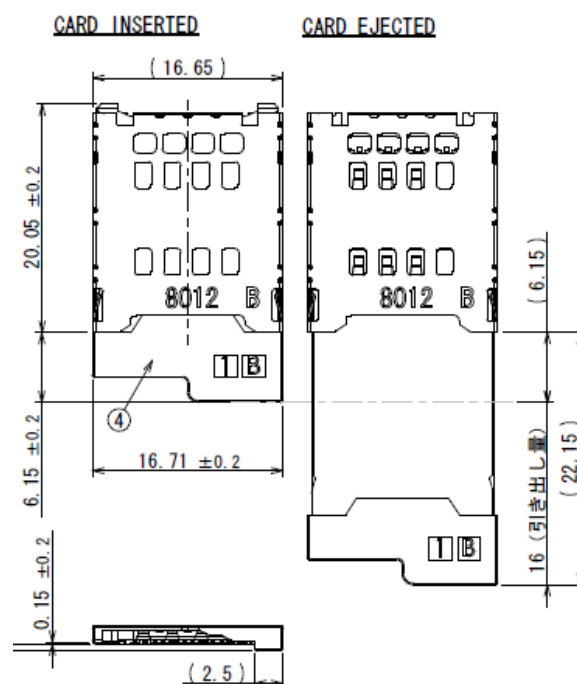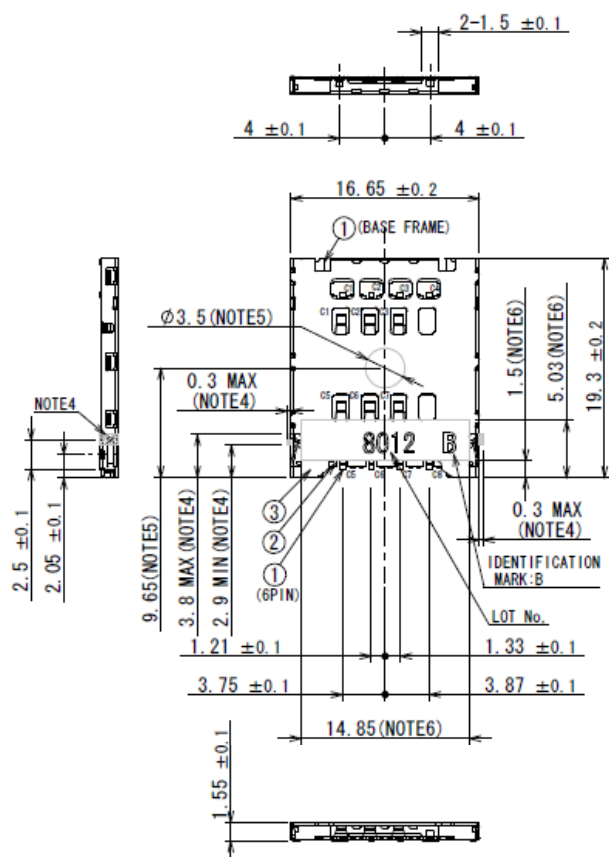

- NOTE1. NO PATTERN AND VIA HOLE SHOULD BE LOCATED IN THIS AREAS. BUT PATTERN OF GND IS APPROVAL.
- NOTE2. NO PATTERN AND VIA HOLE SHOULD BE LOCATED IN THIS AREAS.
- NOTE3. NO PATTERN, VIA HOLE AND SOLDER RESIST IN THIS AREAS.
- NOTE4. NO PARTS LOCATED IN THIS AREA.
- NOTE5. VACUUM AREA.
- NOTE6. LOT No. & IDENTIFICATION MARK AREA.
- NOTE7. COPLANARITY SHOULD BE 0.1mm MAX.
- NOTE8. THE THICKNESS OF REINFORCEMENT BOARD IS 0.6 MIN. WHEN THE PRODUCT WILL MOUNT ON FPC.

- 注1. パターン及びビアホール禁止エリアを示す。但し、GNDのパターンは可とする。
- 注2. パターン及びビアホール禁止エリアを示す。
- 注3. パターン、ビアホール及びレジスト禁止エリアを示す。
- 注4. 部品搭載不可エリアを示す。
- 注5. 吸着エリア。
- 注6. LOT No. 及び識別マークエリア (本品: B)。
- 注7. コプラナリティー0.1mm以下とする。
- 注8. FPC搭載時の補強板厚は0.6以上とする。



LOCATE THE PARTS (CASE)
170° MIN.
170° 以上になるように
筐体設定願います。

APPLICABLE P. C. B. DIMENSION (REF)

=> Please refer to page 3/4.

Japan Aviation Electronics Industry, Limited

Product Marketing Division

Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539

Phone: +81-3-3780-2787 FAX: +81-3-3780-2946

Notice: Products shown in this leaflet are made for the applications listed below. However, if the above-mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for life-support systems, or any other specific application requiring extremely high reliability, please contact JAE for further information.

Recommended applications: Computers, Office machines, Measuring devices, Telecommunication devices (Terminals, Mobile devices), AV devices, Household applications, FA devices, etc.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn